This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

**Usage guidelines**

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.

+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.

+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.

+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

**About Google Book Search**

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

*Price One Shilling.*

# RUDIMENTARY TREATISE

ON THE

# ART OF PAINTING ON GLASS,

OR

# GLASS-STAINING.

BY DR. M. A. GESSERT.

---

TO WHICH IS ADDED

AN APPENDIX ON THE ART OF ENAMELLING, &c.

LONDON: JOHN WEALE, 1851.



# RUDIMENTARY TREATISE

ON THE

# ART OF PAINTING ON GLASS,

OR

# GLASS-STAINING:

COMPRISING

DIRECTIONS FOR PREPARING THE PIGMENTS AND FLUXES,
FOR LAYING THEM UPON THE GLASS,
AND
FOR FIRING OR BURNING IN THE COLOURS.

---

FROM THE GERMAN OF

DR. M. A. GESSERT,
AUTHOR OF 'THE HISTORY OF GLASS-PAINTING.'

---

TO WHICH IS ADDED

AN APPENDIX ON THE ART OF ENAMELLING, &c.

---

London:
JOHN WEALE,
ARCHITECTURAL LIBRARY, 59, HIGH HOLBORN.
M.DCCC.LI.

170. m. 43.

HUGHES AND CO., PRINTERS,
KING'S HEAD COURT, GOUGH SQUARE.

# CONTENTS.

INTRODUCTION . . . . . p. 1–4

CHAPTER I.

On the Pigments and Fluxes, and the Methods of Preparing them . . . . . 5–41

CHAPTER II.

On the Process of Laying the Colours upon the Glass . . 42–53

CHAPTER III.

On the Process of Firing, or Burning in the Colours; and the Construction of Ovens . . . . . 54–60

CHAPTER IV.

On the Operation of fixing together or Leading Mosaic Glass . . . . . 61–62

## APPENDIX.

On the General Nature of Enamel-Painting . . . . . 63–65

On the Art of Gilding Enamel and Glass by Burning . . 66–72

On the Taking of Mezzotinto Prints on Glass, and Painting upon them with Oil, Water, or Varnish Colours . 73–74

On the Devices employed for the more easily obtaining a

just Outline in making Designs from Nature; and the various Methods of Off-Tracing, Calking, and Reducing Pictures, Prints, or Drawings . . . . . *p.* 74–89

On the Colouring or Washing Maps, Prints, &c. . . . 89–92

# RUDIMENTARY TREATISE

ON

# THE ART OF PAINTING ON GLASS,

OR

# GLASS-STAINING.

## INTRODUCTION.

1. The beautiful art of glass-painting is not only restored, in our day, to the perfect fulness of its ancient splendour, but also has acquired, through the giant strides of the science of chemistry, and the great progress latterly made in the arts of design, an amount of technical and æsthetical power, far exceeding whatever could formerly be called to its aid.

Notwithstanding this advantage, however, the art has not yet reached that wide state of diffusion which, from the exquisite effects it is capable of producing, it deserves, and which it attained in the olden time, even with its then more limited capabilities.

2. This circumscribed use of glass-painting can scarcely be accounted for by a comparison of the religious circumstances of our age with those of the past, or on the supposition that this art, confining itself exclusively to exhibition in sacred edifices, had therefore been lost among the

frivolous tastes which at present prevail. On the contrary, the works of the finest masters of the art have shown that the wonderful effects of glass-painting may be brought into use for other purposes than the service of the Church, and may be made to satisfy not less the worldly demands of our generation, than the more devotional feelings of the middle ages.

The obstacles which, on the revival of the art, have interposed to check its further extension, and therefore to diminish also the general demand for its productions, are much rather to be attributed to those in whose hands it rests, than to any thing properly belonging to itself; they originate, in fact, less in the art than with the artists.

3. One of the principal causes of the earlier decay of glass-painting was, that its rules being based so entirely upon empirical principles, those who practised it were accustomed to consider the knowledge they had acquired in the thorny path of tedious and long-continued experiment, as their most valuable personal property, forming at once the means of their subsistence, and the foundation of their future artistical fame. They therefore not only kept the information they had gained profoundly secret during their lives, but even carried it with them to their graves, in preference to leaving it behind them to be made use *of by their scholars.*

This easily intelligible, but not on that account the less reprehensible egotism,—this avarice for artistical monopoly, also operates in some measure to damp the speculative ardour of the present day, and constitutes, in fact, the primitive cause of the evil of which we complain.

On the other hand, the most conducive element towards the full and free development of power generally, and particularly of artistical talent, is competition. It multiplies production, invites public judgment and comparison, and calls forth a laudable emulation, tending, in return, not only to promote the excellence of the works produced, but, by aiming at popularity, also to create an ever new demand for their increase and multiplication.

4. The directions which form the principal part of the following pages have already been published at different times, in earlier communications of the same author scattered through German scientific periodicals, but have now been collected, enlarged, improved, and remodelled into the present form, in the hope that their more general circulation may put into the possession of the many that information which was formerly jealously guarded by the initiated few, and thereby such a general interest may be promoted as cannot fail to be beneficial to the art.

The recipes have been carefully selected, and their correctness and efficacy proved by many

years' practice; and it has been endeavoured to make them so easy of comprehension, that neither those unacquainted with chemistry shall fail in their preparation, nor those unpractised in the art go astray in their application.

5. In the classification of the pigments into Fused and Mixed Colours, (understanding by the first all those which are fused into a glaze together with the flux before laid on, and by the second all colouring bodies burnt into the glass without such previous process, whether requiring the help of a flux or not,) the theory given by the Author in his late work on the 'History of Glass Painting' has been adhered to. This division has the advantage of avoiding those errors which had their origin in the early homonymic of *flux*, for the oxide previously melted with the flux, and for the fluxing medium itself.

It is hoped that these few pages may be the means of prompting, not only artists by profession, but also amateurs, to such an increased and successful exercise of the art, as may tend to show forth its beauties and capabilities to the world in a more general and extended manner than heretofore.

# CHAPTER I.

## OF THE PIGMENTS AND FLUXES; AND THE METHODS OF PREPARING THEM.

6. GLASS PAINTING OR STAINING* may be defined to mean, the art of painting on transparent glass (either colourless or already coloured in the process of its manufacture) with vitrescible metallic colours, which are afterwards burnt into the surface of the glass on which they are laid, leaving it more or less transparent.

7. All colours used in glass-painting are oxides of metals, or other metallic combinations.

They may be divided into two principal classes—

1. Those whose colouring base, or the oxide, is laid upon the glass simply in its original combination with an earthy vehicle.

* The words 'painting' and 'staining' seem to be used in English synonymously with reference to this art. The former of these has been adhered to throughout this work, not only because it is more in accordance with the German expression, but because it appears more calculated to secure to this species of decoration a place (which it decidedly deserves) among the fine arts; whereas, the word *staining* might simply mean the *colouring* of glass, without any reference to design.—TR.

2. Those whose colouring base, or the oxide, must be made to adhere by the help of a glassy body,—namely, the flux.

8. The colours which require a flux may be divided again into—

1. Those in which the oxide unchanged, but only *mixed* with the flux, is attached to the glass.
2. Those in which the oxide requires to be vitrified, by previous *fusion* with the flux, before it is laid on the glass.

The last may be called *Fused Colours*, all others *Mixed Colours*.

9. The classification above given may be made clearer by the following explanatory remarks.

Glass-painting is distinguished especially from other illuminating processes, in that the colours and the foundation on which they are laid must, in this art, be fused together in the kiln.

Now, some few colours combine with the surface of the glass, at the temperature of fusion, without further previous preparation than the simple laying on; wherefore these give to the glass only a colouring cementation or stain.

Others, on the contrary, in consequence of their peculiar nature, can only be made to combine with the glass, by fusing them, upon its surface, into another thin sheet or layer of coloured glass.

This is done by means of the *flux*, a vitreous compound, which fuses more easily (*i. e.* at a

lower temperature) than the foundation, the glass plate.

10. The flux may be used in two ways. With some colours it may be simply mixed before they are laid on, so as to combine, at the temperature of fusion, with their oxides, and to unite these again with the surface of the glass; but in other cases the flux must, before painting, have entered into a chemical combination with the oxides, *i. e.* must have been fused together with them into what may be called a *Fused Colour*, which latter, after being pulverized, serves as a pigment.

This process is rendered necessary in consequence of the difficulty of fusion of certain oxides, which, in order to combine with the flux, and to acquire the intended shades of colour, require a greater degree of heat than could be made use of in burning the colours upon the glass, without endangering the success of the operation.

From this description of the nature of the colours and the manner of their combination with the glass, we will now pass on to the practical directions for their preparation and use; in assurance that the foregoing will not only prevent erroneous notions being formed of the nature of the different elements entering into the operations, but may tend to the perfect understanding and successful practice of the directions given.

Those for white and black pigments are given first, the others follow in order.

### I. WHITE.—FUSED COLOUR.

11. Two parts of bone glass,* with one part minium, or red lead, are to be mixed together and melted in a covered Hessian crucible placed in a wind furnace. The mixture is then to be poured out into a flat vessel containing pure cold water, and, when cooled, is to be ground with a glass muller on a table of thick sheet glass.

### MIXED COLOURS.

12. One part of bones calcined to whiteness, with two parts of flux, ground together on a glass plate.

*Flux.* Glass of lead (flint glass).†

13. One part white oxide of tin, with two parts of flux, ground as before.

*Flux.* Lead glass.

14. *Preparation of the oxide of tin.*—Melt in a covered crucible one part of pure tin cuttings. When in fusion, add two parts of nitre and stir well the mixture with an iron rod. The crucible is then to be again covered, placed in burning charcoal, and the mixture occasionally stirred as before from time to time, until it begins

* Made by fluxing together eight or ten parts of calcined bones (bone ash), and eight of red lead, with about 80 of white glass.

† German *Bleiglas.* This, however, contains more lead than exists in our English flint-glass: a recipe for it, in one of the German Encyclopædias, is 15 parts dross of lead, and 12 parts common glass frit. The ordinary flint-glass may be made to serve by adding minium to it, and trials will show the best proportions. *See Art. 88.*

to get white on the top. Continue the stirring a little longer, then pour the mass out of the crucible into an agate mortar and let it cool. It is then to be pulverized, boiled in water, and afterwards dried.

### II. BLACK.—MIXED COLOURS.

15. Two parts oxide of copper (prepared by heating nitrate of copper to redness), and one part flux.

*Flux.* Equal parts of crystallized borax, minium, and pounded glass, are to be mixed and melted in a crucible for about an hour or an hour and a half, in a wind furnace, then to be poured in a vessel of water, afterwards dried, and powdered on a glass plate.

16. Some oxide of iron, or of manganese, added to the former, gives that brownish tone of colour which was so peculiar to the ancient glass-paintings.

17. One part black protoxide of iron, (prepared by mixing red oxide of iron with olive oil to a moist powder, and afterwards heating the mixture in a crucible till the oil is evaporated,) one part of protoxide of copper, (prepared by submitting green carbonate of copper to a red heat, and washing it in water,) and two and a quarter parts flux.

*Flux.* Two parts lead glass, ground to a

proper degree of fineness on a copper plate, or colour stone, with water, and one-fourth of a part gum-arabic. The latter to be added after the pigment is mixed with the glass. All are then to be ground as delicately as possible together.

18. One part oxide of cobalt, one part oxide of manganese, one part copper ashes,* and one part iron scale from a smith's forge, mixed together and heated, at first gently, but afterwards with a very strong heat, until the mixture runs freely. It is then to be poured into water, and, when cold, pulverized, mixed with twelve parts of flux, and ground fine.

*Flux.* One part pure white sand, and three parts litharge, are to be melted together till they flow freely, and then poured out on to a warm marble plate, or into an iron mortar; when cold, to be pounded fine and washed out with water, in order to remove any reduced lead which may be present.

19. Two parts black protoxide of iron, with two and a quarter parts of the flux described in Art. 17, and treated in the same manner.

20. One part iron smithy scales, three parts oxide of copper, and four parts calcined antimony, treated as in No. 18, and ground with three parts of flux.

* An oxide or dross of copper of a coarse kind, known to the smelters.

*Flux.* One part of sand, and three parts litharge, treated as in No. 18, and ground fine with one-third borax. The borax must be prepared in the following manner: a crucible is to be half-filled with it, and put in burning charcoal until the borax becomes spongy, or is calcined. It is then to be thrown into another crucible and melted in a strong fire to a clear flowing mass, which is to be poured into cold water, and, when cold, ground fine.

21. One part of purple (see its preparation further on), three parts oxide of cobalt, three parts iron smithy scales, six parts calcined antimony, and three parts copper smalt,* treated as in No. 18, and mixed with three parts of flux.

*Flux.* One part sand, and two and three-quarter parts litharge, are to be treated as in No. 18, and ground fine with three-eighths of a part of borax prepared as above described.

22. Treat three parts oxide of cobalt, three parts oxide of copper, three parts iron smithy scales, and four parts antimony, with three parts of flux, as described in Nos. 18, 20, and 21.

*Flux.* One part sand, two parts litharge, and one-fourth part borax, treated as described in No. 20.

23. Two parts black oxide of copper, with two

* Copper oxide fused with glass and ground.

and a quarter parts of the flux described in No. 17, and used in the same manner.

24. A beautiful blue-black may be obtained by adding a small part of oxide of cobalt to the pigments in either Nos. 17, 19, or 23.

25. A black inclining to brown is produced by a similar addition of oxide of manganese.

26. Dull or dead black, for distances, is procured from one part of copper smalt and one part crude antimony * calcined (but not so far as to lose its blackness), ground together. Or,

27. One part copper smalt, and one part uncalcined oxide of manganese, treated as before. Or,

28. One part purple, one part oxide of cobalt, and one part oxide of manganese, ground fine together.

### III. RED.—FUSED COLOURS.

29. One part oxide of iron, (obtained by heating clean iron nails red-hot, dissolving them in nitric acid, evaporating the solution slowly by a gentle fire, and roasting the residuum,) three parts flux, (consisting of one part sand, one part litharge,†

* The common ore of antimony; the sulphuret.

† *Note.*—It may be understood here, once for all, that where sand and litharge are used as flux, as directed in Arts. 32, 36, 40, and 73, both these ingredients must be pounded together, melted in a crucible by a strong fire, poured into an iron mortar,

and one-fourth part borax glass*), well fused together, until a glass rod, with which the mass is to be stirred, draws fine and clear threads from it; then the crucible, with its contents in it, is to be thrown into water, and when cool, the pigment may be separated, pulverized in an agate mortar, and ground fine on a grass plate.

30. One part oxide of manganese with eight parts of flux (one drachm of sand, and three drachms litharge), melted together and treated as above.

### MIXED COLOURS.

31. One part sulphate of iron, free from copper, or oxide of iron precipitated from the sulphate, more or less heated, with two to three parts flux ground together, give all shades from a light red to a blueish violet.

*Flux.* Six parts white silicious sand washed and calcined, four to five parts yellow oxide of lead, and two to three parts sub-

---

pounded fine when cold, and finally washed out with water, before they are added to the pigment.

But where sand, litharge, and *borax glass* are indicated for flux, as in Nos. 42, 69, 78, and 84, the sand and litharge are, as above directed, to be melted and pulverized by themselves, but the borax glass is only to be ground with this latter powder, *and not again melted with it.*

This remark will save the trouble of repeating the same directions in the above-mentioned articles.

* German *Boraxglas*, fused borax.

oxide of bismuth (made from the nitrate) finely powdered, and intimately mixed in a porcelain mortar: the mass may then be thrown into a covered crucible previously brought to a red heat, and stirred frequently with a steel rod until it flows freely. It is afterwards to be poured into water, then dried, powdered, and passed through a fine sieve.

32. Common red is given by one part of sulphate of iron heated by a strong fire, washed four or six times in hot water, dried, and finely ground on a glass plate, with three parts of flux.

*Flux.* One drachm of sand, and three drachms of litharge.

33. In order to give a fixedness to the colcothar, or crocus martis,* which otherwise is very fugitive, it is proper to calcine it with fine white sea-salt, previously brought to a half-glowing heat in a covered crucible; equal parts of each are then to be ground well together in an agate or glass mortar; a crucible is to be filled with the composition, and kept for two hours in an increasing fire till it is surrounded with burning coals on all sides; it may then be removed, the mass cooled, pounded perfectly fine, and washed three or four times with hot water, stirring it carefully each time with a glass tube, in order to wash the salt entirely away. When the water no longer takes

* Yellow or reddish oxide of iron.

a red tinge, it is to be poured carefully off, the mixture again washed with cold water, dried, and ground with one part of the before-mentioned flux for use. For greater certainty the sea-salt may, previous to using, be dissolved, filtered, and recovered by evaporation of the water. Lastly, it is particularly to be advised to employ in the whole process, crucibles which have not previously been used.

34. Equal parts of yellow oxide of iron (iron ochre), yellow oxide of lead or lead glass, glass of antimony, sulphuret of copper, and sulphuret of silver, ground fine together with water, and laid on the glass without the addition of any flux.

35. One part of silver which contains copper (as for example, that of which the German small coin is made), with two parts of raw antimony (sulphuret of antimony, the common ore), melted together, reduced to powder, and mixed with red oxide of iron or colcothar. This pigment also is used without flux, and is (as is the former) to be laid on in a tolerably thick layer, which will stain the surface of the glass red at the proper temperature of fusion. What remains on the surface afterwards may be removed with a spatula.

36. One part silver, two parts red antimony, and one part sulphur, melted till clear; and mixed, for use, with two parts flux.

*Flux.* One drachm sand, and two drachms litharge.

37. Two parts red oxide of iron, one part litharge, one part gum, one part lead glass, and six parts of best red chalk.

The lead glass is first to be ground as fine as possible on a glass table, then the litharge, the gum, and the oxide of iron are to be added; and after these are all properly mixed together, the pounded red chalk. The whole must now be gently ground and mixed in a tall glass, with as much water as will make it the consistence of thin syrup; say four or five ounces. If the operation takes place in summer, the glass is to be put in the sun; if in winter, in the warmth of a stove, and the fluid must be most carefully preserved from all dust, yet without preventing evaporation by close covering. This is best done by inverting a glass bell over it, on whose sides the moisture will collect and flow away. The fluid must remain still three days; all the thick matter will sink and adhere to the bottom of the glass, while the liquid shows itself above on the sides in transparent rings of a beautiful red colour. It is now to be carefully poured off, more water added, as before, and the operation repeated as long as any colour can be obtained from the sediment. The colour is then to be dried in a glass colour-dish by the help of a gentle heat (best by placing it in the sun), and carefully preserved. While it is yet in a fluid state or moist, it always appears more lively and clear than when quite dry. In the latter state

it is to be used like gamboge, but without grinding, which would destroy its transparency and beauty. If properly prepared and used, however, this colour excels in both these qualities the most beautiful red of the ancients.

38. Brick-red is given by one part oxide of iron, and twelve parts ochre yellow (prepared from one part oxide of iron, produced from the sulphate, and one part oxide of zinc), mixed with five parts flux.

*Flux.* One part sand, three parts minium, and one-eighth part calcined borax; finely ground, mixed, melted, and thrown into water, dried and pounded, as described in No. 31.

39. Flesh-red is obtained by melting sulphate of iron and alum, in a coarsely powdered state, and increasing the heat till the appearance of the desired colour. The residuum is to be washed with hot water, and one to two parts of flux added thereto.

*Flux.* Six parts white sand, washed and heated to redness, four parts yellow oxide of lead, one part borax glass, and one part saltpetre, treated as in Art. 31.

40. For dull or dark red, one part of prepared blood-stone * is to be pounded and ground on a glass plate, with three parts of flux.

* Hematite. The kidney iron ore of Cumberland.

*Flux.* One drachm sand, and two drachms litharge.

41. Purple, gold-purple, purple of Cassius, is obtained by precipitation from a solution of chloride of gold, by means of a solution of proto-muriate of tin. It receives, according to the greater or less quantity of tin in the mixture, and the lower or higher degree of oxidation of the solution, either a beautiful red colour of various shades, as scarlet, carmine red, rose colour, flesh colour, &c., or a violet or brown.

It is to be mixed for use with four parts of flux.

*Flux.* One part of silica in powder (made by calcining the purest flint three or four times in a crucible, washing it every time in pure water, then powdering it in a porcelain mortar, and sifting it through a fine sieve), one and a quarter part borax glass, and five-eighths of a part minium, melted together, and finely powdered.

42. Dissolve one part of thin-beaten gold in nitro-muriatic acid, or aqua regia, pour the solution into a glass, and dilute it with fifteen parts rain-water. Throw in one and a half part of pure tin cuttings, which have been dissolved in muriatic acid, and allowed to get cool.* While this is being added to the gold solution, the liquor must

* Literally from the original; probably it is this quantity of the *muriate thus formed* which is to be poured into the gold liquor.

be continually stirred. After the mixture has stood quietly a quarter of an hour, half a part of clear urine is to be added, and all well stirred together. In about two hours the supernatant fluid is to be poured from the purple pigment, which will be found precipitated, and which is to be well washed out. When perfectly dried, put it in a flat porcelain vessel, lay a piece of paper upon it, and place it on burning charcoal till the paper is charred.

The purple pigment must be used with twelve parts of flux.

*Flux.* One part sand, two parts litharge, and three-fourths of a part borax glass.

43. Dissolve gold * in aqua regia. If the gold has been alloyed with silver, the solution must be poured off from the chloride of silver, which separates itself. The precipitate must be washed with some distilled water, and this latter added to the solution, which must then, unfiltered, be evaporated by a moderate heat until a thick crystalline saline skin is formed, under which, by inclining the vessel to one side, only a little of the red solution will be found liquid. The mass is now allowed to get cool, whereby it becomes thoroughly hard; it must be dissolved without delay in ten times its weight of water, and filtered, by which a small quantity of reduced gold is left behind. In order to cleanse the filter, a small

* The German gold coins are alloyed with silver.

quantity of water must be reserved out of the prescribed weight, and afterwards this must be added to the solution.

For the preparation of the tin liquor, the crystallized salt of tin * will answer very well; if it is moist, it must be dried by pressing it between unsized paper.† One part of the salt is to be dissolved in four parts of distilled water, the solution filtered, and used immediately after its preparation, as after a time it would become turbid by attracting oxygen from the atmosphere, and would deposit oxide of tin in a white powder.

Further, dissolve one part of gum-arabic in three parts of hot distilled water, and filter it through gray blotting paper, which must be of a loose texture, or the gummy fluid will not pass through it freely.

Having now prepared the three fluids in the above-mentioned manner, mix three ounces of distilled water with twenty-eight grains of the gum solution, stir it carefully, and introduce fourteen grains of the tin solution. Rinse out the vessel in which the latter was weighed with a little water; weigh twenty-three grains of the gold solution and add it to the previous mixture, rinsing out the vessel again, but this time, instead of clear water, a portion of the compounded mixture is to be used for the purpose. The

* The muriate.

† *Druckpapier*, printing paper, which in Germany is unsized.

colour which arises during the mixing of the fluids is a fiery red brown, but changes when burnt in upon the glass into the most beautiful purple red.

The colour may possibly be somewhat altered by the action of the acid liberated by the formation of the purple precipitate in the fluid; but this is obviated by diluting it with twice its weight of water, dissolving ten grains of bi-carbonate of potash in the same, and then first mixing it with the above-mentioned mixture of the gum and tin solutions.

In order to separate the purple, whose precipitation is at present hindered by the gum, spirit of wine is to be added to the mixture until it appears very turbid: for this purpose, about double its weight of 75 per cent. spirit is necessary, if the bi-carbonate of potash has been added, otherwise three times the weight. In the course of an hour, if the mixture has been occasionally stirred during the time, the purple falls down in red-brown flakes, and the fluid remains clear, or at least very little coloured. This must then be decanted, some more spirit of wine poured over the precipitate, and the whole dropped into a filter. It must afterwards be gently pressed out between blotting paper, the precipitate removed, and ground in a rubbing dish or saucer, with weak 50 per cent. spirit of wine, to a thin pulp, which is to be heated* three minutes in a suitable vessel, and

* *Kochen*,—literally, boiled or cooked.

then poured into a cylindrical glass. This operation is to be repeated, and the gum will then be all removed except a little harmless remnant, which is essential to be done. Should the purple fall slowly from the last solution, and exhibit an inclination to re-dissolve, or form a clear red sheet tight upon the bottom, a little more strong spirit of wine must be added after the water is poured off, so that the purple may be made to coagulate to a thicker consistency, and the last portion of fluid afterwards filtered away. The precipitate must, as before, along with the filter, be pressed between blotting paper, taken off with a blunt knife, and dried in a porcelain dish, whereby it becomes much reduced in size, and takes a perfectly dull colour.

For use, the purple is to be levigated on a stone with water, until a clear deep-coloured thickish fluid is obtained. Two to six * parts of flux are then to be added, the levigation continued, and afterwards the whole dried in a porcelain dish. It may then be made fit for the pencil with thickened oil of turpentine, like other glass-painting colours.

*Flux.* Eight parts white silicious sand, washed and calcined, four parts borax glass, one part saltpetre, and one part white chalk: treat as in Art. 31.

* For the reason of the indefinite proportions given here and in *some other places*, see Art. 88.

### IV. BLUE.—FUSED COLOURS.

44. Three parts oxide of cobalt, prepared in the following manner. Clean, roasted cobalt ore (zaffre) is to be dissolved in pure diluted nitric acid, at a gentle heat, until the solution is saturated; add water, precipitate the oxide with carbonate of soda, and wash the precipitate with hot water. It is then to be dried, mixed with three times its weight of pure dry nitre, placed in a crucible, and ignited with live coals. When the slight decrepitation is over, the oxide of cobalt is to be heated to redness, washed out, and dried. Three parts of this must now be melted with two to five parts of flux (composed of* eight parts washed silicious sand, four to six parts borax glass, one to two parts nitre, and one part white chalk), melted in a strong fire for an hour and a half, and ground fine for use.

45. If the cobalt ore can only be obtained raw, and it becomes necessary to roast it, the best Spanish or Swedish must be chosen, which may be tried by solution in nitric acid, diluted with two-thirds of water. The ore which gives the finest red colour in the solution is the best for the purpose, and should be chosen for the preparation of the colour. In order to free it from arsenic, it must be laid on and surrounded with

* A misprint in the original alters the meaning of this passage; but the sense given in the text is evidently the true one.

charcoal on all sides, and burnt until the arsenic is deposited in white crystals on the walls and stones around, and the cobalt has attained a more metallic state and lustre. This operation, however, it must be remarked, requires the greatest care and precaution, on account of the dangerous vapours which arise; and if a place is not properly set apart for it, it should be performed in the open air.

46. Another blue fused colour is given by one part oxide of cobalt, and four parts borax glass, melted by a strong fire for four hours. The difficulty of fusion of the cobalt requires that this colour should be ground, for use, with two parts of flux, obtained by melting together one part rock crystal, and one part borax glass, throwing them in water and grinding them fine.

47. For dark blue, mix intimately four parts king's smalt, and about two and a half parts minium, in a porcelain mortar: set the mixture in a glazed crucible in a very strong fire, until perfectly clear glassy threads of a beautiful azure blue can be drawn from the mass. It must then be taken out of the crucible with a hook, dropped into cold water, and afterwards dried and finely powdered for use.

The proportion of minium must be varied according to the variable fusibility of the smalt which is used.

*48. One* part black oxide of cobalt, six parts

powdered white glass, and two parts minium; then two parts nitre; treated as the foregoing.

49. One part king's blue is to be melted with three parts borax glass, pounded, and then ground with two parts of flux of the same kind, and treated in the same manner as No. 46.

50. Light blue is given by equal parts of best king's smalt, white glass (pounded in a bright iron or porcelain mortar and sifted), and minium, mixed and melted, as in No. 47.

51. Two parts zaffre, eight parts finely powdered white glass, six parts nitre, and six parts minium, mixed, melted, and ground, as the preceding.

## MIXED COLOURS.

52. Let roasted cobalt (ore) stand quietly for two or three days in nitric acid, diluted with two-thirds of water, placing it from time to time in hot ashes. When the mixture has gradually become a clear and fine red colour, pour it very carefully off so as to avoid letting any of the sediment go over with it. To the latter may be added water and more nitric acid, to extract any more red colour which can be obtained from it. The several solutions are to be mixed together in a porcelain vessel.

To six parts of this red solution add two parts of the whitest sea salt, purified as previously

described, and when the latter is dissolved, pour the fluid from the sediment (which is useless) into a porcelain vessel, and set it in hot ashes. Let it evaporate some hours, and as often as new sediment is formed, pour the fluid carefully away. Continue the heating of the latter, and stir it well, especially when it begins to thicken, with a glass rod, until at last it changes into a granulous salt of the most beautiful blue colour. This salt also is to be left an hour or two on the hot ashes, and is then to be put in the open air for a few days until it becomes crimson red. It is then to be replaced in the ashes, when it becomes blue, and again in the air, when it becomes red again, and this process is to be repeated until no more nitrous gas * is evolved when the salt is heated, and until a sample of it, placed in a small glass with a little water poured over it, becomes red in half an hour, without imparting its colour to the water. When this point is arrived at, wash the salt carefully out, dry the now deep red coloured pigment in a porcelain dish, in hot ashes, and bring it once more over glowing charcoal, where it changes into a beautiful constant blue.

One part of this is to be mixed for use with two and a half parts of flux.

*Flux.* One part rock crystal, and one part well fused borax glass, pounded together,

* *Salpeterdünste*, nitrous vapour.

melted, thrown into water, powdered in an iron mortar, and ground fine on a glass plate.

### V. YELLOW.—FUSED COLOURS.

53. Jonquil yellow is obtained by melting together one part antimonic acid, two parts of a calcined mixture of equal parts tin and lead, one part carbonate of soda, and twenty-four parts of flux, composed of one part white silicious sand, washed and calcined, and three parts minium.

54. For citron yellow, mix and melt together two parts sand and six parts litharge; pour the mass into an iron mortar, and afterwards pound it fine. Then mix with it one part oxide of silver, and one-fourth part antimony ore (antimony of commerce), and grind the whole well together; melt by a strong fire in a Hessian crucible; pour in cold water, and grind for use.

### MIXED COLOURS.

55. Mix fine powdered antimony with one and a half times its weight of saltpetre, decrepitate the mass in a glowing crucible, and heat it to redness for a quarter of an hour; powder it when cold, and wash it with boiling water. The remaining white powder, which consists of the bi-antimoniate and bi-antimonite of potash, must be moderately heated in a crucible for an hour, with an equal or

from that to a double weight of minium, and mixed with equal parts of flux for use.

*Flux.* One part white silicious sand, washed and calcined, and three parts minium, ground together, and melted as in Art. 31

56. Uranium ore must be broken to pieces and roasted, afterwards dissolved in nitric acid, the solution filtered, and the lead which may be present precipitated by dropping in sulphuric acid. The clear green solution must then be evaporated to dryness, and kept at a red heat until it is changed into a yellow saline mass. One part of the preparation so obtained is to be ground with three parts of flux.

*Flux.* Four parts minium, and one part flint powder, melted together and pulverized.

57. Cut one part of pure thin-beaten silver in pieces, and break one part raw antimony and one part of lump sulphur to powder. Cover the bottom of a crucible with these two last-mentioned substances, lay upon them a piece of the silver leaf, and repeat the operation till all is laid in. Place now the crucible in red-hot charcoal, and cover it with one piece of the same. As soon as the sulphur begins to burn, the mass is in fusion. It must then be thrown into clear water, dried, mixed with three parts of dark-burnt ochre, and pounded perfectly fine.

The pigment may be used without the addition of *flux or gum*, and laid, to the thickness of the

back of a knife, on the reverse side of the glass. The superfluous quantity may be brushed off after burning.

58. For a light yellow, proceed as in the former case, only using one part of ochre instead of three.

The portion of the yellow colour described in the last article, which may remain after the burning, may be used again for colouring matter.

59. The peculiar yellow of the ancient artists is obtained by the following process:

Melt two parts of good sulphuret of antimony with one part of silver tolerably free from copper; stir the mass together and pour it in a metallic mortar, pulverize the resulting sulphuret of antimony and silver, when cold, in the same mortar, and preserve it in a stopped phial. From this one part is to be taken, levigated with water on a copper table to the finest consistence, and mixed with four to seven parts of yellow ochre, twice heated to redness and washed in water, according to the proposed lighter or darker shade of the colour. Lay on as in No. 57.

60. Chloride of silver, and three times its weight of burnt ferruginous clay (burnt clay out of a baking oven, previously pulverized and sifted), are to be levigated with water, and laid on as in Art. 57.

61. One part sulphuret of silver, one part glass of antimony, and one part burnt ochre, ground as

fine as possible and treated in the foregoing manner.

62. For orange, dissolve pure silver in pure nitric acid, and precipitate it by hanging a piece of polished tin or copper plate in the solution. The flocculent precipitate is to be gathered together, washed in warm water, and ground fine.

One part of this to be mixed with one to two parts of the red colour, No. 37.

63. One part of silver in powder, precipitated from the solution of nitrate by a piece of thin copper, must be washed in warm water, ground with one part red and one part yellow oxide of iron, and laid on as in No. 57.

### VI. GREEN.—FUSED COLOURS.

64. One part green carbonate of copper, prepared by precipitating it from a solution of copper in nitric acid with carbonate of potash, and afterwards properly washing and drying the precipitate; four parts powdered white glass, and two parts minium, must be well mixed in a porcelain mortar, and exposed to a very strong fire in a glazed crucible, until threads drawn out appear perfectly clear. It must then be taken out of the crucible with a hook, thrown into water, dried and pulverized.

65. Four parts oxide of copper, one part of antimonic acid, or antimoniate of potash, and six *parts flux* (composed of six parts sand, four parts

yellow oxide of lead, one part borax glass, and one part nitre), to be melted together and ground fine.

66. One part copper precipitate, (obtained by dissolving sulphate of copper in eight times its weight of boiling water, and precipitating the copper by keeping a piece of polished iron in the solution for twenty-four hours, washing the precipitate with hot water and drying it,) four parts pulverized white glass, and two parts minium, treated as in No. 64.

67. One part oxide of copper, ten parts antimoniate of potash, melted with thirty parts flux (viz. one part sand and three parts minium).

68. One part borate of copper, (obtained by dissolving pure sulphate of copper in water, and precipitating it with a solution of borate of soda, washing and drying the precipitate,) three parts white powdered glass, and one part minium, mixed and treated as in No. 64.

### MIXED COLOURS.

69. Dissolve three parts pure oxide of cobalt in nitric acid, and two parts tin chippings in muriatic acid; both solutions are then to be thrown together into one glass, and precipitated with carbonate of potash. The precipitate must be collected on blotting paper, washed, dried, put in a muffle on a porcelain pot, and exposed for about

eight hours to a yellow heat, being frequently stirred in the mean time. When cold, one part of this green is to be mixed with four parts flux.

*Flux.* One part sand, two parts litharge, and one part borax glass.

70. Equal parts of chromate of potash, and sulphur, are to be mixed and melted together in a covered crucible. As soon as the mass flows quietly, it is to be poured off and freed from the liver of sulphur which will have formed, by well washing with boiling water, when the oxide remains as a beautiful green pigment. This is to be collected on a filter, dried and ground fine. One part of it may be mixed for use with three parts flux, laid on and burnt in.*

*Flux.* Four parts minium and one part flint powder, melted together to a perfectly transparent glass.

71. One part of pure yellow chromate of potash ground together with three parts fine powdered quartz, laid on and burnt in.

72. One part black oxide of manganese, and two parts cobalt or king's blue, mixed together and ground fine.

73. Two parts pure oxide of cobalt, ground with one part flux.

*Flux.* One drachm white sand, and two drachms litharge.

* There is a misplacement of words in the original here, which *creates some* confusion.

Nos. 72 and 73 serve for green distances.

### VII. VIOLET.—FUSED COLOURS.

74. Calcine best oxide of manganese in a potter's kiln with an equal quantity of saltpetre; take one part of this, six parts white glass in powder, and two parts minium; mix and treat in the manner already explained, with the strongest melting fire.

75. One part calcined oxide of manganese, one part zaffre, ten parts white glass powder, and four parts minium, treated as before.

### MIXED COLOURS.

76. Gold purple mixed with chloride of silver, in varying proportions as practice will direct. The latter must previously have been melted with ten times its weight of flux, prepared from three parts white quartz, washed and calcined, five parts calcined borax, and one part minium. The gold purple is to be mixed with this, and the whole ground together.

The gold purple may be precipitated in combination with the chloride of silver by the following process. Drop into a large quantity of water, first some solution of tin, then a little nitrate of silver, and lastly the gold solution, constantly stirring the mixture. The proper proportionate quantities of the three solutions must be ascertained by experiment. The precipitate must be

mixed with about an equal quantity, or rather more, of the flux.

*Flux.* Eight parts sand, four parts borax glass, one part nitre, and one part white chalk, treated as in No. 31.

77. Gold purple ground together with three parts blue colour, and oxide of cobalt or king's smalt. This mixture gives the most beautiful violet colour, which may be made to assume different shades according to the greater or less quantity of purple, and the lighter or darker blue used.

78. One part purple, and six parts flux, ground together, give dark violet.

*Flux.* One part sand, two parts litharge, and one-fourth of a part borax glass.

79. Mix pure gold purple after precipitation and washing, but without previously drying it, with some flux.

*Flux.* One part silicious sand, washed and calcined, and three parts minium, treated as in No. 31.

### VIII. BROWN.—FUSED COLOURS.

80. One part oxide of manganese, and eight parts flux (from one drachm of sand, and three drachms of litharge melted together), pounded and ground fine.

81. One part oxide of manganese, one-fourth

part blue of No. 52, and eight parts of the foregoing flux, used in the same way.

82. Two parts gold yellow of No. 57, one part antimony, and three parts flux (prepared from one part sand, two parts lead, and one-fourth part borax, melted together), powdered and ground fine.

### MIXED COLOURS.

83. Red oxide of iron, prepared by precipitation with carbonate of potash from pure sulphate of iron, and afterwards heating the precipitate to redness until it becomes a lively red colour.

*Flux.* A quantity of lead glass equal to that of the oxide, and some gum water, ground on a glass table.

84. Two parts oxide of iron, three parts oxide of manganese, and three parts gold yellow of No. 57, melted together, poured into water, and when cold, mixed with three parts flux.

*Flux.* One part sand, two parts litharge, and one-fourth part borax glass.

85. Red oxide of iron (hematite, red chalk, or natural iron rust), with oxide of manganese, or a small portion of sulphuret of antimony and silver, or some oxide of silver, treated as in No. 83, serve the same purpose.

86. Or, the sediment left in the preparation of the red colour may be laid on the glass without further preparation.

87. Lastly, seven parts gold yellow of No. 57, ground with one part oxide of manganese, without melting or adding any flux.

(No. 81 gives sepia; 82, a yellow-brown.)

## GENERAL REMARKS UPON THE PREPARATION OF THE PIGMENTS AND FLUXES.

88. As an essential addition to the foregoing, we may here give some few general directions respecting the preparation and combination of the pigments and fluxes, which could not well be inserted in the recipes themselves.

It is impossible to give any absolute or positive instructions for the proportionate quantities of the ingredients used in the pigments or fluxes. The determination of these must in a great measure be left to the trials and experience of the artist.

The same will apply also to the proportionate quantity of the flux to be used with the pigment, and to the quality of the flux also.

89. The materials of the colours, as well as of the fluxes, must be as good and as free from foreign ingredients as they can be obtained; otherwise disadvantageous consequences for the beauty and durability of the painting are to be feared.

90. When pigments, or fluxes, or both, are to be melted together, this must be done in strong Hessian crucibles, which are to be protected from

the action of the melting mass by covering them internally with a mixture of chalk in water. Or they may be glazed, which especially prevents the penetration of fused colours containing oxide of lead. To effect this latter object, the crucible is to be rinsed out with water, then covered on the inside with pulverized white glass, placed in the fire, and heated until the glaze adheres perfectly to its sides.

91. For the operation of fusion in Hessian crucibles, it is necessary to use an ordinary wind or air furnace, furnished with a dome or cover having a draught-pipe. The inside is to be covered everywhere with fire-clay, to a thickness of three inches, and in the cover must be a door, or at least an opening, filled up with a clay stopper, by which the interior may be accessible, in order to lift off the cover of the crucible and to stir its contents with a polished glass rod. Upon the grate of this furnace must be laid a pot of clay, and upon this the crucible, which must be covered with an earthenware lid.* It may then be surrounded with wood charcoal.

92. The ingredients of the pigments which are to be fused must previously, unless particularly directed otherwise, be ground to the finest powder on a thick glass plate with a glass muller, or, where specially indicated, upon a copper table with a steel muller, and not generally upon marble,

* Thonscherben,—literally, a pot of clay.

porcelain, or substances containing lime, for these, by the process of rubbing, are liable to give off a portion of their material. The ingredients must be intimately mixed: the crucible is first (unless otherwise specified) to be brought to a red heat gradually, and the mixture then placed in it, but never in greater quantity than will three parts fill it.

In like manner must the ingredients of the flux be treated, and also those of the pigments and fluxes which have to be melted together to form a fused colour, provided that nothing appear in the recipes to render another mode of treatment necessary for the particular case.

The crucible must then, as a general rule, be kept some time at a moderate red heat, which is afterwards to be increased till the mass is perfectly melted and runs freely, and till threads drawn from it with a polished steel rod appear pure and clear. It must then be poured into a dish of cold pure water, afterwards dried, pulverized, and treated according to the special directions.

93. The pigments and fluxes thus prepared are to be tested in the following manner. Place a spacious crucible in a furnace in an inclined position, and put in this strips of the same kind of glass which it is proposed to paint on, streaked with the colours which are to be used. These are to be exposed to a lively red heat in the crucible

until they become weak and begin to bend, when they must be laid to cool on the top of the furnace or in the ash-pit, and afterwards examined.

Should the edges of the painted parts appear as if the colours had overrun their bounds, this is a sign of the super-saturation of the pigment with flux, and the latter must accordingly be reduced in quantity till the appearance is removed; otherwise the whole success of a glass-painting might be destroyed, for such easily fusible colours are apt to blend together when laid near each other.

On the other hand, the dull appearance and rough feel of the colours betray a deficiency of flux, which must therefore be added in greater quantity.

94. The various shades and transitions of the principal colours may be obtained, not only by the directions as to the materials and treatment given in the special recipes, but in more frequent cases and much more comprehensively, by certain manipulations which will be hereafter mentioned in the description of the manner of laying the pigments on the glass.

95. Independently of the fluxes named in the foregoing recipes for each special pigment, there are others which may serve for every colour, or at the most require a trifling variation in the peculiar proportions of the quantities of their ingredients. These proportions depend principally upon the greater or less fusibility of the pigment, and will

be easily discovered by the practised artist. Such a flux, for example, is four parts minium and one part powdered silica; the latter obtained from the purest flint, free from calcareous specks, by heating it to redness three or four times in a crucible, throwing it every time into water, and afterwards pounding it in a mortar * and sifting it through a fine sieve. This powder is to be mixed as intimately as possible with the minium, melted in a covered crucible, stirring the mass frequently with a glass rod, until it is transformed into a perfectly transparent yellow glass, the silica being entirely dissolved, and threads, drawn by way of test from the mass, being perfectly clear. It is then to be pressed out in water, dried and powdered, sifted through a fine sieve, and kept in closed bottles.

Or one part rock crystal is to be pounded and melted by a strong fire, with one part of well-fused borax glass, and treated, when it shows the before-named signs of perfect fusion, in the foregoing manner.

Or one part powdered white glass and two parts minium may be prepared in the same way.

96. Besides the implements already named, the following are necessary for the manipulation of the processes for preparing the pigments and fluxes; namely,—coal-shovels, fire-hooks, crucible tongs, hooks of polished iron for drawing the

* A porcelain mortar is mentioned, but this must be an oversight. See Art. 92.

melted masses out of the crucibles, mortars of iron and porcelain, colour dishes, &c. of the same material or glass, spatulæ of iron and wood, and other things which can always be obtained without much trouble or expense, or indeed may be supplied from common household utensils.

In the absence of a proper wind furnace, a common round stove, like those used for warming the German apartments, may easily be adapted to the purpose.

97. All vessels which come into immediate contact with the pigments or fluxes, especially those used for their preservation, mixing, fusion, &c., must be kept as clean as possible, and carefully freed from all refuse after every time of using, lest by an accidental mixing of heterogeneous ingredients the fruit of the labour should be lost. Great caution is especially necessary in employing crucibles which have been used before.

## CHAPTER II.

### OF THE PROCESS OF LAYING THE COLOURS ON THE GLASS.

98. The manipulation of the process of laying the colours on the glass varies, in some measure, according to the different kinds of glass-painting, which therefore call for the first explanation.

Either the colours may be laid upon a single sheet of glass, upon which the whole figure with all its principal colours and intermediate tints are burned in (Peinture en apprêt); or,

The figure may be composed of various pieces of *pot metal* (glass already coloured in its manufacture), and only the outlines and shadows painted on, the glass pieces giving the colours for the peculiar places where they are inserted (Mosaic glass painting); or,

Both these methods may be combined in one and the same picture, by composing it

partly of pieces of coloured *pot metal* and partly of white and painted glass, fixed together.

### PEINTURE EN APPRET.

99. For painting on a single sheet of glass, the following rules must be observed.

A pure white glass must be chosen for the purpose, free from air specks or bubbles, and especially difficult of fusion, as the whole labour would be lost if it were attempted to burn in the colours upon a ground which fused as easily as themselves. It is practicable, as the examples of the ancients show, to paint on what would appear the commonest glass with a good result, provided that it does not contain too much lead, and thereby become too easily fusible.

Before the operation of painting, the glass plate must be rubbed to a sufficient extent with pure lime, slaked by exposure to the air, in order to clean it perfectly.

100. The ground or foundation must then be laid over the whole surface of the plate, which may be done in two different ways. Some artists simply dip a piece of clean linen cloth or a flat camel-hair pencil in oil of turpentine, and brush the pane of glass with it equally over its surface; while others give to the whole a thin clear ground of black glass-painting colour, in such manner as

not to destroy its transparency, but at most to give it the appearance of a dead ground glass. Both methods answer the purpose of covering the glass with a viscous surface, which takes the design and the colours better than a polished ground; the latter prepares the glass at the same time for the painting effects which are to be obtained upon it.

In both cases the ground which has been laid on must be most carefully levelled over and brought to as thin a coat as possible with a large hair pencil, and must be dried quickly, taking great care to preserve it from dust, &c.

101. Painting on one sheet requires only one pattern drawing or cartoon, which, however, may be used in two ways.

Either the glass sheet, grounded and dried as above directed, may be laid upon the drawing, and the outlines, as seen through the glass, traced lightly with a fine pencil, and with black or other glass colour corresponding to the ground;

Or the drawing may be placed reversed on the sheet, and all the outlines marked over with a steel or ivory style. If this latter method is used upon a ground of simple turpentine, the back of the drawing must previously be rubbed over with black-lead, so that the traced lines may appear dark on the light ground.

In both cases, the drawing, whether it is placed upon or under the glass, must, for the sake of

convenience, be fastened to it with pieces of wax at the four corners.

102. For properly carrying out the process of laying on the colours, a desk or easel is necessary, which should be capable of being placed in an inclined position by means of props, and should be formed by fixing a glass plate in a wooden frame, so that the light may pass through the painting. Sometimes during the progress of the work, the glass which is being painted may be removed from the easel and laid upon a sheet of white paper, in order better to show the effect of certain colours.

103. The vehicle with which the pigments are laid on is generally oil. Some artists use exclusively water, but this alone is an insufficient medium for binding the metallic bodies to the glass, particularly if, as in the case of fused colours, they are somewhat coarse in their nature, and require to be laid on in thick layers. They then easily loosen from the plate before the firing, and render the process of laying on much more difficult. It is an important advantage, that with oil the edges are more sharply defined, and the parts already painted may be again touched over when dry without danger of loosening the ground.

It must be understood that when it is wished to make use of water, the plate must either not be grounded at all, or only with a glass-painting colour worked up with water.

The most suitable kind of oil for the purpose is rectified oil of turpentine, somewhat thickened by standing, and to which a little oil of lavender is added. This preparation gives the mass the necessary degree of viscosity, and also prevents the colour on the palette from drying up and thickening too quickly.

The palette should be of thick sheet glass, ground rough by rubbing with a glass muller and fine sand.

104. Preparatory to mixing with oil for laying on, those colours which require a flux must (unless a different process is specially indicated) be ground fine in water with the flux, and again dried. But the fused colours, *i. e.* those in which the oxide has already been vitrified with the flux into the state of a transparent glass, should, for the purpose of laying on, only be coarsely granulated; for the finer these are ground, the more likely is their transparency and perfection to be impaired when burnt in.

Those pigments which are laid on in their simple combination with an earthy vehicle, and without flux, as, for example, the yellow and red colours prepared from silver, form an absolute exception to the use of oil, and must, for laying on, be stirred up with water to the consistence of a thick cream.

The first of these three kinds of pigments should, as a general rule, be laid on in a thin, the

two latter in a pasty, state. The depth of tone of the colour depends, with all three, upon the degree of thickness in which the pigments are laid upon the glass.

The laying on of the fused colours is accompanied with more difficulty than that of the other kinds. The latter are simply laid on with the pencil, in the same manner as with other kinds of painting, and the only care necessary is that the coat may be perfectly equal and regular, wherefore for large surfaces a wide smooth pencil or driver is usually employed. The colours prepared from silver must be treated differently, and laid on the glass at least to the thickness of the back of a knife.

But the fused colours must be brought upon the surfaces to be covered in the state of a thick flowing mass, moist enough to run, but consistent enough to lie upon the glass. For this purpose small portions must be laid on and spread out with a pencil or small spoon, and made to flow to the circumscribing outlines, by inclining the sheet in the proper directions. If any part of the surface thus covered is required to take a darker tone of colour, the plate must be kept for some time at an inclination in the corresponding direction, so that the colour may thus accumulate thicker on that part. By this process many gradations of tone may be obtained from one and the same pigment.

105. The remaining rules for the laying on of the pigments are those which principally result from the different methods of painting on one sheet, of which there are principally three.

Either the whole picture may be brought out in its outlines and shadows, on one side of the sheet, with black, brown, or gray colour, and illuminated with the proper colours in the proper places on the other side;

Or simply the manner of ordinary oil-painting may be adopted with the glass colours, and the picture treated as by an artist in oil;

Or, as is now most customary, both methods may be united, the artist making use of each in certain places, according to the requirements of the object he has in view.

For these three methods the following common rules will serve.

106. The shadows and dark-coloured outlines, and that which is called in oil 'under-painting,' should be drawn on the front side of the glass, or that which is turned towards the spectator.

The illuminating colours, especially the principal ones, should be laid on the back or reversed side.

Intermediate tints, and gradations by shading, should generally be placed on the front side, but sometimes, when they alternate with each other, necessarily must lie on both; as they cannot be

put in contact on one and the same side without danger of running into each other and making a false colour.

The silver yellow and red colours, before alluded to, must always be placed on the back or reverse side.

In some particular cases colours may be laid on corresponding places on both sides of the glass, in order to produce certain effects by the light falling through the two together. Thus, purple on one side and gold yellow on the other give a magnificent fiery scarlet; blue and yellow, according to their respective intensities, give different shades of green; the latter, again, with blue on the opposite side, serve for excellent distance colours. And finally, by the mixture of several colours, the most diversified intermediate tints may be obtained, so that glass-painting in its present state may be brought to assimilate with oil-painting in its power of producing varied effects.

107. In order to put a new tone of colour on a surface already marked with outlines, &c., it must first be dried by a gentle and equal heat (to avoid the warping of the glass), and again painted immediately after it has cooled. Or the black lines first laid on may be at once burnt in, and, where possible, with these any yellow shades also which may be required, after which the painting, then fixed, may be further worked upon without danger of damage. The residuum of the unfluxed yellow

colour may be removed after burning, and again used. This colour must never be put over any other, nor over dark shadows, unless these are previously burnt in, but always requires a carefully cleaned surface of glass to lie upon; otherwise it would combine with the flux of the under colour, whereby the earthy residuum would be fixed, and the transparency and beauty of the whole destroyed.

108. All pigments must be laid on somewhat darker than in other kinds of painting, as they lose in depth by burning.

When a pigment has overrun its outline, the superfluous quantity must be removed, when dry, with a knife.

By taking away the ground with a style of fine grained wood, pointed in front and smooth at the back (a tool used in etching), the most effective lights may be obtained.

Should the colours not appear quite dull and dry, but shining and greasy, after the drying of the picture, this is caused by the misuse of the oil, which is always dangerous to the beauty of the pigments in firing.

It is neither necessary nor advisable to allow more than one day for the drying of the colours; the burning in should be proceeded with at the expiration of the time named.

Lastly, during the work, the greatest cleanliness must be observed throughout, the pencil

and palette must be kept perfectly clean, and the painting preserved from dust, &c., for which reason it is not advisable to paint in a laboratory or melting-room, where the presence of vapour, dust, and impurities of many kinds cannot be avoided.

### MOSAIC GLASS-PAINTING.

109. The before-mentioned rules for laying on the colours will apply also to the method of forming designs with coloured pieces of pot metal, or partly with these and partly with painted white glass. It remains to say something more in reference to the employment of the cartoons, and the cutting and arrangement of the glasses in this branch of the art, which, however, is but little practised, since the leaden bars in a picture calculated for a near view are detrimental to the effect.

Mosaic glass-painting requires two cartoons. One of these, a finished and coloured one, is used by the artist as a pattern, and serves to determine the arrangement of the pieces of glass according to their several colours, and the manner of introducing the leaden ribs to fasten them together, according to the outlines of the figures. Each piece of glass proposed to make part of the picture must be distinguished by a separate number.

The other cartoon, which consists only of the black outlines of the lead jointing, and whose

several parts are numbered to correspond with the first, is to be cut up in pieces according to the outlines, and the size of each piece diminished all round by one-half the thickness of the lead bar of the jointing, so that the pieces of glass may be exactly cut to the proper dimensions.

The cutting of the glass may either be done by the diamond, or by tracing the line of division with a red-hot iron, after having made a small incision at its commencement, or by cutting with scissors under water, which, however, is not a safe process.

110. With overlaid glass, *i. e.* pot metal of two several sheets or layers laid upon each other from the frit, as for example, red and white, blue and white, &c., it is possible to produce many effects of shading by removing more or less of the coloured glass sheet, according to the outline, by grinding with emery. Or the coloured sheet may be ground through to the white glass, and thus coloured ornaments may be given on white ground, especially for the representation of damasked materials. Also, the white parts thus exposed may have a colour given them at pleasure on the opposite side, in order to produce many kinds of effects, or to avoid the necessity of using many pieces when the introduction of another colour in that of the pot metal is indispensable for the effect required.

The coloured pot metal may be painted with

intermediate tints of its own principal colour, or even, in order to produce certain effects, may be covered on one of its surfaces with another colour. Thus, a fiery red may be obtained by covering a red overlaid glass on its white surface with the yellow silver colour, and burning it in, or a shade of green by a similar use of the same pigment on a blue overlaid glass. In these operations the widest latitude is left to the talent and practice of the artist.

## CHAPTER III.

### OF THE PROCESS OF FIRING, OR BURNING IN OF THE COLOURS; AND THE CONSTRUCTION OF THE KILN.

111. THE object kept constantly in view in the foregoing explanation of the processes of glass-painting, has been to bring the practice of this art into the reach of as many hands as possible; and therefore it has been especially endeavoured to point out, not only the most suitable, but also the shortest and easiest methods of operation, in order to show that the processes are much less costly and complicated than generally supposed, and to put the reader as much as possible in the position of being able to construct for himself the requisite apparatus.

This principle has been particularly adhered to, in the following description of the process of firing, and the construction of the necessary kiln; for it will be shown that the operation may be performed in any common kitchen, and that an ordinary fire-place may, with the aid of some fire-bricks, tiles, and iron rods, be made to suffice for the con-

struction of a furnace which shall answer perfectly the purpose intended.

The remaining necessary implements consist of a muffle, an iron charcoal-shovel, a pair of fire-tongs, tongs to extract the trial pieces, and a pot in which to dry the charcoal.

112. The muffle, if it cannot be obtained of cast iron or plumbago, may be made of burnt earthenware, and its size may be regulated according to circumstances. If of the latter material, it must, in order to stand fire well, be constructed of a mixture of two parts fire-clay and one part fine sand, and should be of an oblong four-cornered figure; for example, twelve inches long, ten inches wide, and five inches high. It must, however, be large enough to receive the largest of the sheets to be burnt, without their edges coming in contact with the sides of the muffle.

In the middle of one of the short sides there should be an opening five inches long and a quarter of an inch wide, for extracting the test pieces. The muffle is to be closed with a cover of the same material, having two round holes of about one inch and a half diameter, running out into two tubes about two inches and a half long.

113. To receive the muffle, a four-cornered kiln is to be built, whose interior dimensions should be four inches longer, and as much wider, than the muffle which is to be placed therein.

For this purpose fire-bricks are simply to be laid upon each other, but in such a manner that the wall turned towards the operator may contain an opening three inches high from the bottom and twelve inches wide, for the management of the firing. When it has reached the height of four inches all round, a perfectly horizontal bearing frame is to be formed by laying a pair of iron rods upon the long sides. Upon these the muffle is to be placed, in such manner that the test opening is turned towards the operator.

After the painted glass sheets are laid in the muffle, the walls of the kiln are to be built to such a height as to reach one inch above the tubes of the cover; in doing which, however, another opening three inches and a half wide and two inches high, corresponding to the test opening of the muffle, must again be left in the front wall, or that turned towards the operator.

Both openings of this wall of the muffle must be capable of being closed; the lower one, that of the ash-pit, with a stopper of iron plate filled with clay; the upper one, or the one corresponding to the test opening, with a stone. Each of these stoppers must fit exactly, and be of the same thickness as the wall.

114. The painted glass intended for firing must be laid in the muffle in the following manner. Sprinkle first of all well-burnt lime with water,

and dry it again, when slaked over the fire. Sift this powder through a coarse hair sieve, so as to cover the bottom of the muffle to the thickness of one inch. Carefully level over this layer (since otherwise the glass might become crooked in burning), and lay the sheets upon it near each other, but not so close as to come in contact either with each other or with the walls of the muffle. Then sift another thin layer of lime over them; lay a second set of the pieces of painted glass on the lime, and continue in this manner up to the middle of the muffle, where the opening is made for drawing out the tests. These consist of strips of glass about six or seven inches long and one inch wide, streaked with patterns of the colours which are to be burnt in. They are to be laid in the muffle like the sheets of painted glass, upon a layer of lime, and covered with it in the same manner; and they must be so placed that one end may reach to the middle of the muffle, while the other end projects half an inch out of the test opening before described, in order that they may be laid hold of with the tongs, and drawn out for examination.

After these are placed, the sheets of the painted glass and the layers of lime are to be alternated, as before, until all the glass is placed in, or until the muffle is full. If only one sheet is to be fired, the muffle must be filled with common instead of painted glass, as above directed, and the single

sheet to be operated upon must form one of the middle layers. After this the muffle must be closed in.

115. In the two tubes of the cover are to be placed pieces of the same kind of glass as is used to paint upon, five or six inches long and one inch wide; these may be called *watchers;* they are to be placed vertically, and in such a manner that their lower ends may stand on the sheet of lime next under the cover, and their upper ends may project about two inches out of the tubes.

After this, and after the test opening of the front wall is closed with its stopper, the firing may be commenced by strewing glowing charcoal over the hearth of the kiln and to some little distance up the sides, then filling all the interstices between the muffle and the walls of the kiln with charcoal up to the height of the muffle, and afterwards covering the latter in such manner that the *watchers* may project in sight. The whole of the fuel will then soon catch fire.

Proceed to lay across the walls of the kiln some iron bars, and upon these some fire-tiles, so as to cover the kiln as far as an opening in the centre, not quite one foot diameter.

It is here to be remarked, that when the muffle is new, or has not been employed for some time before, it will be safer to heat it to redness *previously to* using, which is to be done in the above-

described manner, exactly as if it contained glass, increasing the fire to a white heat, and allowing the muffle to cool of itself after the fire is removed. When it is quite cold, it may be used with safety.

It is particularly necessary to take care that the heat of the kiln during the process is raised equally on all sides of the muffle; and the fire must also be retained at a uniform glow by the continued addition of fresh fuel.

116. When the muffle reaches a dull red heat, when the *watchers* bend, and when the colours appear clear and perfectly fused upon the test strips (which must have been drawn out and laid upon the top of the kiln to cool slowly), all which customarily takes place about the sixth or seventh hour of the burning, the fire is to be removed by the hearth opening of the kiln, as quickly as possible, but yet with care not to shake or disturb the muffle; all the openings of the kiln must be stopped and luted, and the whole left to cool gradually, which will require between twenty-four and thirty-six hours.

The spare charcoal may be thrown into a pot of water and used again.

After the cooling, the glass sheets are to be taken out of the muffle, cleaned with a brush and lukewarm water, and carefully dried.

117. Should any parts require further painting, and consequently another firing, the pigments

must be mixed the second time with a greater quantity of flux, in order to render them more fusible than those previously burnt in.

Also, the heat of the second burning should be less than that used the first time.

## CHAPTER IV.

### OF THE OPERATION OF FIXING TOGETHER OR LEADING MOSAIC GLASS.

118. This process is most customarily and properly left to the glazier, who also ought to cut out the pieces of glass. In order, however, to leave nothing wanting for those amateurs who may wish to make the whole of a specimen of the art their own, the following rules may be useful.

Common window lead of the glaziers, but of very small dimensions, is to be laid round one of the middle pieces forming the glass-painting, so as to hold it in the groove of one of its sides, while, in that of its other side, another piece is to be inserted. Continue this, constantly under the guidance of the cartoon, upon which the work may be laid, and working always from the centre of the picture outwards, soldering the several pieces of lead together during the process, by their ends of contact, which may be interlaid in the grooves at the corners where they join.

For this the soft or tin solder (consisting of tin

having so much lead melted with it that when bent it does but slightly crackle—commonly one part lead and three or four parts tin) is required, and a common glazier's soldering iron with a copper point should be used for applying it. After this is heated in a charcoal fire, it is to be rubbed in powdered sal-ammoniac and resin, and then on a piece of the solder, a portion of which will adhere to the copper and may be carried to the leaden bars. When the soldering is executed, it will be well to touch over the junctures with dark oil colour, or still better with dilute sulphuric acid, in order to remove the bright metallic lustre, which might otherwise damage the effect of the painting.

# APPENDIX.

## *On the General Nature of Enamel-Painting.*

ENAMEL-PAINTING differs from all other kinds in the vehicle employed for the colours, that is, to hold the parts together, and bind them to the ground they are laid upon. This is glass or some vitreous body, which, being mixed with the colours, and fused, or melted, by means of heat, becomes fluid; and having incorporated with the colours in that state, forms, together with them, a hard mass when cold. It answers, therefore, the same end in this, as oil, gum-water, size, or varnish, in the other kinds of painting.

The glass or vitreous body applied to this purpose of mixing with the colours, in order to bind them to the grounds, is called a flux, and makes one principal class of the substances used in enamel-painting. When this flux is easily fusible, that is to say, melts with a less degree of heat, it is, in the style of those who work in enamel, said to be *soft;* and when it is reluctant to melt, and requires a greater degree of heat, it is called *hard.* These terms are as well applied to the matter of

the enamel grounds, and all other vitreous substances concerned, as to the fluxes. It is, in general, a perfection of the flux to be soft, or run easily into fusion. But the great point, with respect to this particular, is, that when several mixtures of colours and fluxes are used at the same time, they should all correspond to each other in the degree of this quality; otherwise some would be rendered too fluid, and perhaps run the matter of the enamel ground into fusion, and mix with it, while others remained solid and insufficiently fused themselves. It is always necessary, likewise, that the enamel of the ground should be considerably harder than the mixtures for the colours; for if they both melt with the same degree of heat, they will necessarily run together.

It being requisite that the body painted in enamel should undergo a heat sufficient to melt soft glass, the matter of such body can only be gold, silver, copper, porcelain, or China-ware, hard glass, and earthenware. And where the metals are used, if the painting be of the nature of a picture, or demand a variety of colours, it is necessary that a ground of white, or some other colour, should be laid on the metal; the body of which ground must necessarily be of the same vitreous nature as the flux, but harder; as nothing else can endure so great a heat that is capable of incorporating with, and binding the matter of the white, or other colour, to the surface of the metal. The grounds, therefore, make another principal class of the substances used in enamel-painting.

The third class is the colours, which must likewise be bodies capable of suffering the heat of melted glass; and such as will either themselves be converted into glass, or kindly incorporate with it in a melted state. This of course confines the matter of such colours to metals, earths, or other mineral bodies; all vegetable and animal substances being calcined and analyzed with a greatly less degree of heat than the lowest sufficient to work enamel.

The fourth kind of substance is called the secondary vehicle; which is, some fluid body for laying on the ground, and working, with the pencil, the flux and colours when mixed together; since, as they form only a dry powder, they could not be used as paint without some such medium. But as this is to serve only for spreading and laying on the matter of the enamel, and not, like other vehicles, to assist in holding the colours together, and binding them to the ground (that being in this kind of painting the office of the flux), it is necessary that it should be some such substance as will evaporate and dry away without leaving any part behind: it would otherwise be heterogeneous matter with regard to the enamel, and consequently injurious to it. Essential oils have been, therefore, used for this purpose, as they have the quality of wholly drying away on the first approach of heat, together with a slight unctuosity, which renders them capable of making the matter of the enamel work properly with the pencil.

## *On the Art of Gilding Enamel and Glass by Burning.*

THERE are two methods of gilding enamel and glass, by burning or annealing: the one is the producing a cohesion of the gold with the glass or enamel by the intermediation of a flux; the other, by producing the like effect without any. But the principle is the same, nevertheless, in both; and is, in fact, no other than the causing the gold to adhere to the enamel or glass, in consequence of the fusion or approach to that state, either of the flux used, or the body of enamel or glass itself; by which the gold is cemented to such body.

The flux, when any is used, may be either simple glass of borax, or any of the preparations of fluxes powdered.

There are other differences likewise in the manner of this gilding, which respect the state of the gold; for it may be either used in the form of leaf gold, or in that of powder, either mechanically made, or by precipitation.

When leaf gold is employed for gilding enamel or glass in this way, without any flux, the enamel or glass may be moistened with a very weak solution of gum-arabic, and again dried. Being so prepared, it should be breathed upon till it becomes a little adhesive or sticky, and then it should be laid upon a leaf of gold; and if that be not sufficient to cover it, the remaining part must

be laid on others, and the work again breathed upon, if it appear dry before the whole surface be gilded. When the gold is thus united to the enamel or glass, by the cementing quality of the gum-arabic, which is used in order to keep it close and even to the body to be gilded, the work is ready for burning.

If the leaf gold be used for gilding enamel or glass with the aid of any flux, such flux, being finely levigated, should be tempered with a very weak solution of gum-arabic, and very thinly spread on the part of the work to be gilded; and when the gum-water is nearly dry, the leaf gold should be laid on the part thus prepared for it; or if the work be kept beyond the time, it must be breathed upon till it becomes sticky: the gold thus fixed on the work, it is in a state proper for burning.

The advantage in omitting to use any flux is the rendering the gold less prominent and uneven, with respect to the body gilded; which is in some cases material. But unless the ground, whether of enamel or glass, be very soft, it requires a strong heat to make the gold take hold of it; and this, in the case of enamel, endangers the ground, or any painting upon it; for if the degree of heat be not very nicely adjusted, the glass or enamel will run into too liquid a state in some instances, and in others not be softened sufficiently to cohere with the gold. The advantage of using a flux lies in avoiding both these inconveniences; and, particularly in the case of very

hard glass, the being certain that the gold will cake; which is, without this medium, sometimes dubious. But the flux lying under the gold prevents it necessarily from being so level with the surface, or having the same evenness, as when laid on the body itself without any intermedium.

Before we speak of the method of using the gold in powder for gilding in this way, it is proper to mention the manner of preparing this powder; which may be best made in the following manner: Take any quantity of gold, and dissolve it in aqua regia thus: To 8 ounces of pure spirit of nitre add 2 ounces of sal-ammoniac, scraped perfectly clean, and powdered, which will convert the spirit of nitre to aqua regia. Dissolve, in 4 ounces of this aqua regia, put into a proper phial, half an ounce of purified gold, in the state it is to be had of the refiners, under the name of grain gold. In order to hasten this solution, the phial may be put into a gentle heat, where it must continue till the gold entirely disappears. Take, in the mean time, about the same quantity of aqua regia in another phial, and put into it filings or small bits of pure block-tin, so long as any brisk effervescence arises on the adding fresh quantities: but this must be done gradually, especially if the filings be used; otherwise the mixture will heat so much as to boil over, or break the phial. Drop then thirty or forty drops of the solution of the gold into a half-pint glass of water, and immediately after about fifteen or twenty drops of the solution of tin. The gold will be then precipitated in a red powder from the

solution in the aqua regia dropped into the water; and this operation must be repeated till the whole quantity of the solution is thus treated. When the last quantity of the red powder has been precipitated, pour off the clear fluid, and fill the glass with spring water; which, when the red powder has settled, must be poured off likewise. Hold then a sponge wet, but well squeezed, to the surface of the fluid remaining with the powder; and, when as much of the water as can be conveniently separated from it by that means, is drawn off, lay the powder on a marble or porphyry stone to dry, taking great care that it contracts no dust or foulness. When dissolved, make a precipitation of the gold, by putting into the solution slips of copper plate, which must be continued there till they no longer produce any effervescence in the fluid. These slips of copper being then taken out, and the gold adhering to them gently beaten off, the fluid must be poured off from the precipitate, and fresh water put in its place, which must be renewed, in like manner, several times, till the salt formed by the copper and aqua regia is entirely washed from the gold; which, being dried, will be ready for use.

The precipitation may otherwise be made by adding a solution of Roman vitriol, or of copperas, or common green vitriol, to the solution of gold, in the following manner: Take a solution of gold in aqua regia, prepared as above directed; and add to it gradually a solution of green vitriol or copperas in water, until no further precipitation

of the gold is made by the addition of a fresh quantity. The solution of the copperas may be made by putting one drachm of it powdered into an ounce of water, and shaking them till they appear to be dissolved; after which the solution must stand, and the clear part be poured off from the sediment, if any be found. The fluid must be poured off from the precipitated gold as soon as it is perfectly subsided, and the precipitation must be well washed by pouring on it several successive quantities of water. Roman or blue vitriol may be employed for this purpose instead of the green, but it is somewhat dearer, and has no advantage over the other. The gold precipitate thus obtained is very bright and shining. A similar kind may be prepared by putting flat bars or plates of copper into the solution of the gold in aqua regia; but the precipitate is of a brown colour, without any lustre or shining appearance.

This method is more expeditious, as the precipitation is instantaneously made. In the present practice, the (*aurum fulminans*) fulminating gold, or precipitation by alkaline salts, is made by those who gild glass in the greatest perfection; and the volatile alkali is employed for the precipitation by the chemist, who prepares it for this purpose. But when this kind of precipitate is chosen, the use of any flux must be avoided, and a very considerable degree of heat applied.

Where it will not answer the trouble to prepare precipitated powders, that formed of leaf gold may be used in its place; but the precipitates

are more impalpable powders than can be obtained by any different method, and will take a finer burnish than any other kind when employed in this sort of gilding.

The manner of using the precipitates of gold in gilding of glass or enamel, except with respect to the *aurum fulminans*, may be varied two ways, as well as that of the leaf gold; viz. by adding to it or omitting any flux. The convenience of using flux is the same with that before mentioned, with the further advantage of rendering the gilding extremely durable, even to a degree of bearing to be scraped. But the disadvantages are greater; for not lying under the gold, as in the other case, but being mixed with it, the flux destroys the rich metalline look, and, what is still much worse, in many cases prevents its taking a burnish with the true lustre.

In which way soever the powder is used, it is to be tempered with the oil of spike, and worked as the enamel colours; and the quantity of flux, when any is used, may be a third of the weight of the gold. When the gold is thus laid on, the work is ready for burning; which operation must be performed in the same manner, excepting as regards the degrees of heat, as in the ordinary methods of gilding.

In cases where the glass is very hard, or where the opportunity of a strong heat cannot be conveniently obtained, the expedient of using a flux in the following manner may be adopted with great advantage.

Grind glass of borax to a fine powder, and having tempered it with oil of spike, lay it on the glass where the gilding is to be made. Burn then the glass with the degree of heat that will run the borax; and, when it is cold, apply the precipitate, or leaf gold, and burn it again, as in other cases.

In this manner the advantage of a flux may be gained, without the inconveniences before mentioned, and the gold will take a very gentle heat. It is, indeed, attended with double trouble and hazard; but in the case of using leaf gold, where a very good burnish may be wanted, this method will perhaps be found on the whole the most eligible.

The manner of proceeding for burning or annealing the work in this kind of gilding is the same with the treatment of the enamel or glass in the use of the colours, except that the pieces may either be put into the muffles, or coffins; or, in the case of the glass, if there be no painting, the operation may be performed in the naked fire.

After the work is burnt, if it be designed to be burnished, a proper lustre may be given to it by rubbing the gilded part with a dog's tooth, or with a fine agate, or iron burnishers.

## *On the Taking of Mezzotinto Prints on Glass, and Painting upon them with Oil, Water, or Varnish Colours.*

THE painting on glass by means of mezzotinto prints is performed by transferring the ink of the print to the surface of the glass, and thus having obtained a drawing, colouring it by proper pigments tempered with oil, varnish, or oil of a vehicle. This transferring the ink from the print to the glass is effected by cementing the face of the print to the surface of the glass by means of some glutinous body which will not dissolve in water, and then destroying the texture of the paper by water, so that it may be rubbed entirely off from the cement upon the glass,—leaving, at the same time, the whole of the ink of the print upon the cement and glass, in the same manner as if the original impression had been made there.

The particular method of performing this is as follows:

Procure a piece of the best crown glass as near as possible in size to the print to be taken off, and varnish it thinly over with turpentine, rendered a little more fluid by the addition of oil of turpentine. Lay the print then on the glass, beginning at one end, and pressing it gently down in every part in proceeding to the other. This is requisite to prevent any vesicles of air being formed in the laying it on, by the paper touching the cement unequally in different parts; and to

settle the whole more closely to the glass, it is well to pass over it a wooden roller of about the diameter of two inches. Dry then the glass, with the print thus laid upon it, at the first, till the turpentine becomes perfectly hard, and afterwards moisten the paper well with water, until it is thoroughly soaked. After this, rub off the paper entirely from the cement, by gently rolling it under the finger, and let it dry without any heat: the impression of the print will be found perfect on the glass, and may be painted over with either oil or varnish colours.

The choice and treatment of the colours for painting in this way upon glass, in either oil or varnish, may be the same as for any other methods; and it is therefore needless to enumerate any further particulars.

---

*On the Devices employed for the more easily obtaining a just Outline in making Designs from Nature; and on the various Methods of Off-tracing, Calking, and Reducing Pictures, Prints, or Drawings.*

THE drawing accurately and readily after nature, and depicted representations, by the unassisted hand and eye, requires greater practice and command of pencil than fall to the share of many, who nevertheless may not want abilities to colour or shade a picture or drawing when a proper outline

sketch is previously procured. The convenience of quicker despatch is moreover a matter of importance even to those who are most expert in this art. On these accounts, various means have been devised to lead and direct the eye or hand, in forming just outlines of the principal objects which compose the design. These means consist of several methods, founded on different principles.

In the drawing after nature, the interposing a transparent plane is commonly practised; through which plane the objects being seen from a fixed point of view, the outlines of their parts are traced upon it by chalk or some kind of crayon; or such transparent body is divided into squares, through which the objects being viewed, the eye may be enabled to form and dispose them with more certainty, on a paper or other proper ground, divided into a similar number of squares; or some reflected image is obtained by means of a camera obscura, which affords an opportunity both of drawing the figure, and imitating the natural colour of the objects. These are the devices employed for drawing after nature; but where pictures, prints, or drawings are to be copied, various methods are adopted. The most common method is by *off-tracing*, as it is called, which is the laying some transparent substance over the picture, print, or drawing, and passing over the outlines of the principal parts with a pencil or crayon, which delineation is to be afterwards transferred from this transparent body to the ground intended for the painting or drawing. The

second method, which is indeed only another kind of off-tracing, practised sometimes in the case of prints and drawings, is effected by laying the originals on the ground of paper or vellum designed for the copy, the back of the original being smeared with black, or with vermilion mixed with a little butter; or a paper so prepared being laid between the original and copy, and tracing over the principal parts of the design with a needle or some other such like instrument, by which means an outline sketch of it will be formed on the ground of the copy. This method is called *calking*, and is performed also in another way, by puncturing or pricking the original print or drawing, and producing an outline on a new ground, by transmitting a coloured powder through the punctured holes. The third is by dissolving part of the printing ink by means of soap, and impressing it on a fresh ground in that state. Another method much practised is the using squares in the manner above spoken of, in the expedients for drawing after nature, except that here they are to be laid upon the picture. This method is likewise applied to the more certain copying of pictures or drawings, where the new design is to differ in magnitude from the original, in which case it is called *reduction*. For this last purpose there is likewise another method employed, by means of a machine hereafter described for off-tracing, and by which, after drawing over the lines of the original, the new sketch may be made greater or less.

The particular manner of using the transparent plane for taking designs from nature is, by framing a piece of tiffany or fine lawn, of the size of the picture or drawing intended, and fixing it so that the whole view of what is to be painted may be seen through it; a sight-board, that is, a flat piece of wood, with a hole in it, being placed parallel to the tiffany or lawn, in such manner that the eye may command the whole view through it, at the same time that the hand may reach with convenience to draw upon it. The outlines of the object, as they appear through the hole in the sight-board, must then be traced out, on the tiffany or lawn, by a crayon formed of white or red chalk, charcoal, or any proper substance, by which means a sketch of the design will be produced. In order to form a more complete drawing from this crude sketch on paper or vellum, the tiffany or lawn containing it must be carefully laid on such paper or vellum in an horizontal position, and, being well fixed down upon it, must be struck with some flat body in every part, by which means the chalk or matter of the crayon will be transferred from the old to the new ground, and produce the same delineation of the object upon it as was before on the other. The impression thus made on the new ground should be then over-traced with a black-lead pencil, and afterwards corrected, if there be occasion, from the natural view through the sight-board; and this paper or vellum will then contain a proper outline drawing, if the design be intended for a painting in water colours. But when

this method is pursued with a view to a painting in oil, the tiffany or lawn, after the sketch is drawn, must be laid upon the ground of the intended picture, and proceeded with in the same manner as with the vellum or paper; only, in this case, the over-tracing must be made with some kind of crayon instead of the black-lead pencil.

It is advised by some to use paper made transparent by means of oil of turpentine, instead of the tiffany and lawn; but the use of it is only practicable in this way in a darkened room or other confined place, and the paper thus prepared does not become transparent enough, even then, to show minute or remote objects so distinctly as is necessary. If, however, any choose to use it, the usual preparation of the paper is, only to brush it several times over with oil of turpentine, and to suffer it to dry. The transparency will be much improved if a third of nut or poppy oil be added to the oil of turpentine; or otherwise a little crude turpentine or colourless varnish; any of which will render the oil of turpentine more efficacious for this purpose, and save the trouble and expense of rubbing the paper so often over as is otherwise necessary. The paper employed for this purpose should be that called fan-paper, or, if that cannot be procured, fine post paper may be substituted; and where the design is too large to be contained in one sheet, several may be joined together, by laying the edges of the sheets a very little over each other, and cementing them by isinglass glue, which, if neatly done, will only slightly

affect the transparency in the joints. When the original sketch is made on transparent paper, the tracing or drawing may be performed by a black-lead pencil, instead of crayon, which renders the drawing much more perfect and durable; and, being thus completed, it may be used for off-tracing the sketch on any ground intended for a painting in either oil or water. If it be intended for a picture in oil colours, the back of the paper may be smeared with pounded black-lead, charcoal dust, or any powdered crayon; or, what is much better, vermilion mixed with just so much butter as will make it adhere to the paper. It must then be laid on the ground of the picture, and over-traced by a copper or iron stift, or blunted needle, which will make an impression of the sketch on the ground by means of the colour on the back of the paper; or another paper may be coloured, with the black-lead or vermilion, instead of the back of the transparent paper, and being laid between that and the ground, will answer the same end. The means are no way different where the sketch is to be transmitted to paper instead of oil. But in colouring the back of the transparent paper, or that interposed where any such is used, care should be taken that the colour be so wiped off as not to smear the ground, or produce any effect, except where compressed by the instrument in the over-tracing; and this indeed should be regarded to a certain degree even with the oil ground. Where the sketch is large, and made on several sheets of paper, it is convenient to have weights

to place on the four corners of the conjoined sheets, to keep them even and steady on the ground. They are best formed of square pieces of lead with handles, and may be about two or three pounds weight each.

The sketch on transparent paper may be otherwise transmitted to any ground by puncturing it with holes made near each other in the lines of the drawing, and then fixing it on the ground, and dusting over it black-lead or any other coloured matter finely powdered, and tied up in a fine linen cloth. This dust passing through the holes of the pricked paper will delineate the sketch on the new ground, so that it may then be over-traced by any kind of pencil or crayon. Glass has been also used in the same way as the lawn or transparent paper, but its texture hinders it from being well managed with chalk, or any crayon or pencil. There is also another method, not commonly practised, by which a sketch might be well obtained by the use of glass. This is by drawing the outlines of the objects with black colour in drying oil, and when the sketch is finished, laying the paper intended to receive the copy gently, and without any rubbing or shifting, on the glass, having first moistened it with water; by which means the black paint will be transmitted to the paper, as the moisture exhales from it, and an impression made sufficiently exact for the purpose.

The manner of assisting the eye, in designing from nature by means of a plane divided into

squares, is, by drawing cross lines parallel to each other on tiffany or lawn framed, or on transparent paper, or glass. This may be done with common writing ink, or any other way that will render the lines visible; and the divided plane must be then placed before the sight-board in the same manner as was before directed for tracing the outlines. The ground on which the sketch is intended to be taken must be also formed into an equal number of squares; and the objects, being seen through the squares of the transparent plane, will by this means be much more easily disposed in their proper situation, and formed of a just magnitude, by placing them in the corresponding square of the ground, than where the eye had no such medium to compare and judge by. But though the above substances are most commonly used, there is a more simple and effectual way of doing this, which is, by making a frame of a proper size, and dividing the area which it forms into squares, by threads of a moderate thickness. In this way the objects to be drawn are consequently more within the power of the eye than when the most transparent body is used. The drawing by the assistance of squares, to those who have the least command of hand, is by much the most expedient way. But in order to render this or the other methods more commodiously practicable, where it is to be done in the open air, a portable machine should be made for supporting the frame of the transparent plane, and also the sight-board. This machine may be constructed by joining three

long legs together, in the manner of the surveyors' instruments, in a block, and fixing the frame, by means of a foot which will slide into the same box, that it may be raised higher or lower. The sight-board must have a foot likewise, by which it may be raised higher or lower; though this must not be fixed into the block, but into a sliding piece, which must pass through the block horizontally, so that the foot of the sight-board being fixed into it at right angles, the board may be brought nearer to or drawn further from the transparent plane at pleasure.

The second method used to facilitate the drawing after nature, namely, by the reflected image of the object, is performed by the camera obscura, of which a portable kind adapted to this purpose is commonly made by the opticians. It is needless, therefore, to give any description of these instruments, and the structure of them immediately explains the manner of their use on a very slight examination. Where they are not at hand, and a prospect through any particular window is desired to be taken, an occasional camera may be formed. This is to be done by boring a hole through the window-shutter at a convenient height, and putting one of the glasses, called the ox-eye, into the hole; when, all other light being shut out, except what passes through this hole, and a proper ground of paper or vellum, &c. being held at a due distance from the hole, the reflected image of the prospect will be formed upon the ground. If this ground be formed of paper, and fixed steady by a proper

frame, the image will appear very perfectly on the reverse of it, and the artist may stand at the back, and trace the outlines of the necessary parts with great convenience.

Though the taking views of nature by the camera has several conveniences, and seems very advantageous, there is one very material objection to its use. This is, that the shadows lose their force in the reflected image; and objects, by the refraction, are made to appear rounder, or different sometimes both in their magnitude and site, from what they really are; which being opposed to the truth of any drawing, almost wholly destroys the expedience there would be otherwise found in this manner.

The method of making sketches of outlines from pictures, prints, or drawing by off-tracing, is performed by a variety of methods. The most common, where the size of the painting does not forbid it, is to take a sheet of paper prepared by oil of turpentine, or the other means, as above directed for the taking views from nature; and, having fastened it even on the picture or print to be copied, to trace over the principal parts with a black-lead pencil. By this means an outline being obtained, it may be imparted to any other ground, in the manner before described, when the same kind of outline is formed by drawing after nature. Where larger pieces are to be copied, lawn and tiffany may be used, instead of the transparent paper; or several sheets of the paper may be joined together by means of isinglass glue; and when the

outline is traced by chalk, or other proper crayon, the subsequent proceeding may be similar, in this case, as above, where the same kind of outline is taken from nature. Goldbeaters'-skin and horn, as prepared in plates for lanterns, as also the talc or fossil isinglass, and dried hog's bladder, have been likewise applied to this purpose. But where horn or isinglass are used, being rigid bodies that will not yield to impart an impression by retracing, they may be best treated in the manner above advised, in the case of glass, when employed for taking views from nature, which is, by tracing the outlines with black in oil, and printing a new ground of paper with it.

Another common method of off-tracing, in the case of prints or drawings, is to fix them against a window or other hard transparent body placed in a strong light, in a perpendicular position, and to put a piece of paper, vellum, or any other body sufficiently transparent, before them, to perform the off-tracing, by the view which is this way given of the objects in the print or drawing.

The other method of off-tracing, called *calking*, which is sometimes practised in the case of prints and drawings, is performed by tracing on the print or drawing itself, instead of the transparent body laid over it, as in the other manner. The back of it must be previously prepared by rubbing it over with black-lead powdered, or other such matter; or a paper blacked on the under-side may be used, instead of blackening the print or drawing. By either of these methods an outline will

be made on any ground of vellum or paper laid under the print; and if several grounds of very thin paper be laid together under the print, with each a blackened paper over them, so many impressions may be made at one time. The same effect may be produced by puncturing or pricking out the proper outlines in the print or drawing, and then using it for imparting the sketch to another ground, with the black-lead powder, &c. in the manner above described in treating of the use of the oiled paper. When the print or drawing is thus prepared by puncturing, it may be employed for transmitting the sketch to any number of grounds.

The manner of using soap for taking off the impression of a print on a new ground is this: Smear the original over with the common soft soap, commix with water till it be of the consistence of a thin jelly, and then lay it even on the ground intended to receive the impression, which must be also previously moistened with water; after which, being covered with several other papers, the whole must be compressed, by passing a wooden roller over them, or by rubbing strongly on them with the calender-glass used for glazing linen, or by any similar means. The impression of the original will thus be imparted to the new ground, which must be first dried, and then carefully washed with a sponge and water to take off the soap. It has been said by some that this treatment will do very little injury to the original print; but, besides the impracticability of

ever thoroughly cleansing it from the soap, a part of the printing ink is taken from it, and a proportionable share of the effect of the original impression destroyed.

A method parallel to this is sometimes used with prints and drawings, which is by holding them up to the light, and tracing the proper outlines on the back with a black-lead pencil, or any kind of crayon, and then laying the traced side on a ground proper to receive the impression, going over them with a roller or calender-glass, in the same manner as when the impression is taken by means of soap. On the same principle, in the case of compartments, cyphers, or any other regular figures, where both sides are alike, when one half is drawn or traced, the other half may be procured by doubling the paper exactly in the place where the two halves should join, and then pressing or rolling over the outside of the sketched part. By this treatment a corresponding impression of the design will be made on the other side, and the whole sketch will be finished without the trouble of drawing or tracing out the second half.

The method of copying designs by the use of the squares, either in order to paint in equal magnitude, or with a view to reduction, is this: Divide the original into a convenient number of squares, by ruling lines across it with any kind of crayon, and then do the same on the ground in a corresponding manner. The squares on the new ground may be either increased, diminished,

or made equal as to their size, with respect to those of the original, according to the intended proportion of the new piece. The principal use of the squares, in this case, is so much the same as when they are applied to the taking drawings from nature, that it is needless to dwell longer on them. It may be here stated, that to those who can draw at all, the use of the squares is much more advisable, as well as in drawing after nature, than any of the other methods; it is much more improving, and, on the whole, less troublesome, to make a correct sketch in that way than by any other.

The manner of reduction, or, if that be not necessary, of tracing out an outline, where the magnitude of the original is to be preserved, by the machine above mentioned, which was formerly called a *parallelogram*, and by some a *mathematical compass*, cannot be properly understood without an explanation of the construction of the instrument.

This instrument is composed of a board or table, with ten pieces of wood fixed upon it, in a moveable manner; and by such a construction, that when one is moved, the whole of the rest move also similarly, with respect to the directions, but under greater or less angles. The board or table may be of fir deal, and is usually made in the form of a parallelogram. The magnitude of it, as well as of the other parts of the machine, must be according to that of the pictures, &c. intended to be used for reducing. But for the sake of

giving the comparative proportions, it may be stated at three feet in length, and the breadth may be about a foot and a half. It must be planed very even, but should not be of too thin a substance, and it must be covered with cloth stretched even upon it, and fastened down to it. The ten pieces of wood must be formed like rulers used for writing; and in the proportion here taken, they may be a foot long, and about half an inch in breadth, and the fifth or sixth of an inch in thickness. They must be fastened to each other in such manner that every one must be crossed by another in the centre, and by two others at such distance from the centre as exactly divides the two half-lengths on each side of it; except the two which form the extremities, and can be only crossed in the centre and in the middle of one part, which, in each extremity, will be the part opposite to that so crossed in the other, as will immediately appear on the pieces being laid together in the position here directed. The fastening must be by pins or rivets, on which each piece may be turned with perfect freedom; and near each end of every piece must be made a hole or a female screw, into which a crayon, portcrayon, or pencil, may be fixed, either by, or without, a screw. At the ends of those pieces which make the extremities there must be a smaller hole for a pin to be passed through to fasten the conjoined pieces to the board. In order to the more commodiously fixing the several parts of the instrument to the board or table, it

may be proper to have female screws at the places of the table where the rulers are to be pinned down, according to the different applications of the instrument; and the pins for fastening the respective parts must, in this case, have male screws at their extremities, correspondent to the female screws in the table. By these directions, closely followed, the parts of the instrument may be completely formed, and put together.

---

*Colouring or Washing Maps, Prints, &c.*

THE colouring maps or other prints is performed either by spreading opaque colours so thinly on the subject that the full effect of the printing may appear under them, or by using transparent colours which stain the ground and dry away without leaving any opaque body: this last method is called *washing.*

The using opaque colours, or such as have a solid body, in this way on prints, depends entirely on the kind of vehicle used; for if the colour be so suspended by the vehicle that it can be spread equally, it may be applied to this purpose with success; and such as are very strong and bright, even though of the most opaque body, as vermilion, verditer, ultramarine, or turpeth mineral, will answer the end. The best method of doing this, is the using the isinglass size, prepared with sugar or honey, according to the following directions: Take three quarters of an ounce of gum-arabic, and a quarter

of an ounce of gum-senegal. Powder them, and then tie them up in a linen rag, leaving so much unfilled room in the bag as to admit its being flattened by the pressure of the hand. Having squeezed the bag till it is flat, put it into a quart of hot water, and there let it continue, moving it sometimes about, and stirring the water, for about twenty-four hours. The gums will then be dissolved, and the bag must be taken out. The fluid being divided into two parts, to one half of it add a quarter of an ounce of white sugar-candy powdered, and keep the other in its pure state.

The following method is the most advisable for the making the isinglass size: Take half an ounce of the beaten isinglass, and a pint and half of water. Boil them till the isinglass be wholly dissolved, and then strain the fluid, while hot, through a linen rag. Divide the size thus made into two parts, and to one of them add an equal measure of hot water, by which means a strong and weak size will be likewise obtained. This makes the colours of this sort work so freely that they may be diffused almost as easily as the transparent kinds, and with nearly as good effect. But it is proper in most cases to dilute the composition more for the washing of maps, and spreading the colour over large surfaces.

Besides the opaque, there are a number of colours which are semi-transparent, and yet have a body in a greater or less degree. These are carmine, bistre, and gall-stone, in the first degree, with lake and Prussian blue in the second; all

which may be treated in the same manner, but require very different proportion in the strength of the size.

The transparent colours should be preferred for this purpose to either of the other kinds, as their effect is better, and they require no preparation. The colours are, *for red*, red ink,—*for blue*, litmus,—*for green*, sap green and verdigris (in vinegar),—*for yellow*, gamboge, the yellow berry wash and turmeric wash,—*for purple*, the logwood wash and archil,—*for brown*, Spanish liquorice,—and *for black*, Indian ink. These require only to be dissolved in water, which should be more copiously added when employed for washing prints or colouring large grounds of any kind.

It must be carefully observed, in employing the opaque or semi-transparent colours, never to cover any parts so strongly as to prevent the distinct appearance of the shades of the printed design.

In the *illuminating* (as it is called) maps, as little peculiar in the manner is necessary as in the case of other prints; only, the intent of colouring them being to distinguish the divisions of the maps with respect to countries, districts, &c., care must be taken not to lay the fluid colours on so copiously as to flow beyond the limits of what they are intended to cover. The rest depends on the so disposing of the variety of colours in different parts as to give them a strong and pleasing effect, which must depend more on fancy and good taste than on any rules. There is

indeed one thing in particular, which, it may be proper to remark, should be always avoided: it is the laying such colours as have any affinity or likeness close to each other; for by an error in this particular they will be rendered much less effectual with respect to the purpose they are to serve; as it is by such a disposition made more difficult to the eye to distinguish the limits and bounds they are intended to mark out. And moreover, for want of due apposition, the diversification of the colours is made less pleasing, when they are seen at a distance, and considered only with respect to their ornamental appearance. There is one other rule which is more especially necessary to be observed, though many think they are giving most perfection to their work when they most deviate from it: it is, the never using too strong and deep colours for this purpose, as they render the legible characters of the maps less distinct and perceptible. Such a practice is therefore repugnant in a certain degree to the principal intention of the maps, and moreover gives them a tawdry glaring appearance which is very inconsistent with good taste, one great principle of which is simplicity, and the avoiding a false and unmeaning showiness.

Hughes and Co., Printers, King's Head Court, Gough Square.

# A CATALOGUE

OF THE

# PUBLICATIONS

OF

# JOHN WEALE,

ON

## ARCHITECTURE,

## CIVIL, MECHANICAL, AND MILITARY ENGINEERING,

AND ON

## NAVAL ARCHITECTURE,

AND SOME ON

## MEDIÆVAL ART.

---

London:
No. 59, HIGH HOLBORN.

1851.

Hughes, Printer, King's Head Court, Gough Square.

# INDEX OF AUTHORS AND WORKS.

*The figures refer to the pages.*


Adcock, H., 15
Aide-Mémoire, 52
Alphabets, 56, 67
Appendices to Tredgold, 11, 12
Aqueduct, 37
Arches, 23
Architect's and Contractor's Pocket Book, 9
Architectural Drawing Book, 58, 68
Architecture, 53, 67, 69
Architecture of Metropolis, 8
Armstrong, R., 71
Artillery, 52, 53
Atmospheric Railways, 17

Baker, T., 70, 71
Barlow, P., 24
———, W. H., 23
Bland, W., 23
Boilers, 71
Botanic Gardens, 66
Bridges, 20, 22, 23, 67
Buchanan, 24
Buck, G. W., 23
Building, 5
——— Act, 31
——— Stone, 30
Burgoyne, Sir J., 43-52, 69
Burnell, G. R., 22

Cabinet Making, &c., 34, 35
Carpentry and Joinery, 5, 26
Carr, J., 28
Cements, 30, 70
Churches and Chapels, 36, 59, 60, 61, 64, 65
Civil Engineering, 69
Clark, E., 22
Clocks and Watches, 71
Conservatories, 66
Contractor's Pocket Book, 9, 10
Cornish Engine, 4, 13
Curves, 18

Day, J., 17
Decoration, 53—55
Denison, E. B., M.A., 71
Dictionary of Terms, 69, 72
Dilapidations & Nuisances, 32
Dobson, E., 16, 17, 33
Domestic Architecture, 61, 66
Draining, 69
Dredging, 40

Ecclesiastical Art, 53-57
Elizabethan Architecture, 10, 65
Engineer's and Contractor's Pocket Book, 10
Engineering Drawing Book, 59, 68
Estates, 31

Fairbairn, W., 23
Fergusson, J., 27, 29, 63
Fortifications, 53
French Ornament, 35
Frome, Capt., on Surveying, 43

Gailhabaud, 57
*Galton, T., 18*
*Gardens, 66*
*Gardner, E. V., 16*
*Gibbons, D., 31, 32*
Gothic Architecture, 63—65
Gradients, 18
Great Britain Iron Steam Ship, 10, 11
Gregory, Dr. Olinthus, 10

Harbours, 3
Hart, J., 22
Haviland, 34
Heather, J. F., M.A., 71
High Pressure Engines, 4, 14
Houses of Parliament, 24
Huntington, J. B., 18
Hydraulics, 29, 70

India, 62
Inwood, W., 31
Iron, 23, 24
Iron Steam Vessels, 10, 11
Italian Rural Architecture, 7

Jebb, Lieut.-Col., 31
Jerusalem, 62
Jones, Major-Gen. Sir J., 53

Kemp, 66
Knowles, 38

Law, H., 10
Leeds, W. H., 8, 63
Leithart, 33
Lewis, Colonel, 49—52
Lighthouses, 70
Locomotive Engines, 4, 14, 15, 70
Lodges, 35
London Guide, 7
———, Map of, 7

Machinery, 24, 25, 32
Marine Engines, 4
Mathematical Series, 70
Mathematics for Pract. Men, 10
Matthews, W., 29
Mechanic's Workshop, 28, 69
Mechanical Drawing Book, 58
Mediæval Art, 53—57
Meteorology, 33
Military and Civil Engineering, 43—52
Mill Work, 24, 25
Mineral Veins, 33
Mints, 33
Monuments and Chimney-Pieces, 35, 37
Mushet, D., 24
Music, 71

Naval Architecture, 37—39, 71

Oblique Arches, 22, 23
Ornament, 35, 36, 65
Ornamented Iron Work, 35

Painted Glass, 53—55, 59, 60
Palmer, H. R., 29
Pambour, Count, 14, 15
Papers of the Corps of Royal Engineers, 43—52
Parker, Charles, 7
Parks, 35, 66
Patents, 37
Peacocke, R. A., 29
Peake, J., 71
Pole, W., 13, 14, 37
Port of London, 27
Practical Philosophy, 28, 69
Prisons, 31
Public Buildings, 8
Public Works of America, 27, 28
——— Gt. Brit., 26, 27
Pugin, A. W., 63
Pumping Engines, 37

Quarterly Papers on Architecture, 54
——— Engineering, 39—41

Railways, 15—18, 71
Reid, Lieut.-Col., 32, 43, 44
Rennie, George, 24
———, Sir John, 3, 67
Rivers, 29
Roofs, 24, 26
Royal Engineers, 43—52
Rudimentary Works, 69—71
Rural Architecture, 7, 66, 67, 70

Screw Propelling, 12
Sepulchral Monuments, 57
Ship Building, 37—39, 71
Shop Fronts, 7
Sieges, 53
Smith, Major, M.E., 30, 33
Spencer, C. C., 71
Sprague, 57
Stained Glass, 53—55, 59, 60
Staircases and Hand-rails, 6
Stalkartt, 39
Steam Engine, 4, 11—15, 69
Steam Navigation, 10—12
Steel, 24
Stephenson, R., 17
Stevenson, A., 70
———, D., 29
St. Paul's, 67
Strength of Materials, 23, 24
Student's Guide, 33
Suffolk Antiquities, 62
Summerfeldt, 38
Surveying, 43, 71
Symbolic Colours, 33

Tables, 31
Temple Church, 59, 60
Templeton, W., 28
Thorman, R., 16
Tidal Rivers, 29
Tools, 24, 25
Transactions of the Institution of Civil Engineers, 41—43
Travellers' Club, 62
Tredgold, 4, 23, 26
Tubular Bridges, 23, 70

Ventilating, 30, 71
Verandahs, 7
Villa Architecture, 7

Warming & Ventilating, 30, 71
Water, 37
Water Wheels, 29
Wicksteed, T., 13, 14
Wightwick, G., 64
Willis, Prof., F.R.S., Cam., 29
Wilme, B. P., 68
Wood Work, 36
Woods, J., 64

# JOHN WEALE'S

AMENDED

# CATALOGUE OF WORKS.

## 1.

### SIR JOHN RENNIE'S WORK

ON

## THE THEORY, FORMATION, AND CONSTRUCTION OF BRITISH AND FOREIGN HARBOURS.

### Illustrated by numerous Examples.

The history of the most ancient maritime nations affords conclusive evidence of the importance which they attached to the construction of secure and extensive Harbours, as indispensably necessary to the extension of commerce and navigation, and to the successful establishment of colonies in distant parts of the globe.

To this important subject, and more especially with reference to the vast extension of our commerce with foreign nations, the attention of the British Government has of late years been worthily directed; and as this may be reasonably expected to enhance the value of any information which may add to our existing stock of knowledge in a department of Civil Engineering as yet but imperfectly understood, its contribution at the present time may become generally useful to the Engineering Profession.

Impressed with these views, the Author, at much personal inconvenience and at considerable expense, feels it his duty to contribute to the accomplishment of so desirable an object, by the publication of the results of the experience accumulated during the life and practice of the late Mr. Rennie, in conjunction with his own labours; and as it is most desirable to adopt the means of giving extensive circulation to the subjects selected, it has been determined to produce the work at the lowest possible price.

Seventy-four plates, comprising nearly one hundred subjects, are already engraved, and those which illustrate the following ancient and modern Harbours are ready for publication; viz.

| | | | | |
|---|---|---|---|---|
| Ægina. | Cherbourg. | Halicarnassus. | Newhaven. | Sidon. |
| Ancona. | Chester. | Hartlepool. | Nisita. | Stanchio. |
| Antium. | Civita Vecchia. | Holyhead. | Northfleet. | St. Michael, |
| Ardrossan. | Clyde. | Howth. | Palermo. | Sunderland. |
| Athens. | Delaware. | Hull. | Peterhead. | Syracuse. |
| Belfast. | Donaghadee. | Kingstown. | Ponta Delgarda. | Tarentum. |
| Berwick. | Douglas. | Leith. | Port Patrick. | Tunis |
| Boudrun. | Dover. | Liverpool. | Puzzoli. | Tyne. |
| Bridlington. | Fraserburgh. | Messina. | Ramsgate. | Tyre, |
| Brindisi. | Genoa. | Misenum. | Rye. | &c. &c. &c. |
| Carrickfergus. | Girgenti. | Myndus. | Scarborough. | |
| Carthage. | Greenock. | Naples. | Sheerness. | |

Fifty more subjects are in the hands of eminent engravers.

To these it is intended to add numerous details of the principal English and

Continental Harbours, with historical, theoretical, and practical explanations; and it is anticipated that the work will thus obtain the patronage which its novelty and importance are presumed to merit.

The plates and letter-press will be printed in folio, in the best style; and both are in such an advanced state as to guarantee the publication of each Part, containing six plates, with the descriptive letter-press, on the 1st of each succeeding month.

Each Part will be delivered in a handsome wrapper, price 12*s.* for prints; or 18*s.* with proof impressions of the plates; and the work will be completed in Twenty Parts.

Subscribers are requested to forward their names and addresses, as it is intended to print a list of the names of those who by their patronage may promote the successful progress of the publication.

Parts I. to V. are already published. Parts VI. and VII. in May, 1851, and the continuation will be regularly issued every month, till completion.

---

2.

## TREDGOLD ON THE STEAM ENGINE.

In Monthly Parts, price 2*s.* 6*d.* each, in 4to, illustrated by upwards of 200 engravings and numerous wood-cuts, a new and much extended edition of

# THE STEAM ENGINE,

IN ITS PROGRESSIVE AND PRESENT STATE OF IMPROVEMENT:

practically and amply elucidating, in every detail, its modifications and applications, its duties and consumption of fuel, with an investigation of its principles and the proportions of its parts for efficiency and strength; including

EXAMPLES OF

Division A.—1. Locomotive Engines for Railways, practically drawn and explained.
B.—2. Marine Engines for Sea and River Service, with the Construction of Steam Vessels, British and American.
C.—3. Stationary Engines employed for all kinds of Manufacturing Purposes.
D.—4. Engines employed in Mines for raising Water, or for supplying Towns with Water.
E.—5. The Cornish Pumping Engine, and its several effective duties.
F.—6. Engines for Mill-work—Flour-Mills—Cotton and Spinning Factories — Sugar-Refining, &c. &c.
G.—7. High-pressure and Non-condensing Engines, Foreign and English.

---

THE well-known and highly appreciated Treatise, Mr. TREDGOLD'S national Work on the STEAM ENGINE, founded on scientific principles and compared with the practice of the best makers—also showing easy rules for construction, and for the calculation of its power in all circumstances—has commanded a most extensive sale in the several English editions, and in Translations on the Continent. These editions, *now out of print*, have been generally limited to the purchases made by the principals of firms—the price of the work having caused it to remain as a sealed book to the working engineer, the student, the amateur, and the apprentice.

This new and much extended edition will embrace all the most recent im-

provements in the construction and practical operations of the steam engine at home and abroad; and for the purpose of rendering the work more intelligible for study and more practically useful, the algebraic and mathematical calculations will be reduced to simple arithmetic, by which means it will become accessible to all grades of persons, who will thus be enabled to possess, at the moderate expense of 2*s.* 6*d.* monthly, a work which theoretically and practically elucidates the distinguishing peculiarities of the several kinds of steam engines.

As the work will be divided into several sections, either of which may be *purchased separately*, working engineers will be thus enabled to select those portions which more especially apply to the objects upon which they may be respectively employed: every new and useful improvement will be amply noticed, and placed before the subscribers in a practical and useful form.

The superior engravings by which this edition will be illustrated are eminently calculated to create and mature the abilities of a numerous and ingenious class, by whom they have hitherto been unattainable; and to whom this work is now addressed.

Practical engineers, and others interested in the production of this work, are invited to forward such suggestions and contributions as may enhance the high character it has already acquired, developing the practice in the several useful applications of the art by which steam is used, under various modifications, as a motive power.

Several scientific men, extensively and practically employed, have undertaken to contribute original and really practical papers of the utmost utility; by which the value of this extended edition will be much increased. A copious INDEX for reference will be supplied, which will render the work accessible to all classes.

DIVISION A. Locomotive Engines, 41 plates and 55 wood-cuts, complete, making Vol. I. In half-morocco binding, price £2. 12*s.* 6*d.*

*** Some few copies with the plates printed on atlas folio, and text in quarto, price £3. 3*s.*

DIVISION B. Marine Engines, British and American, numerous plates and wood-cuts, making Vol. II., in the course of publication.

---

## CARPENTRY AND BUILDING.

3.

Now complete in 2 volumes 4to, with 190 plates, price £2. 16*s.* in cloth boards, lettered.

## CARPENTRY:

a comprehensive and useful work for Carpenters, Builders, Workmen, and Students in Architecture.

Vol. I. comprises the purely elementary—a book of lines;—geometry;—practical rules on the art of drawing for the operative builder and young student in architecture;—rules for drawing buildings;—principles and practice of colouring, and putting in effects for architectural drawing, &c.

Vol. II. consists of subjects of practical utility and of recent design and construction in the Classic and Italian styles;—plans, elevations, and details

of club-houses, taverns, shop fronts, verandahs, &c.; ancient timber constructions, open roofs, &c.

| | |
|---|---|
| Elementary and practical geometry, or book of lines for a carpenter's guide | 60 |
| Drawings for the operative builder and young student in architecture | 14 |
| Staircases and hand-rails, &c. &c. | 43 |
| Details of the construction of the wooden columns in the New Hall, King's College, Cambridge | 2 |
| Plan and elevation of Athenæum Club-House | 1 |
| Plans, elevation, and details of Arthur's Club-House | 3 |
| Elevations and details of verandahs, principally of examples from Brighton | 26 |
| Girard's College for Orphans, plans, elevations, and sections | 5 |
| Plans, elevations, and sections in constructive art | 2 |
| The Temple of Jerusalem, the type of Grecian Architecture, plans, sections, and elevations | 2 |
| Joiners' work (examples of), elevations, sections, details, and plans of doors, &c. | 5 |
| Details of the roofs of the Charter-House and Clerkenwell church | 2 |
| Shop Fronts, elevation, plans, and details: | |
| Ladies' shoe-maker's, Mount Street, Grosvenor Square | 2 |
| Dyer's, Elizabeth Street, Chester Square | 2 |
| Umbrella and cane shop, Regent Street | 2 |
| Tailor and draper's, Regent Street | 2 |
| Elizabethan terminations of shop fronts and consoles | 1 |
| Details of joinery and carpentry in Windsor Castle, in plan, elevation, &c. | 6 |
| Joinery and carpentry of the Duke of Sutherland's Mansion at Lilleshall | 2 |
| Plans and elevation of the Percy Arms, Lloyd's Square, Pentonville | 1 |
| Elevation of roof at Exeter Hall, and other roofs | 1 |
| Panelling—Interior of the Star Chamber, Westminster | 1 |
| Ecclesiastical wood-work: | |
| Roof of the nave, St. Mary Westonzoyland, Somersetshire | 1 |
| Roof in Lavenham church, Suffolk | 1 |
| Roof in Beresford church, Oxfordshire | 1 |
| Roof in Wantage church, Berkshire | 1 |
| Nave roof, St. Mary's, Bury St. Edmund's [190] | 1 |

The preceding works may be had in separate forms for the convenience of purchasers, each having a distinctive title.

Vol. I.—Elementary part, complete:

Nicholson's Carpenters' New Guide: a book of lines considerably improved, with additions to the present time, and containing an Introduction to Practical Mathematics and Mensuration, together with practical rules on drawing, for the operative builder and young student in architecture 74 engravings, cloth boards, price £1. 4*s*.

Vol. II.—Complete, Practical:

Staircases—details of the construction of wooden columns—plans and elevations of club-houses—twenty-six illustrations of verandahs—practical illustrations of architecture—roofs and ecclesiastical wood-work—joinery of Windsor Castle, and at Lilleshall, Salop—shop fronts, &c 116 plates with text, cloth boards, price £1. 12*s*.

---

4.

## STAIRCASES AND HAND-RAILS.

Practical Examples and Illustrations of Staircases and Hand-Rails, improved to the present time, with several Elizabethan examples,—geometrical stairs,—plan and section of a geometrical staircase and level landing, with quarter space of windows,—plan and section of a geometrical staircase, with *whole space* of windows,—cylinders for strings, casings-off, &c. With text *and 44 plates, price 18s.*

5.

## VERANDAHS.

Select Examples and Designs of Modern Verandahs, consisting of elevations, sections, and details, principally selected from the best examples taken from Brighton, 26 plates, cloth boards, price 12*s.*

6.

In 1 volume, illustrated by 205 engravings, price 9*s.*

## LONDON AND ITS VICINITY

EXHIBITED IN 1851;

comprising its History (Ancient and Modern), Antiquities, Galleries of Art, Public Works, Arts and Manufactures, Learned and Scientific Societies, Public Libraries, Club-Houses and social Institutions, Corporate Bodies, and Government Offices, Observatories, &c., &c., &c.: together with such useful references as are necessarily comprehended in a work of this nature, and an elaborate Map, accurately and scientifically laid down from the meridian of St. Paul's.

7.

## A MAP OF LONDON

TRIGONOMETRICALLY LAID DOWN.

A FINDING MAP OF LONDON and its neighbourhood, drawn and laid down from the several points taken from the meridian of St. Paul's, under the direction of the Ordnance Department.

| | | | |
|---|---|---|---|
| Size: Map 3 ft. 2 in. by 2½ feet, | | price, plain in a sheet | 2*s.* 6*d.* |
| ,, | ,, | coloured in districts | 4*s.* |
| ,, | ,, | plain, in a case | 5*s.* |
| ,, | ,, | mounted, and parishes coloured, in a case | 7*s.* |

8.

## SHOP FRONTS.

Select Examples of Modern Shop Fronts, consisting of tested elevations, with the sections and details. 9 plates, cloth boards, 6*s.*

9.

### ITALIAN RURAL ARCHITECTURE.

In one vol. medium 4to, 72 finely executed plates, price in cloth neat, £1. 16*s.*

## THE RURAL AND VILLA ARCHITECTURE OF ITALY,

portraying the several very interesting examples in that country, with estimates and specifications for the application of the same designs in England; selected from buildings and scenes in the vicinity of Rome and Florence, and arranged for Rural and Domestic Buildings generally.

By CHARLES PARKER, Architect, F.I.B.A., &c.

10.

## ARCHITECTURE OF THE METROPOLIS.

A new edition, with 176 plates, and about 800 pages of letter-press description, half-bound in morocco.

# ILLUSTRATIONS

OF

# THE PUBLIC BUILDINGS OF LONDON:

originally edited by the late AUGUSTUS PUGIN, JOSEPH GWILT, J. BRITTON, and others,

and newly edited and enlarged by W. H. LEEDS.

This is the only work which describes the various structures of the Metropolis *architecturally* by means of plans, elevations, and occasionally both sections and interior views, thus affording a complete and correct knowledge of each edifice in its entire arrangement in all its parts and dimensions.

As studies for the Architect, the subjects contained in this work strongly recommend themselves,—more particularly so, as of the majority of them no plans and elevations are to be met with in any other publication, which materially enhances the interest of this collection, while it preserves to us authentic and tolerably complete records of many buildings which no longer exist. Among these are CARLTON HOUSE, illustrated with several plates, including sections, and a plan of the private apartments; the late ENGLISH OPERA HOUSE; Mr. NASH'S GALLERY, (which has since been dismantled of its embellishments), &c., &c.

To architects, builders, students in architecture, and amateurs, this desirable work for professional use and study is offered at an extremely moderate price.

### LIST OF PLATES AND ABSTRACT OF SUBJECTS.

FIRST DIVISION.

Adam, R., architect.—All Saints' Church, Poplar.—All Souls' Church, Langham Place.—Ancient Theatres.—Astley's Amphitheatre.

Beazley, S., architect.—Berlin, theatre at.—Bordeaux, theatre at.—St. Bride's Church, Fleet Street; spire, interior, and altar-piece.—Burton, Decimus, architect.

Chelsea, church of St. Luke at.—Churches, remarks on galleries in.—Cockerell, C.R., architect.—Colosseum.—Covent Garden, St. Paul's Church.—Covent Garden Theatre.

Dimensions of domes.—Diorama.—Domes, table of dimensions of the principal ones.—Drury Lane Theatre.—Dunstan's, St., in the East, tower of.—Dunstan's, St., in the West, Fleet Street.

Elmes, Mr., his plan for improving the area around St. Paul's.—English Opera House.

Gallery, Royal, and staircase, House of Lords.—George's, St., in the East.—George's, St., Bloomsbury, its steeple.—Gibbs, James, architect.

Halls, dimensions of.—Hanover Chapel.—Hardwick, T., architect.—Hawksmoor, N., architect.—Haymarket Theatre.—Henry the VIIth's Chapel.—Hope, Mr.—House of Lords, staircase, and Royal gallery.

Inwood, Messrs., architects.

James's, St., Piccadilly.—James, St., Theatre.—Jones, Inigo, architect.

Knights Templars.—Knights Hospitallers.

Law Courts, Westminster.—Lyceum Theatre.

Mary, St., Woolnoth, church of.—Mary-le-bone Church, account of.—Mary-le-Bow, St., church, steeple.—Moller, architect.—Monuments at St. Paul's.

Nash, J., architect.—Newman, J., architect.

Opera House, Italian.

Paul's, St., Cathedral; description of the former cathedral; history of the present edifice; description; compared with St. Peter's; monumental sculpture.—Paul's, St., Covent Garden.—Peter-le-Poor, St., church of.—Porticoes, remarks on, by J. B. Papworth.—Pugin, A., architect.

Ralph, his opinion on St. Stephen's, Walbrook; and St. Paul's, Covent Garden.—Repton, G. S., architect.—Royal Amphitheatre, Westminster.

Savage, James, architect; his justification of the tower of Chelsea Church.—Shaw, J., architect.—Smirke, Sir R., architect.—Soane, Sir J., architect.—Spires, remarks on.—Stephen's, St., Walbrook.
Temple Church; history; monuments; description.—Theatres, remarks on.—Thomond, architect.
Walbrook, St. Stephen's.—Walpole, Horace, his opinion of St. Paul's, Covent Garden.—Westminster Abbey.—Westminster Hall.—Willement, T., painted window by, in St. Dunstan's West.—Wilson, E. J., remarks on spires by; description of Westminster Hall.—Wren, Sir Christopher.—Wyatt, Benjamin, architect.

SECOND DIVISION.

Abraham, R., and Adam, Robert, architects.—Arch, Green Park.—Ashburnham House.
Bank of England, account of; New Dividend Pay Office.—Basevi, G., architect.—Banqueting House, Whitehall.—Barry, C., architect.—Barry, James, painter.—Belgrave Square.—Bethlehem Hospital.—Blackfriars' Bridge.—Bonomi, Jos., architect.—Bridges.—London Bridge.—British Museum, account of; description of the new building.—Brooks, W., architect.—Burlington House.—Burton, D., architect.
Carlton Palace.—Chambers, Sir W., architect.—Christ's Hospital, New Hall.—Club-House, Travellers'.—Club-House, Union.—Club-House, University.—Cockerell, C. R., architect.—College of Physicians, Warwick Lane; and Pall Mall East.—Column, the York.—Corn Exchange.—Cornwall Terrace.—County Fire Office.—Custom House.
Dance, Mr., architect.—Dodd, Ralph, engineer.
Eaton Square.
Fishmongers' Hall: former building; new Hall; interior described.—Freemasons' Hall.
Galleries, dimensions of various.—Gandy-Deering, architect.—George's, St., Hospital.—George's, St., Bloomsbury, portico of.—Grecian architecture, modern, remarks on.—Greenough's, Mr., Villa.
Holkam House.—Holland, H., architect.—Hope's, Mr., House.—Horse Guards.—Hospital, Bethlehem.—Hospital, St. George's.
India House.—Intercolumniation, remark on the term.
Jones, Inigo.—Jupp, R., architect.
Kendall, H. E., architect.—Kent, W., architect.—King's College.
Labelye, architect.—Lewis, J., architect.—Libraries, dimensions of some.—London Institution.—London University.—London Bridge, the old one; the new one.
Mansion House.—Mark's, St., North Audley Street.—Museum, British.—Museum, Soanean.—Mylne, R., architect.
Nash, J., architect.—Nash's, J., House and Gallery.—National Gallery.—Newgate.
Palace, Buckingham; interior; sculpture gallery; state apartments.—Papworth's remarks on Somerset House; on English Villas.—Pimlico Institution, portico of.—Pitts, W., sculpture by.—Remarks on the Royal Exchange.—Portico, St. George's Hospital; National Gallery; London University; St. Martin's; St. George's, Bloomsbury; Carlton Palace.—Post Office.—Privy Council Office, &c., account of.
Ralph, Mr.—Regent's Park.—Rennie, J., engineer.—Roberts, H., architect.—Royal Exchange; destruction of the building by fire.—Russell Institution.
Sandby, T., architect.—Saunders, G., architect.—Shaw, J., architect.—Sion Park Gateway.—Smirke, Sir Robert, architect.—Smith, G., architect.—Soane, Sir J., architect, his House and Museum.—Society of Arts.—Somerset House.—Southwark Bridge.
Taylor, Sir R., architect.—Telford, Mr., his opinion of the Mansion House.—Temple Bar.—Terraces in Regent's Park.—Travellers' Club-House.
Vardy, Mr., architect.—Vauxhall Bridge.—Villa, Mr. Burton's.—Villa, Mr. Greenough's.—Villa, Mr. Kemp's.
Union Club-House.—University Ditto.—Uxbridge House.
Walpole, Horace, his character of Lord Burlington; remark on Burlington House.—Ware, S., architect.—Waterloo Bridge.—Westminster Bridge.—Wellington House.
Wilkins, W., and Wren, Sir C., architects.
York Column.—York Stairs Water-gate, &c.

11.

In morocco tuck, price 6*s*.

THE ARCHITECT'S, BUILDER'S, AND CONTRACTOR'S POCKET BOOK OF PRICES, FOR 1851,

comprising the prices of materials used in building; cost, as established by Her Majesty's Office of Woods and Works; with remarks on the rates at which they have been taken by the builders and contractors employed; together with Notitia Architectonica,—principles of construction—on sewers, and sanitary regulations.

12.

In morocco tuck, price 6*s*.

## THE ENGINEER'S AND CONTRACTOR'S POCKET BOOK, REVISED FOR 1851.

13.

In one large vol. 8vo, third edition, revised and enlarged by B. H. LAW, C.E., with engravings, price 21*s*. in strong half-morocco.

## MATHEMATICS FOR PRACTICAL MEN:

being a common-place book of principles, theorems, rules, and tables, in various departments of pure and mixed mathematics, with their application especially for the use of Civil Engineers, Architects, and Surveyors.

By OLINTHUS GREGORY, LL.D., F.R.A.S.

The plates are folded in the book, but spaced out for reference whilst reading any part of the work, and consist of

1 to 5. Geometrical diagrams.—250 figures.
6. Details of a breast water-wheel.
7. Fenton, Murray, & Co.'s steam engine.
8. A six-horse engine constructed by Thos. Middleton, London.
9. A six-horse engine, slides, cylinder, &c.
10. Longitudinal section of locomotive engine.
11. Transverse section of do.
12. Sections of the cylinders of Woolf's engine, Cornish engine, and Atmospheric engine.
13. Isometrical perspective.

14.

SEPARATE PRINTS OF

## ELIZABETHAN ARCHITECTURE AND ORNAMENT.

The work on Elizabethan Architecture, published at 36*s*., being out of print, some few of the engravings may now be had at 1*s*. each, as follows:

View of entrance gate lodge, Claverton.
Claverton terrace-work.
View of Claverton House—entrance.
Compartment of door-way, Holland House.
Details of screen of an old house at Petersfield.
John Thorpe's design for Lord Burleigh.
Fac-simile of an old drawing on parchment, by Robert Pyte. (Henry VIII.)
Screen and staircase, Claverton.
Balusters, stairs, &c., Claverton.
Compartment carving, do.
Door carving. do.
Chimney-piece, do.
Details of chimney-piece.
Details of pilasters.
Details of balustrades.
Plan of the old Manor-House, Claverton.
Interior and chimney-piece of the old Duke's House, Bradford.
Chimney-piece, &c., at Bradford.
Staircase to offices, Holland House.
Entrance porch of do.
Screen at Corsham House, Wilts.
Plan of John Thorpe's House.
Plan of do. (another.)
Elizabethan ornaments.
Sketch.—John Thorpe.
Elizabethan pulpit, North Cray.
Compartment of do., on a larger scale.
Details and carvings of do.
Elizabethan ceilings—Bristol.
Ceilings—Duke's House.
Chimney-piece, Star Chamber, Westminster.
North side of the Star Chamber.
Carved oak pilasters at Petersfield.
Ancient pipe-heads at Claverton.
Cleansing fountain at Nuremburg.
Details of staircase, Holland House.

### STEAM NAVIGATION.

15.

In atlas folio size, with 25 very finely engraved plates by LE KEUX, price 25*s*.

## THE GREAT BRITAIN ATLANTIC STEAM SHIP OF 3500 TONS,

constructed of iron, with engines of 1000 to 2000 horse-power, and the screw propeller; with scales and figured dimensions to all the parts.

LIST OF PLATES OF THE GREAT BRITAIN.

1. Section of fore end of engine-room, looking aft.
2. Section at after end of the boilers.
3. Section through the centre part of the engine-room, looking forward.
4, 5. Plans, elevations, and sections of the cylinders.
6, 7. Main driving shaft and cranks, details.
8, 9. Section at the fore end of the boilers.
10, 11. Air-pump, connecting-rod, elevation and plan of the parallel motion, air-pumps.
12, 13. Piston, rods, and parallel motion blocks, with plan.
14, 15. Section showing the manner of carrying the cargo deck, and disposition of the plate-sleepers in the ship's bottom, after end.
16, 17. Section at the after end of the vessel, showing sleepers and lower cargo deck.
18, 19. Upper cargo deck, forward, showing the mode of fixing to the sides of the vessel.
20, 21. Plan of the engine and boiler-room, upper deck.
22, 23. Longitudinal section through the engines and boilers.
24, 25. End elevation of the screw propeller; elevation of the after end of the vessel, showing screw propeller and rudder.

16.

In one very large-sized plate, finely engraved by LOWRY, price 10*s.*, with scales and measures,

THE SHEER DRAUGHT, BODY PLAN, AND BOTTOM OF THE IRON SHIP

## GREAT BRITAIN.

17.

COMPREHENSIVE AND COMPLETE WORK.

THE APPENDICES TO THE ELABORATE EDITION OF

## TREDGOLD ON THE STEAM ENGINE AND ON STEAM NAVIGATION,

complete; being the Appendices A, B, C, D, E, F, and G, and not included in the new edition of Tredgold;

comprising very amply illustrated subjects on Steam Navigation, Steam Vessels, both of iron and timber, steam engine in the Government Arsenal, Woolwich; marine engines; an investigation and complete development of screw-propelling, and an elaborate treatise and detailed illustrations of the Cornish engine, &c.

Collected and bound uniformly in one folio volume, with the text in medium quarto, half-cloth boards, price £5. 15*s.* 6*d.*; forming a *complete and separate work* from any edition of Tredgold on the Steam Engine.

The engravings are on a large scale, for practical use, and were drawn, explained, and corrected under the direction of the following scientific gentlemen: Messrs. Laird, Liverpool; Seaward, Limehouse; Fairbairn; Oliver Lang, H. M. Shipwright, Woolwich; William Pitcher, Northfleet; Miller and Ravenhill; Sir William Symonds, &c., &c., &c.

APPENDIX A, B.

LIST OF SUBJECTS AND PLATES.

Iron steam yacht *Glow-worm*, constructed by Mr. J. Laird, Birkenhead.
Iron steam ship *Rainbow*, belonging to the General Steam Navigation Company, draught lines at bottom, fore body to a large scale, by Mr. J. Laird.
Plans of the engines of 90-horse-power each, 50-inch cylinders, 4-6 stroke, made by G.

Forrester and Co., Liverpool, and fitted on board the *Rainbow*.
Side elevation and section of ditto.
Transverse section of ditto.
Draught of the American armed steam ship *Fulton*. Half the main breadth, 17 feet; distance between the water lines, 2 feet; fore and after body precisely alike.
Plans of upper and lower decks of the Admiralty yacht *Black Eagle*, with fittings, &c.
Plans of upper and lower decks of the iron steam yacht *Nevka*, built for the Empress of Russia, by Messrs. Fairbairn and Co.
Draught, section, and lines of the *Nevka*.
Cross section of ditto, showing engines, construction of vessel, and paddles.
Body plan, cross section, and saloon; showing joinings, fittings, and decorations.
Mr. John Hague's 12-horse condensing engine, in operation at the Arsenal of Woolwich: elevation, with dimensions of parts and references.
Longitudinal section, ditto, ditto.
Plan, ditto, ditto.
Section, showing boiler, &c., ditto.
End section, showing furnace, &c., ditto.
Mr. Lang's mode of connecting the stem, stern-post, and keel together, for any description of vessel; and Mr. Lang's method of framing the ribs and keels of steam vessels, with a plan of timbers explained, sectional parts, and dimensions.
Chapman's draught lines of bottom, fore and aft bodies; and Mr. Whitelaw's, of Glasgow, new contrivances in the steam engine.

Several of these plates are of large size, and useful to practical men.

## APPENDIX C.—Price 14*s*.

LIST OF SUBJECTS AND PLATES.

General elevation of the starboard engine and boilers of the *Cyclops*, showing the relative position of all the parts connected therewith.
End views of both engines at the paddle shaft, with a section of the vessel taken at the same point, &c.
Front elevation, section in elevation, and plan of the cylinder, steam nozzles, and slide gear, with details of the eccentric, &c.
Different views of the condensing apparatus, feed and bilge pumps, &c.
Details of the parallel motion, connecting-rod and piston, cross-head, &c.
Elevations of part of one paddle-wheel and shaft, &c.
Front elevation of two boilers, &c.
Transverse sections of two boilers, &c.
Plans of the four boilers, &c.
Appendages to the boilers, &c.

Together with several details scattered over the plates.

## APPENDIX D.—Price 10*s*. 6*d*.

## THE ARCHIMEDEAN SCREW, OR SUBMARINE PROPELLER,

ILLUSTRATED:

describing also the inventions and experiments on this important subject.

By ELIJAH GALLOWAY, C.E.

## APPENDIX E, F.—Price £1. 5*s*.

LIST OF SUBJECTS.

West Indian mail steam packet *Isis*, by Mr. Pitcher, Northfleet.
The *Orion* Ipswich steam packet vessel, by Mr. Read, Ipswich.
Engines of the *Isis*, by Messrs. Miller & Co.
H. M. steam frigate of war *Cyclops*, by Sir Wm. Symonds, Surveyor of the Navy.
Engines of the *Dee* and *Solway* West India mail steam packets, by Messrs. Scott, Sinclair, and Co.

The plates are very large, and consist of

Sheer draught and profile of inboard works and after body of the Royal mail West India packet *Isis*.
Lines of bottom, ditto.
Plan of spar deck, showing Captain Smith's life-boats.
Plans of upper and lower decks, ditto.
Midship section, ditto.
Sheer draught, lines of bottom, and after body of the *Orion* Ipswich iron packet.
Plan of deck of ditto.
Longitudinal elevation of one of the engines of the *Isis*.
End elevation of ditto, showing paddles, shaft, and construction of vessel.
Plan of the engines of the *Isis*, together with the boilers, engine-room, &c.
Sheer draught, profile of inboard works, with lines of bottom, and after body, of Her Majesty's steam frigate *Cyclops*.
Plans of upper and lower decks of ditto.
Sketch of spars, sails, &c., of ditto.
Transverse section, and part of frame-work of ditto, showing the admirable construction of this vessel.
Longitudinal elevation of one of the engines of the Royal mail West India packets *Dee* and *Solway*.
Two end views of ditto.
Plan of ditto.

APPENDIX G.—Price £1. 12*s*.

## THE CORNISH PUMPING ENGINE:

designed and constructed at the Hayle Copper-House in Cornwall, under the superintendence of Captain JENKINS; erected and now on duty at the coal mines of Languin, Department of the Loire Inférieur, near Nantes. Nine elaborate Drawings. Historically and scientifically described

By WILLIAM POLE, F.R.A.S., Assoc. Inst. C. E., &c.

LIST OF THE PLATES.

Plan of the engine and boilers.—Side elevation of engine.
End view of engine and boilers.
Details of cylinder, nozzles, valves, hand-gearing, &c.
Details of air-pump, condensers, feed-pump, &c.
Ditto boiler and boiler apparatus.
Elevation and sections of pumps and pit-work.

The text in a 4to volume, and plates in a large folio size.

---

18.

Eight large atlas folio very fine line engravings, by GLADWIN, from elaborate drawings made expressly by Mr. WICKSTEED, in a wrapper folio, together with a 4to explanation of the plates, containing an engraving, by LOWRY, of Harvey and West's patent pump-valve, with specification, price £2. 2*s*.

THE ELABORATELY ENGRAVED

## ILLUSTRATIONS OF THE CORNISH AND BOULTON AND WATT ENGINES

ERECTED AT THE EAST LONDON WATER-WORKS, OLD FORD.

By THOMAS WICKSTEED, C.E.

CORNISH ENGINE.

1. Side elevation of the engine, pump, and stand pipe, with longitudinal section of the engine-house.
2. Longitudinal section of the engine, &c., on an enlarged scale.
3. Plan of the boiler-house and four cylindrical boilers, two of which, together with the warming tube, are shown in section. Plan of the engine-house and engine, with pump, and stand pipe. Longitudinal section of the cataract for opening the equilibrium valve. Elevation of ditto for opening the exhaustion and steam valves.
4. Front elevation of the face of the boilers, a cross section of the four boilers and the warming tube, showing the side and bottom flues, the bridge, fire-bars, and descending flues to bottom flue. Longitudinal section of one boiler and bottom flue, showing the end and main flues in cross section, &c.

BOULTON AND WATT ENGINE.

1. General elevation of the engine, main pump, air vessel, &c., with longitudinal section of the engine-house and well. Elevation of the cylinder, air-pump, and condenser, with transverse section of the engine-house through the cold water cistern.
2. Longitudinal section of the engine-house and engine, main pump, air vessel, &c., to an enlarged scale.
3. Plan of the boiler-house and two boilers, showing the grates and seating of one boiler and section of another through the internal flue. Plan of the engine-house and engine, with pump, air vessel, &c.
4. Longitudinal section of the boiler-house and one boiler. Transverse section of the boiler-house, with transverse section of one boiler, and front elevation of the face of the other, with Stanley's fire-feeder.

19.

In 4to, price 6*s*.

AN EXPERIMENTAL INQUIRY

concerning the relative power of, and useful effect produced by, the

## CORNISH AND BOULTON AND WATT PUMPING ENGINES,

AND CYLINDRICAL AND WAGGON-HEAD BOILERS.

By THOMAS WICKSTEED, C.E.,

Engineer to the East London Water-works.

---

### THE HIGH-PRESSURE ENGINE.

20.

In 2 vols. 8vo, with 28 fine plates by Gladwin, (complete work,) price 16*s*. 6*d*.

## THE HIGH-PRESSURE STEAM ENGINE:

an exposition of its comparative merits, and an essay towards an improved system of construction adapted especially to secure safety and economy.

By Dr. ERNST ALBAN.

Translated from the German, with Notes, by W. POLE, C.E., F.R. Ast. Soc., Assoc. Inst. C.E.

---

### THE LOCOMOTIVE ENGINE.

21.

In demy 8vo, extra cloth boards, price 12*s*.

## THE THEORY OF THE STEAM ENGINE;

showing the inaccuracy of the methods in use for calculating the effects or the proportions of steam engines, and supplying a series of practical formulæ to determine the velocity of any engine with a given load, the load for a stated velocity, the evaporation for desired effects, the horse-power, the useful effect for a given consumption of water or fuel, the load, expansion, and counterweight fit for the production of the maximum useful effect, &c. With an APPENDIX, containing concise rules for persons not familiar with algebraic signs, and intended to render the use of the formulæ contained in the work perfectly clear and easy.

By COMTE F. M. G. DE PAMBOUR.

---

22.

In 4to, with engravings, price 7*s*. 6*d*.

## EXPERIMENTAL RESEARCHES UPON THE LOCOMOTIVE ENGINE,

recently made by MM. GOUIN and CHATELIER on the Versailles and Paris Railway.—Translated by R. LLOYD, C.E.

23.

In 8vo, extra cloth boards, with plates, a second edition, with considerable additions, price 18*s*.

A PRACTICAL TREATISE ON

## LOCOMOTIVE ENGINES UPON RAILWAYS:

The construction, the mode of acting, and the effect of engines in conveying heavy loads; the means of ascertaining, on a general inspection of the machine, the velocity with which it will draw a given load, and the results it will produce under various circumstances and in different localities; the proportions which ought to be adopted in the construction of an engine, to make it answer any intended purpose; the quantity of fuel and water required, &c.; with practical Tables, showing at once the results of the formulæ: FOUNDED UPON A GREAT MANY NEW EXPERIMENTS made on a large scale, in daily practice on the Liverpool and Manchester and other Railways, with different engines and trains of carriages. To which is added an APPENDIX, showing the expense of conveying goods by means of locomotives on railroads.

By COMTE F. M. G. DE PAMBOUR.

---

24.

In 12mo, price 2*s*. 6*d*. in boards.

## RULES AND DATA FOR THE STEAM ENGINE,

BOTH STATIONARY AND LOCOMOTIVE;

and for RAILWAYS, CANALS, and TURNPIKE ROADS; being a synopsis of a course of eight lectures on MECHANICAL PHILOSOPHY; illustrative of the most recent modes of construction, and an exposition of the errors to which patentees and others are liable.

By HENRY ADCOCK, Civil Engineer.

---

### RAILWAYS.

25.

In 1 vol. 4to, with 50 engravings, half-bound in morocco, price £1. 16*s*.

## THE PRACTICAL RAILWAY ENGINEER:

Examples of the Mechanical and Engineering Operations and Structures combined in the making of a Railway.

CONTENTS.

| | |
|---|---|
| Curves, gradients, gauge, and slopes. | Retaining walls, bridges, tunnels, &c. |
| Earthworks, cuttings, embankments, and drains. | Permanent way and construction. |
| | Stations and their fittings. |

*** This work was originally published in three portions. Part III. is still required to complete many copies, and may be had separate, price 15*s*.

26.

In 1 vol. imperial 8vo, with 15 folding plates of works executed, containing tables and explanatory text, price 16*s*.

## AN EASY INTRODUCTION TO RAILWAY MENSURATION,

illustrated by drawings from original works that have been carried out upon various English Railway Lines, showing a plain and easy method of taking out quantities of every description of Railway work and estimating them, and setting out work for the making of Railways generally.

By E. V. GARDNER, C.E.

CONTENTS.

Elementary Introduction, with wood-cuts.—Contract Specifications.—Measurement of Earthwork.—Railway Curves, Tunnelling, &c., &c., &c.

PLATES.

1. Section, part of the Keymer branch of the London and Brighton Railway.
2. Small barrel culverts on the Salisbury branch extension Railway.
3. Large culverts with wing walls on the Salisbury branch extension Railway.
4. Open culverts on the Salisbury branch extension Railway.
5. Bridge for stream at 9 miles 38·50 chains on the Portsmouth extension Railway.
6. Occupation road under the Farnham and Alton Railway.
7. Occupation bridge over the Farnham and Alton Railway.
8. Timber viaduct, Bricklayers' Arms branch of the London and Brighton Railway.
9. Inclined bridge for turnpike road over Railway from Winchester to Southampton.
10. Viaduct over streams at Milford, Salisbury branch extension Railway. 2 plates.
11. Timber viaduct, Tamworth Salt.
12. Timber viaduct, with Iron tension rods for any length.
13. Part of a Railway plan, and the section of it, with the curves set out, and off-sets.
14. Sections of Railway, in embankments and cuttings, with outside fencing, ditches, &c.
15. Part of the plan of the Syston and Peterborough Railway, with curves set off.

---

27.

In royal 8vo, with plates, extra cloth boards, price 5*s*.

## An Historical, Statistical, and Scientific Account of THE RAILWAYS OF BELGIUM FROM 1834 TO 1842.

Translated and compiled from official documents by E. DOBSON, C.E.

---

28.

In 1 vol. 4to, 25 plates, price 12*s*.

## THE TAUNUS RAILWAY:

a concise account, historical, statistical, and mechanical, of the Railway from Frankfort to Wiesbaden, with 25 steel and wood engravings of stations, plans, carriages, &c.

By ROBERT THORMAN, C.E.

29.

In royal 8vo, 28 plates, extra cloth bds., price 12*s*.

## ENSAMPLES OF RAILWAY MAKING;

which, although not of English practice, are submitted, with practical illustrations, to Civil Engineers, and to the British and Irish public.

CONTENTS.

1. Preliminary observations recommendatory of the adoption of a more economical mode of railway making in connection with the great lines already in operation, and a much further extension of a principle of railways for less advantageous traffic than the great lines afford, yet essential for the development of the resources of the country, by employment of material of a less cost. Landed proprietors would find their advantage in the improvement of their land by a quick transit, and, consequently, more ready sale for their produce. In some instances the material is on their estates.
2. Mechanical Works on the Utica and Syracuse Railroad, explanatory, with specification and cost of this, one of the best constructed railroads in the United States, made over swamps, creeks, and valleys, at a cost of £3600 per mile.
3. Historical, statistical, and scientific account of the Railways of Belgium from 1834 to 1842, by E. Dobson, C.E., explanatory of the Railroad from Ostend on the coast to Cologne in Prussia.

---

30.

In small 8vo, third edition, price 8*s*.

A PRACTICAL TREATISE ON THE

## CONSTRUCTION AND FORMATION OF RAILWAYS.

By JAMES DAY, C.E.

---

### ATMOSPHERIC RAILWAYS.

31.

In 4to, with 27 tabular engraved plates, medium 4to, price 7*s*.

REPORT ON

## THE ATMOSPHERIC RAILWAY SYSTEM.

By ROBERT STEPHENSON, Esq., M.P.

---

32.

In 4to, with 10 plates, price 7*s*. 6*d*.

Three Reports on improved methods of constructing and working

## ATMOSPHERIC RAILWAYS.

By R. MALLET, C.E., Dublin.

33.

8vo pamphlet, price 1*s.*

## THE TELOTYPE,

A PRINTING ELECTRIC TELEGRAPH.

By FRANCIS GALTON, Esq., M.A.

34.

In 4to, price 1*s.* 6*d.*

M. ARAGO'S REPORT

## ON THE ATMOSPHERIC SYSTEM,

And on the proposed Atmospheric Railway at Paris, 7½ miles long.

### RAILWAY CURVES.

35.

In 4to, with wood-cuts, second edition, revised and improved, price 3*s.* 6*d.*

A COMPLETE AND MOST IMPROVED SYSTEM OF

## SETTING OUT RAILWAY CURVES:

comprising at once brevity, simplicity, and accuracy.

By GEORGE HEALD, C.E.

36.

In 12mo, price 2*s.* 6*d.*

ON A NEW METHOD OF

## SETTING OUT RAILWAY CURVES.

By ROBERT CHARLES MAY, C.E.

37.

In 8vo, price 6*d.*

A PRACTICAL METHOD OF SETTING OUT

## A CIRCULAR RAILWAY CURVE

By FOSTER CHARLTON, Surveyor.

38.

In 8vo, with plates and wood-cuts, price 2*s.* 6*d.*

EXAMPLES OF

## THE MODES OF SETTING OUT RAILWAY CURVES.

By HENRY LAW, C.E.

And on Setting Out the Width of Ground required for the Works of a Railway or Canal, &c. By W. F. SIMMS, C.E.

39.

Separate from the following, price 3*s.*

## THE TABLES OF GRADIENTS.

*By J. B. HUNTINGTON, C.E.*

40.

In 8vo, in boards, price 18*s*.

Tables and Rules for facilitating the Calculation of

## EARTHWORK, LAND, CURVES, DISTANCES, AND GRADIENTS,

required in the Formation of Railways, Roads, and Canals;—also Essays on the Prismoidal Formulæ, and on the power required upon Inclined Planes.

By J. B. HUNTINGTON, C. E.

---

41.

In 8vo, third and much improved edition, with plates, price 7*s*. 6*d*.

A TREATISE ON

## THE PRINCIPLES AND PRACTICE OF LEVELLING,

showing its application to purposes of Civil Engineering, particularly in the Construction of Roads; with Mr. TELFORD'S Rules for the same.

By F. W. SIMMS, C. E.

---

42.

In a sheet, price 2*s*., a Table showing the Acres, Roods, and Perches in

## IRISH PLANTATION AND BRITISH STATUTE MEASURE,

In any given number of superficial feet, from 1 perch to 5 acres.

By HUGH RICE, C.E.

---

43.

Second edition with additions, in 8vo, with engravings and wood-cuts, cloth boards extra, price 12*s*.

## OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY,

for the Formation of Topographical Plans; and Instructions for Filling in the Interior Detail, both by Measurement and Sketching; Military Reconnaissance, Levelling, &c., &c., together with Colonial Surveying; with the Explanation and Solution of some of the most useful Problems in Geodesy and Practical Astronomy; to which are added a few Formulæ and Tables of general utility for facilitating their calculation.

By Captain FROME, Royal Engineers, F.R.A.S., & A.I.C.E.

---

44.

In a sheet, price 2*s*.

## TABLES FOR ESTIMATING EARTHWORK.

By HENRY LAW, C.E.

## BRIDGES.

45.

In 4 vols. royal 8vo, illustrated by 138 engravings and 92 **wood-cuts, bound** in 3 vols. half-morocco, price £4. 10*s.*; or the plates printed **in a superior** and an atlas form, very neatly bound, price £5. 15*s.* 6*d.*

THE THEORY, PRACTICE, AND ARCHITECTURE

OF

# BRIDGES OF STONE, IRON, TIMBER, AND WIRE;

WITH EXAMPLES ON THE PRINCIPLE OF SUSPENSION.

DIVISIONS OF THE WORK.

THEORY OF BRIDGES. By James Hann, King's College, London.
GENERAL PRINCIPLES OF CONSTRUCTION, &c. Translated from **Gauthey.**
THEORY OF THE ARCH, &c. By Professor Moseley.
PAPERS ON FOUNDATIONS. By T. Hughes, C.E.
ACCOUNT OF HUTCHESON BRIDGE, GLASGOW, with Specification. By the late Robert Stevenson, C.E.
MATHEMATICAL PRINCIPLES OF DREDGE'S SUSPENSION BRIDGE.
ESSAY AND TREATISES ON THE PRACTICE AND ARCHITECTURE OF BRIDGES. By William Hosking, F.S.A., Arch$^{t}$. and C.E.
SPECIFICATION OF CHESTER DEE BRIDGE.
PRACTICAL DESCRIPTION OF THE TIMBER BRIDGES, &c., ON THE UTICA AND SYRACUSE RAILROAD, U. S. By B. F. Isherwood, C. E., New York.
Description of the Plates.—General Index, &c., &c., &c.

LIST OF PLATES.

1. Centering of Ballater bridge across the river Dee, Aberdeenshire.
2. Town's American timber bridge.
3. Do., sections.
4. Do. do.
5. Ladykirk and Norham timber bridge over the Tweed, by J. Blackmore.
6. Timber bridge over the Clyde at Glasgow, by Robert Stevenson.
7. Elevation of arch of do.
8. Transverse section of do.
9. Section of foot-path on do., &c.
10. Occupation bridge over the Calder and Hebble Navigation, by W. Bull.
11. Newcastle, North Shields, and Tynemouth railway viaduct across Willington Dean, plans and elevations.
12. Do., do.
13. Do., sections.
14. Ditto across Ouse Burn Dean, plan and elevation.
15. Do., do.
16. Isometrical view of the upper wooden bridge at Elysville over the Patapsco, on the Baltimore and Ohio Railroad.
17. Elevation and plan of do.
18. Sections of do.
19. Longitudinal section under the central archway of Old London bridge, showing the sunk weir recommended by *Mr. Smeaton to hold the water* up for the benefit of the water-works, &c., in 1763; sections of the same.
20. Plan and elevation of timber bridge for Westminster, as designed by Wesley.
21. Half-elevation of ditto for Westminster, as designed by James King.
22. Westminster timber bridge adapted to the stone piers, by C. Labelye.
23. One of the river ribs of the centre on which the middle arch of Westminster bridge was turned, extending 76 feet, designed and executed by James King.
24. Long elevation and plan of Westminster bridge.
25. Elevation of the foot bridge over the Whitadder, at Abbey St. Bathen's.
26. Weymouth bridge, elevation and plan.
27. Very long elevation of Hutcheson bridge, Glasgow, by Robert Stevenson.
28. Longitudinal section of ditto, showing the progress of the works in 1832.
29. Cross section of do., showing the building apparatus and centre frames.
30. Cross section of Hutcheson bridge.
31. Plan of southern abutment of do.
32. Section of abutments of do.
33. Toll-houses of do.
34. Bridge of the Schuylkill at Market Street, Philadelphia.
35. Details of do.

36. Plan of the wood-work in the starling of the small piers of Chepstow bridge.
37. Longitudinal section through one of the large piers.
38. Details of Chepstow bridge.
39. Plan, elevation, and sections of the central arch of London bridge.
40. London and Croydon railway bridge on road from Croydon to Sydenham, plans, elevations, and sections.
41. London and Croydon railway bridge on road from Norwood to Bromley, do.
42. London and Croydon railway bridge at Sydenham, do.
43. Elevation of the Victoria bridge over the valley of the river Wear, on the Durham junction railway.
44. Elevation of Chepstow bridge.
45. Piling and timber foundations of one of the large piers of Chepstow bridge.
46. Plan of pier, elevation of do.
47. Enlarged section of one of the piers.
48. Newcastle and Carlisle railway bridge, over the river Tyne at Scotswood, by John Blackmore, plan and elevation.
49, 50. Sections and details of do.
51. Elevation and plan of bridge over the Eden at Carlisle, by Sir R. Smirke.
52. Elevation of one of the arches, with a pier, and the north abutment.
52*a*. The centering used for the arches of do.
53. Plan and elevation of the bridge erected over the Thames at Staines.
54. Elevation and plans of the Wellesley bridge at Limerick.
55. Elevation of pier and half-arch, with longitudinal section, plan and section of baluster, transverse section through the crown and spandril.
56. Bridge of Jena, plan and elevation.
57. Do., elevation of one of the land arches, with section of towing-path and retaining wall, transverse section of the bridge at the springing of an arch, plan of do., transverse section of the bridge through the centre of one of the land arches, plan of the abutments, retaining walls, &c.
58. Elevation of the Devil's bridge over the Serchio, near Lucca, Italy; plan, elevation, and cross section.
59. Bridge across the river Forth at Stirling, by R. Stevenson, elevation.
60. Longitudinal section of the same.
61. Timber bridge on the Utica and Syracuse Railway, United States, spans of 40 and 30 feet.
62. Do., span of 60 feet.
63. Do., elevation, plan and cross section, span of 88 feet.
63*a*. Do., isometrical projection.
64. Do., plan, elevation, and cross section, span of 84 feet.
64*a*. Timber bridge, span of 82 feet.
65. Abutment for a bridge of 82 feet span over the Oneida Creek.
66. Trestle bridge, Oneida Creek Valley, span of 29 feet.
67. Do., elevation of span of 100 feet.
67*a*. Do., isometrical projection of truss, connection of floor beams, and cross section.
68. Trestle bridge, Onondago Creek Valley, span of 29 feet.
69. A great variety of details of joinery.
69*a*. Pile-driving machine.
70. Isometrical projections.
70*a*. Isometrical projections of iron plate.
70*b*. Do.
70*c*. Do.
70*d*. Do.
70*e*. Do.
70*f*. Do., culverts.
70*g*. Viaduct under Erie canal.
71. Remains of the bridge over the Adda, at Trezzo, the Milanese.
72. Ely iron bridge, near cathedral.
73. Details of do.
74. Do.
75. Do.
76. Haddlesey bridge, over the Aire, Yorkshire, details of the iron-work.
77. Do.
78. Do.
79. Do.
80. Do., sections of structure.
81. Do., plan, iron balustrades, &c.
82. Do., details.
83. Do., elevation.
84. London and Blackwall Railway bridge over the Lea, elevation and plan.
85. Do., sections and details.
86. Do., sections, enlarged view of railing.
87. Isometrical projection of the suspension bridge at Balloch ferry, constructed on Mr. Dredge's principle.
88. Perronet's design for the bridge over the Seine at Melun, sections, &c.
89. Brighton chain pier, portions of constructive detail.
90. Wreck of do. in Oct. 1833.
91. Do.
92. Longitudinal and transverse sections of cast-iron swing bridge.
93. Longitudinal section and transverse do., plan of turning-plate, roller frame, and bed-plate of cast-iron swing bridge.
94. Elevation and plan of cast-iron swing bridge, Plymouth.
95. Gerrard's Hostel bridge, Cambridge, erected by the Butterley Company, (W. C. Mylne,) elevation and plan.
96. Do., sections and details of do.
97. Do., transverse section of do.
98. Fribourg suspension bridge, general elevation, with a section of the valley of the Sarine and of the mooring shafts, &c.; general plan, ends of main piers, with approaches enlarged, &c.
99. Do., sections and details of do.
100, 100*a*. Do. do.
101. Professor Moseley's diagrams of the arch.
102. Do.
103. Do.
104. Robert Stevenson's elevation of a chain bridge upon the catenarian principle.

105. Robert Stevenson's chain bridge, plan and section of do.
106. Do., longitudinal section.
107. Do., sections, back of arched accesses; plan of pier, showing the cables, &c.
108. Elevation and plan of Darlaston bridge, Staffordshire, by Thos. Telford.
109. Longitudinal and transverse sections.
110. Centering for do.
111. Half-elevation, sections, &c., of Bascule iron bridge for Wellesley Dock works.
112. Plan of do., sections, &c.
113. The Ouse Valley viaduct, London and Brighton railway, longitudinal section, section of wing wall, transverse section of roofed recesses and pilasters.
113*a*. Elevation of north abutment and eight arches of do.
114. Transverse section through centre arch.
115. Plan of superstructure, plan of foundations, transverse section through relieving arches of the Ouse Valley viaduct.
116. Details of do.
117. Plan of swivel bridge, showing ribs, windlass, &c.
118. Elevation of front ribs, showing sections, falling hand-rails, &c.; longitudinal sections, cross sections, &c.
119. Cast-iron swivel bridge on the Newry canal, half-elevation, plan, transverse sections, &c.
120. Do., plan of masonry of abutments, base rings and platform of railway, sections through, plans of abutments, &c.
121. Wire bridge over the Fosse at Geneva, elevation, plan, and several details.
122. Western Railroad, Connecticut, river bridge, elevation, plan, sections, and details.

*** These volumes are ample and diffuse in the explanation and instruction of every principle in this art, and may be truly esteemed as the only comprehensive work of the kind extant.

46.

In 1 vol. 8vo, or in Parts I. II. III. and IV. complete, 40 plates, price 6*s*. in parts, or £1. 5*s*. uniform in half-morocco.

## BRIDGES, SUPPLEMENT,

A CONTINUATION OF THE PREVIOUS WORK.

Being a supplement to the work entitled the 'Theory, Practice, and Architecture of Bridges of Stone, Iron, Timber, and Wire,' comprising recently constructed wrought-iron and tubular bridges, and other kinds of bridges, British and Foreign. Edited by Geo. R. Burnell, C.E.

### OBLIQUE BRIDGES.

47.

In imperial 8vo, 3rd edition, with additions. 11 plates, extra cloth bds., 8*s*.

A PRACTICAL TREATISE ON THE

## CONSTRUCTION OF OBLIQUE ARCHES.

By JOHN HART, Mason.

48.

In 2 vols. royal octavo, comprising text, and folio volume of plates, some of which are coloured; price £4. 14*s*. 6*d*., or on large paper, £6. 6*s*.

THE

## BRITANNIA AND CONWAY TUBULAR BRIDGES;

with general inquiries on beams, and on the properties of materials used in construction.

By EDWIN CLARK, Resident Engineer.

*Published with the sanction* and under the supervision of R. Stephenson, Esq.

49.

In 4to, with a large plate, price 3*s.* 6*d.*

Description to Diagrams for facilitating the

## CONSTRUCTION OF OBLIQUE BRIDGES.

By W. H. BARLOW, C. E.

50.

In 4to, with 12 large folding plates, extra cloth boards, price 14*s.*

A PRACTICAL AND THEORETICAL

## ESSAY ON OBLIQUE BRIDGES.

By GEORGE WATSON BUCK, M. Inst. C. E.

51.

In demy 8vo, with 107 wood-cuts, extra cloth bds., price 7*s.*

## Experimental Essays on the Principles of Construction in ARCHES, PIERS, BUTTRESSES, &c.;

made with a view to their being useful to the Practical Builder.

By W. BLAND, Esq., of Hartlip, Kent.

52.

In one vol. royal 8vo, with several illustrative plates, price £ 2. 2*s.*

## THE CONWAY AND MENAI TUBULAR BRIDGES,

WITH THE EXPERIMENTAL EXPLANATIONS.

By WILLIAM FAIRBAIRN, C. E.

*** Some few copies of the plates printed in folio, the text in 8vo, both very neat in half-morocco, price £ 2. 15*s.*

### STRENGTH OF MATERIALS.

53.

In 2 vols. 8vo, price £1. 4*s.*, 4th edition, much improved and enlarged by EATON HODGKINSON, F.R.S., &c., Manchester; vol. ii. being entirely composed of Mr. Hodgkinson's experiments.

A PRACTICAL ESSAY ON

## THE STRENGTH OF CAST IRON AND OTHER METALS;

intended for the assistance of Engineers, Iron-Masters, Millwrights, Architects, Founders, Smiths, and others engaged in the construction of machines, buildings, &c.: containing practical rules, tables, and examples founded on a series of new experiments; with an extensive table of the properties of materials. Illustrated by several engravings and wood-cuts.

By THOMAS TREDGOLD, Civil Engineer.

54.

In 8vo, a new edition, with corrections, revised by J. F. HEATHER, M.A., and with considerable additions by Prof. WILLIS, of Cambridge; several plates.

A TREATISE ON

## THE STRENGTH OF TIMBER, CAST IRON, MALLEABLE IRON, AND OTHER MATERIALS;

with rules for application in architecture, construction of suspension bridges, railways, &c.; and an Appendix on the powers of locomotive engines on horizontal planes and gradients.

By PETER BARLOW, F.R.S., &c., &c.

55.

In 1 large and thick royal 8vo vol., with several plates, extra cloth boards, price £1. 10*s.*

## PAPERS ON IRON AND STEEL,

Practical and experimental, with copious illustrative Notes.

By DAVID MUSHET, Esq.,

Honorary Member of the Geological and the Quebec Literary and Historical Societies; of the Institution of Civil Engineers of London; Corresponding Member of the Wernerian Natural History Society, Edinburgh.

56.

In 4to, with 8 large engravings and text, 6*s.* sewed in a wrapper.

## AN ACCOUNT OF THE CONSTRUCTION OF THE IRON ROOF OF THE NEW HOUSES OF PARLIAMENT;

with elaborate engravings of details.

### MACHINERY.

57.

The text in 1 large vol. 8vo, and the plates, upwards of 70 in number, in an atlas folio volume, very neatly half-bound in morocco, price £2. 10*s.*

## PRACTICAL ESSAYS ON MILL-WORK AND OTHER MACHINERY;

WITH EXAMPLES OF TOOLS OF MODERN INVENTION.

First published by ROBERT BUCHANAN, M.E.; afterwards improved and edited by THOMAS TREDGOLD, C.E.; and now re-edited, with the improvements of the present age,

By GEORGE RENNIE, F.R.S., C.E., &c., &c., &c.

CONTENTS OF THE PLATES.

1 to 20 consist of drawings of mill-work and machinery, published under the superintendence of the late Mr. Tredgold, and now reprinted.
20*a*. Diagrams of Professor Willis on the teeth of wheels.
21. Bramah's original slide tool, with slide rest and head in one.
22. ——— lathe for turning spheres—*elevation and* end view.
23. Plan of Bramah's slide tool.
24. Nasmyth, Gaskell, & Co.'s great boring lathe.
25. ——— face-turning lathe.
26. Lewis's foot lathe, plan and elevation.
27. ——— seven-feet turning lathe, elevation and side view.
28. Rennie's lathe for turning gun-barrels, elevation and section.

29. Nasmyth's portable hand drill, foot drill.
30. Nasmyth, Gaskell, and Co.'s wall side drilling machine.
31. ——— double pillar drill.
32. Hick's radial drilling machine.
33. Lewis's upright drilling and boring machine.
33 (A). Ditto, ditto, side elevation.
34. Nasmyth, Gaskell, and Co.'s key grooving or slotting machine.
35. Sharp and Roberts's slotting machine.
36. Nasmyth, Gaskell, and Co.'s machine for cutting key grooves in wheels.
37. ——— for cutting slots in cranks.
37 (A). Lewis's slotting and paring machine.
38. Fox's screw cutting machine, elevation and plan.
38 (A). Nasmyth, Gaskell, and Co.'s large screwing machine.
38 (B). Hick's bolt-screwing machine.
39. Nasmyth, Gaskell, and Co.'s self-acting nut cutting machine.
40. Lewis's machine for cutting the teeth of small metal wheels.
40 (A). Lewis's machine for cutting the teeth of large metal wheels, elevation and end view.
41. Nasmyth, Gaskell, and Co.'s machine for cutting teeth of wooden wheel models.
41 (A). M. Clavet's machine for cutting the teeth of wooden and iron model wheels.
42. Nasmyth, Gaskell, and Co.'s vertical boring machine for cylinders.
43. Nasmyth, Gaskell, and Co.'s large ditto.
44. Hick's vertical boring machine, elevation and plan.
45. M. Nicholas Forq's machine for planing iron.
46. Nasmyth, Gaskell, and Co.'s millwright's planing machine, tool moveable, tool fixed.
47. Ditto, ditto.
47 (A). Ditto.
47 (B). Hick's planing machine.
47 (C). ——— ditto.
48. Nasmyth, Gaskell, and Co.'s plate cutting and punching machine.
49. Fairbairn and Co.'s plate bending, also Messrs. N., G., and Co.'s plate cutting machines.
50. Kinnaird and Co.'s punching machine; Hick's mandril for expanding rings.
51. Maudslay and Field's machine for punching boiler plates.
52. Ditto, ditto.
52 (A). M. Cavé's steam punching machine, elevation, end view, and details.
53. Fairbairn and Co.'s riveting machine, plan and elevation.
54. Nasmyth, Gaskell, and Co.'s double face grinding machine, plan, side, and end elevations.
A vignette of James Nasmyth's drawing of the old slide rest principle.
Ditto, parts to larger dimension.
Ditto, illustrative figure of the principle of the planing machine.
Ditto, of the wheel cutting machine.
Ditto, of the screw cutting machine.

The whole forming 70 fine plates, for the most part engraved by LOWRY and LE KEUX, and 103 wood-cuts.

*** Some few copies with the plates folded, in 2 vols. large 8vo, elegantly bound in half-morocco, price £2. 10*s*.

58.

Text in royal 8vo, and plates in imperial folio, price 18*s*.

PRACTICAL EXAMPLES OF

## MODERN TOOLS AND MACHINES:

a supplementary volume to Mr. RENNIE'S edition of BUCHANAN 'On Mill-Work and other Machinery,' by TREDGOLD.

The work consists of 18 plates, elaborately drawn and engraved, of the machinery of Messrs. Maclea and March, Leeds; Messrs. Whitworth and Co., Manchester; and Messrs. Carmichael, of Dundee.

LIST OF PLATES.

1. Maclea and March's fluting machine, end view and details.
2. Plan and side elevation of do.
3. Maclea and March's small fluting machine and lathe, elevation and section.
4. Plan and several details of do.
5. Maclea and March's machine to cut nuts, elevation, end, and side.
6. Plan and details of do.
7. Maclea and March's screwing machine.
8. ——— do.
9. ——— details of do.
10. ——— large slide lathe, parts and details.
11. Maclea and March's gantry, saddle, compound rest, and face plates for do.
12. ——— machine for planing.
13. Elevation of do.
14. Whitworth's patent self-acting lathe, elevation, &c., engraved by Gladwin.
15. ——— planing machine, engraved by Gladwin.
16. ———, end elevation and section, by Gladwin.
17. ———, plan to a large scale, engraved by Gladwin.
18. Messrs. Carmichael's planing machine, elevation, engraved by Gladwin.

## TREDGOLD ON CARPENTRY.

59.

In 1 large vol. 4to, 3rd edition, 50 plates, edited by PETER BARLOW, F.R.S., half-bound in morocco, price £2. 2*s*.

THE

## ELEMENTARY PRINCIPLES OF CARPENTRY:

a treatise on the pressure and equilibrium of timber framing, the resistance of timber, and the construction of floors, arches, bridges, roofs, uniting iron and stone with timber, &c., with practical rules and examples; on the nature and properties of timber, including the method of seasoning, and the causes and prevention of decay; with descriptions of the kinds of wood used in building; also numerous Tables of the scantling of timber for different purposes, the specific gravities of materials, &c.

By THOMAS TREDGOLD, Civil Engineer.

With an Appendix, containing specimens of various ancient and modern roofs.

CONTENTS OF PLATES.

1. Equilibrium and pressure of beams.
2. Pressure of beams and centre of gravity.
3. Equilibrium and pressure of beams and framing.
4. Nailed flooring.
5 to 9. Roofs.
10. Roofs that have been erected.
11. Roof of the riding-house at Moscow.
12. Domes.
13. Partitions and centre.
14. Centres for stone bridges; centre used for the bridge at Neuilly; for the Waterloo bridge, and Conon bridge.
15. Centres for stone bridges.
16. Bridges.
17. Ditto, double plate.
18. Construction of bridges.
19. Bridges, double plate.
20. Bridges and joints.
21. Joints.
22. Joints and straps.
23. Roof and construction of the Pantheon, Oxford Street.
24. Ditto.
25. Section of roof of Hall, Parkhurst Prison.
26. Section of roof of New Saloon, Academy of Arts, Florence.
27. Longitudinal section of ditto.
28. Truss of the roof of the Ducal riding-house, Modena, double plate.
29. Truncated roof of ditto.
30. Truss of roof of ditto.
31. Section of the roof over the Exchange, Geneva, double.
32. Foot of truss of roof over the new theatre at Ancona; ditto, Palazzo Vecchio, Florence; ditto, cathedral, Florence, double.
33. Roofs of the cathedral at Leghorn, ditto.
34. Details of roof of Christ's Hospital, ditto.
35. Ditto.
36. Longitudinal section of St. Dunstan's church, Fleet Street, double.
37. Roof and plan of ditto, ditto.
38. Details of ditto, ditto.
39. Longitudinal section of truss executed at White Conduit House, double.
40. Transverse section of ditto, ditto.
41. Truss at the Thames Plate Glass-works; truss at the Princess's Theatre, Oxford Street; truss at a house in Berkeley Sq.
42. Roof of iron and timber at Nottingham Water-works, treble plate.
43. Cast-iron roof over the model room of the Butterley Company, treble.
44. ——— smithery of the Butterly Company, ditto.
45. Iron and timber roof over the engine manufactory of the Butterley Company, ditto.
46. Roof of the passengers' shed at the London Bridge station, Croydon Railway, double.
47. Roof to King's College Chapel, Cambridge, ditto
48. Ditto, transverse section.
49. Details, ditto.
50. Details, ditto.

Portrait of Mr. Tredgold, and several wood-cuts, showing iron shoes for roofs, &c.

*** Some copies of the plates 23 to 50, with text description, are printed separate, to make the second edition equal with the present edition, price £1. 1*s*.

60.

153 plates, half-bound in morocco, very neat, price £4. 4*s*.; some of the plates coloured, price £5. 5*s*.

## PUBLIC WORKS OF GREAT BRITAIN;

CONSISTING OF

*Railways, Rails, Chairs,* Blocks, Cuttings, Embankments, Tunnels, Oblique

Arches, Viaducts, Bridges, Stations, Locomotive Engines, &c.; Cast-Iron Bridges, Iron and Gas Works, Canals, Lock-Gates, Centering, Masonry and Brickwork for Canal Tunnels; Canal Boats; the London and Liverpool Docks, plans and dimensions, Dock-Gates, Walls, Quays, and their Masonry; Mooring-chains; Plan of the Harbour and Port of London, and other important engineering works, with descriptions and specifications; the whole rendered of the utmost utility to the Civil Engineer and to the student, and as examples to the foreign engineer.

This work is of an imperial folio size, the drawings and engravings have been executed by Eminent Artists, and no expense has been spared in rendering it highly essential for practical use; also, as an ornamental volume of important Engineering Works in several parts of the kingdom. There are some plates in the volume that may be preferred in colours, viz. the elaborate subject of the Blisworth Cuttings, on the Birmingham Line, 18 plates, geologically coloured; Glasgow and Gairnkirk Railway Cutting through Moss.

61.

22 plates, large folio, bound, price £1. 1*s*.

## THE HARBOUR AND PORT OF LONDON,

SCIENTIFICALLY, COMMERCIALLY, AND HISTORICALLY DESCRIBED.

62.

In 8vo, with plates, price 2*s*. 6*d*.

OBSERVATIONS ON

## THE BRITISH MUSEUM, NATIONAL GALLERY, AND NATIONAL RECORD OFFICE;

With Suggestions for their Improvement.

By JAMES FERGUSSON, M.R.I.B.A.

63.

In one vol. imperial 8vo, uniform in size with Mr. Fergusson's 'Jerusalem,' and his work 'Of the Principles of Beauty in Art,' &c., price 12*s*.

AN ESSAY ON A

## PROPOSED NEW SYSTEM OF FORTIFICATION:

With Hints for its Application to our National Defences.

By JAMES FERGUSSON, M.R.I.B.A.

64.

## PUBLIC WORKS

OF

## THE UNITED STATES OF AMERICA.

In two parts, imperial folio, comprising the following very important works:—

CONTENTS OF PLATES.

1 to 13. The Philadelphia gas-works: comprising elevations of building, roof, details, furnaces, retorts, sections of; gasometers, tanks; hydraulic main pipes, &c.; gas meters, washers, &c.

14. Elevation, section, and plan of the re-

servoir dam across Swatara, Pennsylvania, erected by the Union Canal Co.
15. Elevation, section, chamber, and plan of the outlet locks on the Schuylkill canal at Plymouth, Pennsylvania.
16. Lock-gates and details of ditto.
17. Triangulation of the entrance into the Bay of Delawar, exhibiting the exact position of the capes and shoals, with reference to the site of the breakwater.
18. Map of the Delawar breakwater, with the detailed topography of Cape Henlopen, and section of breakwater.
19. Map of the Philadelphia water-works.
20. Ground plan of the northern half of do.
21. Dam, end view of water-wheel, &c.
22. Dam, sections of; pier, &c.
23. Views, section, &c., of force pumps.
24. Improved stop-cock, reducing pipe, circular pipe, double and single branch pipe, bevel hub pipe, &c.
25. Plan of a dam, Sandy and Beaver canal; plan of abutment, cross section, gravelling, &c.
26 and 27. Plan, elevation, and cross section of a lift lock, Sandy and Beaver canal.
28. Gate, front view; front view of falling gate, mitre sill, section, &c.
29, 30. Eastern division, and Sandy and Beaver canal, Ohio, front view; foundation plan, end view, &c., of abutment.
31, 32. Plan of the tye river dam across James river and Kanawha canal.
33. Lock on ditto; plan of 8-feet lift, and sections.
34, 35. Plan of a wooden lock of 8-feet lift, several sections.
36, 37. Plan of Ravenna aqueduct, in elevations and sections; horizontal section at surface of water, plan of pier abutment and wing-walls, &c.
38. Farm Bridge, James river and Kanawha canal; elevation, plan, longitudinal and cross section.
39, 40. Aqueduct over Byrd Creek, on the same canal; elevation, abutment of wings, horizontal section at surface of water, transverse section, &c.

The plates are engraved in the best style of art by the LE KEUXS from elaborate drawings made expressly for the work. Care has been taken that each subject contains every dimension necessary to show proportion and parts of construction.

Price £ 2; and in an 8vo vol., price 6*s*. (sold together £ 2. 6*s*.)

REPORTS, SPECIFICATIONS, AND ESTIMATES

OF

## PUBLIC WORKS OF THE UNITED STATES OF AMERICA:

explanatory of the atlas folio of detailed engravings, elucidating practically these important engineering works.

---

65.

In one small volume, with many plates and wood-cuts, second edition, corrected and improved, neatly bound, price 4*s*. 6*d*., the

## OPERATIVE MECHANIC'S WORKSHOP COMPANION,

AND

THE SCIENTIFIC GENTLEMAN'S PRACTICAL ASSISTANT;

containing a great variety of the most useful Rules in mechanical science, divested of mathematical complexity; with numerous Tables of practical data and calculated results for facilitating mechanical and commercial transactions.

By WILLIAM TEMPLETON, Author of several useful Practical Works.

---

66.

In 18mo, in boards, comprising 390 pages, price 5*s*.

## A SYNOPSIS OF PRACTICAL PHILOSOPHY,

alphabetically arranged, containing a great variety of Theorems, Formulæ, and Tables, from the most accurate and recent authorities in various branches of Mathematics and Natural Philosophy: with Tables of Logarithms.

By the Rev. JOHN CARR, M.A., late Fellow of Trinity College, Cambridge.

## HYDRAULICS.

67.

In 4to, with plates, price 7*s.* 6*d.*

PRACTICAL AND EXPERIMENTAL

### RESEARCHES IN HYDRAULICS.

By R. A. PEACOCKE, C.E.

---

68.

In 4to, with illustrative plates.

### A SYSTEM OF APPARATUS,

for the use of Lecturers and Experimenters in Mechanical Philosophy, especially in those branches which are connected with Mechanism.

By the Rev. R. WILLIS, M.A., F.R.S., &c., &c.,
Jacksonian Professor in the University of Cambridge.

---

69.

In 8vo, with 19 plates, in boards, price 9*s.*

AN HISTORICAL AND SCIENTIFIC DESCRIPTION OF THE

### MODE OF SUPPLYING LONDON WITH WATER;

and a particular account of the different Companies so engaged, with an exposition of the attempts to adopt other modes; together with an account of the contrivances for supplying cities in different ages and countries.

By the late WILLIAM MATTHEWS.

---

70.

In 8vo, with 2 plates, price 2*s.* 6*d.*

REPORT ON THE

### IMPROVEMENT of the RIVERS MERSEY and IRWELL,

between Liverpool and Manchester; describing the means of adapting them for the navigation of sea-going vessels.

By the late HENRY R. PALMER, F.R.S., V.P. Inst. C.E.

---

71.

In 4to, with plates, price 7*s.* 6*d.*

### WATER WHEELS WITH VENTILATED BUCKETS.

By WILLIAM FAIRBAIRN, C.E.

---

72.

In 1 large 8vo volume, with plates, second edition, price 4*s.* 6*d.*

REMARKS ON

### THE IMPROVEMENT OF TIDAL RIVERS.

By DAVID STEVENSON, C.E., F.R.S.E., &c.

## BUILDING STONE—CEMENTS.

73.

In 4to, with very fine plates, a new edition, corrected and extended, 5*s.* sewed.

### Report and Investigation into the Qualifications and Fitness of STONE FOR BUILDING PURPOSES,

MORE PARTICULARLY FOR THE NEW HOUSES OF PARLIAMENT,

and expressly inquired into by Commissioners appointed by Her Majesty, viz. Sir T. Henry De la Beche, Chas. Barry, Esq., and C. H. Smith, Esq.

74.

In 8vo, with a large sectional plate, price 1*s.* 6*d.*

### OBSERVATIONS ON KENTISH RAG STONE AS A BUILDING MATERIAL.

By JOHN WHICHCORD, junior, Architect.

75.

In 8vo, with plates, extra cloth boards, price 10*s.* 6*d.*

### CEMENTS:

a practical and scientific treatise on the choice and preparation of the materials for, and the manufacture and application of, Calcareous Mortars and Cements, artificial and natural, founded on an extensive series of original experiments. By M. L. J. VICAT, Chief Engineer of Roads, &c. Translated from the French; with numerous and valuable additions and explanatory notes, comprehending the most important known facts in this science, and with additional new experiments and remarks.

By Major J. T. SMITH, Madras Engineers, F.R.S., &c.

## WARMING AND VENTILATION OF BUILDINGS.

76.

Second edition, in 1 vol. 8vo, with plates, price 6*s.*

A POPULAR TREATISE ON THE

### WARMING AND VENTILATION OF BUILDINGS;

showing the advantages of the improved system of heated water circulation, &c.

By J. C. RICHARDSON, Architect.

LIST OF PLATES.

1. Elevation of heated water apparatus, and its application in buildings.
2. Apparatus used at the British Museum to warm rooms, with details of furnace.
3. Section of premises of R. Cadell, Esq., Edinburgh, showing the system of warming.
4. Method of warming at the Register Office, Edinburgh.
5. Method of warming the New Justiciary Court, Edinburgh.
6. Strathfieldsaye House, a seat of his Grace the Duke of Wellington—Isometrical *view of closed tubes for* warming.
7. *The Atlas Insurance Office,* Cheapside.
8. Apparatus at the Earl of Radnor's, Coleshill; and the Patent Office, Lincoln's Inn-Fields.
9. Vinery and forcing-house, &c.
10. Plan and section of gallery, picture room and monk's room at the Soane Museum, showing the method of warming.
11. Methods for ventilating and warming private houses and buildings.
12. Example of ventilation and warming in a private building, with details.
13. Method of ventilation and warming at Sir Robert Smirke's office.
14. Practical illustration of downward ventilation and warming, applied in cells

intended for the solitary confinement of prisoners;—an arrangement which prevents sound being conveyed.
15. Illustration of Mr. Bernhardt's system of heated air for warming and airing buildings, smoke-purifying apparatus, &c.
16. Sir H. Davy's plan for warming and ventilating the House of Lords (in 1811), copied from his original drawing;—air machine or fanner for ventilation.
17. Section of the temporary House of Commons, showing Dr. Reid's system for warming, ventilation, and the transmission of sound.
18. Illustration of Dr. Arnott's air stove, and system for warming and ventilating rooms.

77.

In 4to, with 10 plates, price 12*s*.

## MODERN PRISONS:

THEIR CONSTRUCTION AND VENTILATION.

By Lieut.-Col. JEBB, R.E.

The plates of this work fully develop the adopted system of ventilation in the large establishments under Government control.

78.

In 12mo, a new edition, with the Government Table of Annuities, and other recently added valuable Tables, price 7*s*. boards.

## TABLES FOR THE PURCHASING OF ESTATES,

freehold, copyhold, or leasehold, annuities, &c., and for the renewing of leases held under cathedral churches, colleges, or other corporate bodies, for terms of years certain, and for lives; also, for valuing reversionary estates, deferred annuities, next presentations, &c. Together with several useful and interesting Tables connected with the subject. Also, the five Tables of compound interest.

By W. INWOOD, Architect and Surveyor.

79.

In a small and convenient volume, half-bound in morocco, price 3*s*. 6*d*., The

## NEW METROPOLITAN BUILDINGS ACT:

recently passed for the regulation of all kinds of building in and about London. Published under authority, with diagrams, notes, and copious index, and arranged for the use of magistrates, the legal profession, architects, surveyors, builders, and land and house proprietors.

By DAVID GIBBONS, Esq., Special Pleader.

80.

Published by authority, in small 8vo, uniform with the 'Metropolitan Buildings Act,' 7 & 8 Vict. cap. 84, price 2*s*. 6*d*. boards.

PROCEEDINGS UNDER THE

## METROPOLITAN BUILDINGS ACT;

containing a collection of Awards made by the Official Referees; the Modifications sanctioned by the Commissioners of Works, &c.; and some account of the Office established under that Act. To which are added Tables of Fees and a *list of District* Surveyors.

81.

12mo, price 2*s.* 6*d.*

## A MANUAL OF THE LAW OF FIXTURES.

By DAVID GIBBONS, Esq., Special Pleader.

A work written for the use of builders, house agents, and house and land proprietors.

---

82.

In demy 8vo, a new and much extended edition, price 16*s.*

A TREATISE ON

## THE LAW OF DILAPIDATIONS AND NUISANCES.

By DAVID GIBBONS, Esq., of the Middle Temple, Special Pleader.

---

83.

In one vol. 4to, price £1. 1*s.* in boards.

## PROGRESS OF MACHINERY AND MANUFACTURES IN GREAT BRITAIN,

as exhibited chiefly in chronological notices of some letters patent, granted for inventions and improvements from the earliest times to the reign of Queen Anne.

This work has been got up at a considerable cost of time and money.

*** It is intended by H. M. Government to take up the subject from the termination of this volume. It is the commencement of a most valuable antiquarian, historical, and mechanical account of the progress of manufactures and machinery in this country, in addition to its showing the settlement, rise, and fortunes of many families now of the British aristocracy.

---

84.

Third edition, in royal 8vo, boards, with 13 charts, &c., price 12*s.*

## AN ATTEMPT TO DEVELOP THE LAW OF STORMS

by means of facts arranged according to place and time; and hence to point out a cause for the VARIABLE WINDS, with a view to PRACTICAL USE in NAVIGATION.

By Lieut.-Col. W. REID, C.B., and R.E., late Governor of Barbados.

---

85.

In royal 8vo, uniform with the preceding, price 9*s.*, with Charts and wood-cuts.

THE PROGRESS OF THE DEVELOPMENT

OF THE

## LAW OF STORMS AND OF THE VARIABLE WINDS;

With the practical application of the subject to Navigation.

By Lieut.-Col. W. REID, C.B., F.R.S., &c., &c., &c.

86.

In 1 vol. royal 8vo, with plates and a large plate of Meteorological Phenomena, price £1. 1*s*.

## TRANSACTIONS OF THE METEOROLOGICAL SOCIETY.

Instituted in the year 1823.

87.

In 1 vol. 8vo, with 11 plates, price 5*s*.

## MINERAL VEINS;

Practical Observations on their Mechanical Structure, Mode of Formation, the Repletion or Filling, and their Intersection and Relative Age.

By JOHN LEITHART, Mine Agent.

88.

In 1 vol. 8vo, price 7*s*. 6*d*. in boards.

OBSERVATIONS ON THE DUTIES AND RESPONSIBILITIES INVOLVED IN

## THE MANAGEMENT OF MINTS.

By Major J. T. SMITH, H.E.I.C. Engineers, F.R.S., F.R.S.N.A., Master of the Madras Mint, A.M. Cor. Eng. Inst.

89.

In 1 vol. 4to, with illustrative engravings, extra cloth boards, 10*s*. 6*d*.

## AN ESSAY ON SYMBOLIC COLOURS,

in antiquity, the middle ages, and modern times. Translated from the French of Le Baron Frédéric de Portal, Maître des Requêtes, Chevalier de la Légion d'Honneur.

By WILLIAM INMAN, Architect, Assoc. Inst. C.E.

90.

A new and much extended edition in the press, in 1 volume 8vo, with plates.

## THE STUDENT'S, BUILDER'S, AND ARCHITECT'S INSTRUCTOR

in the art and practice of measuring the various artificers' work in building generally: a complete code of instructive rules and examples in the practice of measuring, abstracting, and bringing the quantities into bill, and valuing the several works performed by the different artificers in the erection of buildings.

By E. DOBSON, Assoc. Inst. C.E.

CONTENTS.

Introductory remarks and objects of the work.
On measuring—abbreviation—rotation—abstracting & bringing the quantities into bill—valuation—finding and calculating the decimal for day labour.
Measurement of digging.—Ditto in sidelong ground.
Brick-work of different kinds.—Valuation of, with an engraving illustrating

the mode of measuring.—Abstraction of, rotation, &c., and calculation of labour.
Paving, measurement and valuation of.
Slaters' work, tiling, &c. do.
Carpenters and joiners' work of the several kinds, valuation of, with four engravings, exhibiting the mode of measuring and valuing floors, the interior of rooms, centering, bracketing, pilasters, &c., door cases, linings, sashes and frames, shutters, staircases, &c.
Sawyers' work.
Stonemasons' work, measurement and valuation of the different kinds, with two engravings, showing the mode of measuring staircases, steps, landings, copings, window sills, curbs, string-courses, plinths, architraves, niches, columns, blockings and cornices, stone facings, &c.
Plasterers' work, measurement of, rotation, &c., with an explanatory engraving.
Smiths and ironmongers' work.—Plumbers' work, valuation of.—Painters and glaziers' work, do.—Paper-hangers' work, do.

91.

Just published, price 2*s.* 6*d.*, or mounted on cloth, 3*s.*

## THE CONTRACTOR'S WAGES TABLE.

By EDWARD JOHNSON.

The Table is printed on a large sheet, and shows the various amounts AT ONCE from ¼ to 32 days, advancing regularly ¼ of a day each time, and rated from 1*s.* 6*d.* to 6*s.* per day.

92.

In long and narrow size, for the workman's pocket, bound, price 2*s.* 6*d.*

## THE IMPROVED PORTABLE MEASURER;

containing new sets of Tables for solid and superficial measurement; with scales of prices, and other useful calculations.

By JAMES HAVILAND, Timber Surveyor, &c.

93.

In 1 vol. 8vo, price 5*s.*, a new edition, in boards.

TABLES OF

## SPECIFIC GRAVITIES OF ALL SUBSTANCES;

their superficial and solid contents; land measuring; together with a computation of the difference between the old and new weights and measures; also a definition of mechanical power in the practical use of machinery; the prices of the work of mill-wrights and other artificers; with Tables of interest, discount, &c.

By JAMES HAVILAND, Surveyor.

94.

Bound and lettered, in 4to, price £1. 1*s.*

## CABINET MAKING AND UPHOLSTERER'S DESIGNS:

The modern style of Cabinet Work exemplified, together with the Supplement: 100 plates.

By THOMAS KING.

95.

With 37 plates, 4to, price 9*s*. bound and lettered.

## THE UPHOLSTERER'S GUIDE:

Rules for cutting and forming Draperies, Valances, &c.

By THOMAS KING.

---

96.

Small folio, 60 plates in boards, price 20*s*.

## DESIGNS FOR FURNITURE, PLAIN AND MODERN,

consisting of Tables, Sofas, Chairs of several kinds, Sideboards, Commodes, Wardrobes, Ottomans, &c.

---

97.

In 4to 200 designs in 100 engravings, very neatly half-bound in morocco, price £1. 5*s*.

## OLD ENGLISH AND FRENCH ORNAMENT,

FOR INTERIOR EMBELLISHMENT, AND FOR CARVERS AND DECORATORS; with designs for Doors, Windows, Fire-places, Chimney Glasses, ornamented Furniture, &c. By CHIPPENDALE, JOHNSON, INIGO JONES, LOCK, and others.

---

98.

In imperial 8vo, 41 plates, extra cloth boards, price 16*s*.

DESIGNS FOR

## MONUMENTS AND CHIMNEY-PIECES.

By WILLIAM THOMAS, Architect.

Tombs, monuments, for churches, chapels, and burial grounds, 17 plates: chimney-pieces, in several styles, 24 plates.

---

99.

In imperial 4to, with 50 fine engravings, and 2 fine wood-cuts of the past and present entrances at Hyde Park Corner, drawings contributed by DECIMUS BURTON, Esq.; half-bound in morocco, price £1. 4*s*.

DESIGNS OF

## ORNAMENTAL GATES, LODGES, PALISADING, AND IRON-WORK OF THE ROYAL PARKS,

with some other designs equal in utility and taste, intended for those designing and making parks, terraces, pleasure-walks, recreative grounds, &c. Principally taken from the executed works of Decimus Burton, architect; John Nash, architect; Sydney Smirke, architect; Sir John Soane, architect; Robert Stevenson, C.E.; Sir John Vanbrugh, architect; and Sir Christopher Wren, architect.

LIST OF THE SUBJECTS.

1. Gates to the royal entrance, St. James's Park.
2. Compartment of ditto, enlarged.
3. Plan of St. James's Park.
4. Plan of Hyde Park.
5. Plan of Regent's Park.
6. Marble arch (the late), Buckingham Palace, plan and elevation.

7. Pimlico lodge of ditto, plan and elevation.
8. Colonnade, Hyde Park, entrance from Piccadilly, plan and elevation.
9. Entrance to the Green Park, Piccadilly, front and side elevations and plan.
10. Hyde Park lodge, front and side elevations and plan.
11. Humane Society Receiving-House, plan and elevation.
12. Grosvenor lodge, front and side elevations and plan.
13. Stanhope lodge, do. do.
14. Cumberland lodge, do. do.
15. Gloucester lodge, elevation and plan.
16. Hanover lodge, elevation and plan.
17. Lamp at Hyde Park Corner, with details.
18. Gates centre of colonnade, Hyde Park.
19. Details of ditto, quarter full size.
20. Railing at the head of the Serpentine river, dwarf gates to royal entrance, dwarf railing to lodge, Hyde Park.
21. Stanhope gate rails, ditto.
22. Cumberland gate rails, ditto.
23. Parts and details of preceding.
24. Railing, Park Square, Regent's Park.
25. York gate railing, Regent's Park.
26. Railing, York Terrace, ditto.
27. Railing, Chester Terrace, ditto.
28. Railing to Cambridge and Gloucester Terraces, do.
29. Foot-gate and half of carriage-gate, Cambridge Place, ditto.
30. Railing, Gloucester Gate, ditto.
31. Railing, Clarence Gate, ditto.
32. Ditto, ditto, ditto.
33. Railing, Hanover Gates, ditto.
34. Railing, Sussex Terrace, ditto.
35. Railing, Hanover Terrace, ditto.
36. Lamp and railing, Chelsea Hospital.
37. Parts of iron-work, ditto, to a larger scale.
38. Gates, Hampton Court, (Sir C. Wren.)
39. Ditto, ditto, ditto.
40. Parts of iron-work, ditto, ditto.
41. Iron-work of King's staircase, ditto.
42. Iron-work of Queen's staircase, ditto.
43. Plan and elevation of entrance lodges and iron gates at Greenwich, (Sir C. Wren.)
44. Ditto, ditto, larger scale.
45. Iron gates at Gunnersbury Park.
46. Plan, elevation, and details of ditto.
47. Old Buckingham Palace entrance, iron gates in 1737.
48. Lamp, Stirling Castle.
49 & 50. Elevations of gates and palisading at the Palace of the Grand Sultan, Constantinople.

100.

## A TABLE OF THE WEIGHT OF WROUGHT IRON,

IN OUNCES AND DECIMALS,

accurately constructed to show the Weight per Lineal Foot of Square and Flat Iron to six inches wide, extending to 1058 sizes, and advancing by eighths of an inch in each dimension of breadth and thickness. Also, the Weight of Round Iron to six inches diameter, of all the sizes usually manufactured; and the Weight of Hoop Iron, for Bond, &c., up to six inches in width, advancing by sixteenths of an inch.

The whole carefully revised, and arranged in alternate coloured columns with an ornamental border designed expressly for this work; and forming a Table of Reference for the use of Architects, Engineers, Builders, and Contractors for Works generally.

Size of the Table, 25 inches by 19½, price 6*s.*, and on imperial paper 8*s.* 6*d.* Proof impressions 10*s.* 6*d.* each, or carefully packed for the country and forwarded carriage free, 2*s.* extra. A few copies may be had, mounted on cloth, to fold into embossed cases, 8vo size, price 12*s.*, or, free by post, 12*s.* 6*d.*, and will be found available where portability is desired.

101.

In 1 vol. folio, with 66 plates, half-bound, price £1. 10*s.*

## COLLECTION OF RILIEVO DECORATIONS,

as executed in Papier-Mâché and Carton-Pierré by Messrs. JACKSON and SON, adapted to all the requirements of interior decoration of Mansions, Churches, Theatres, &c., &c., &c.

102.

In folio, in two parts, price 10*s.* each, in both parts 40 plates.

## PATENT CANNABIC ORNAMENT,

for Architectural and Ornamental Decorations, applicable to external as well as internal enrichments.

103.

On 33 folio Plates, engraved in imitation of Chalk Drawings, price 15*s.*

## ORNAMENTS DISPLAYED,

On a full size for Working, proper for all Carvers, Painters, &c., containing *a variety of accurate* Examples of Foliage and Friezes.

104.

In 1 vol. 4to, price 5*s*.

OBSERVATIONS ON THE

## NEW FRENCH LAW RELATIVE TO PATENTS FOR INVENTIONS,

And the Statutes now in force appertaining to Letters Patent for inventions in Great Britain and the Colonies.

By CHARLES EGAN, Barrister-at-Law.

105.

In 1 vol. large 8vo, price 10*s*. 6*d*.

COLLECTION OF THE

## LAWS OF PATENT PRIVILEGES

of all the countries of Europe, the United States of North America, and the Dutch West Indies, in the several languages of the countries of which the laws are here given.

By CHARLES F. LOOSEY, C.E., of Vienna.

106.

In 1 large 4to volume, with 20 plates, price £1. 11*s*. 6*d*.

DESCRIPTION OF

## THE NEW YORK CROTON AQUEDUCT,

IN ENGLISH, GERMAN, AND FRENCH.

By T. SCHRAMKE, C.E.

107.

In 4to, with a plate, price 10*s*. 6*d*.

AN ANALYTICAL INVESTIGATION OF THE ACTION OF THE

## CORNISH PUMPING ENGINE.

By WILLIAM POLE, C.E.

Fellow of the Royal Astronomical Society; Associate of the Institution of Civil Engineers.

This, the third Part, completes the 'Treatise on the Cornish Pumping Engine.' Parts I. and II. may also be had.

### NAVAL ARCHITECTURE.

108.

In 1 vol. 4to text, and a large atlas folio volume of plates, half-bound, price £6. 6*s*.

## THE ELEMENTS AND PRACTICE OF NAVAL ARCHITECTURE;

or, a Treatise on Ship Building, theoretical and practical, on the best principles established in Great Britain; with copious Tables of dimensions, scantlings, &c.

Illustrated with a series of large draughts and numerous smaller engravings.

The 3rd edition, with an Appendix, containing the principles and practice

of constructing the Royal and Mercantile Navies, as invented and introduced by Sir ROBERT SEPPINGS, Surveyor of the Navy.

By JOHN KNOWLES, F.R.S.

LIST OF PLATES.

Perspective of the frame of a 100-gun ship.
Construction of an arch, circles, &c.
Cones.
Capstans, crabs.
Conducting bodies and bars.
Floating bodies.
Representations of a flying proa.
Experiments on stability.
Scales of solidity of tonnage and displacements.
Machines for driving and drawing bolts.
Longitudinal section & plan of a 74-gun ship.

Plates of Details.—The following are exceedingly large:

Construction 1. Draught of a ship proposed to carry 80 guns upon two decks, with detail.
——— 2. Disposition of the frame for a ship of 80 guns.
——— 3. The planking expanded of the 80-gun ship.
——— 4. Profile of the inboard works of the 80-gun ship.
——— 5. Plans of the gun deck and orlop of do.
——— 6. Plans of the quarter deck, forecastle, and upper deck of do.
——— 7. Main gear capstan of an 80-gun ship, windlass, &c., and details.
——— 8. Midship section of a 74-gun ship; midship section of a 74-gun ship, as proposed by Mr. Snodgrass; midship section of a 36-gun frigate; midship section of a 36-gun frigate, as proposed by Mr. Snodgrass; sketches of a new plan proposed for framing ships, and of the best mode of adopting iron-work in the construction, and other details.
——— 9. Sheer draught and plans of a 40-gun frigate, with launch, &c.
——— 10. Sheer draught, half-breadth and body plans of a sloop of war.
——— 11. Draught of the *Dart* and *Arrow* sloops, as designed by General Bentham.
——— 12. A brig of war, 18 guns.
——— 13. Inboard works of do.
——— 14. Plans of the upper and lower decks and platforms of a brig of war.
——— 15. Yacht *Royal Sovereign*.
——— 16. Yacht built for the Prince Royal of Denmark.
——— 17. Plans and section of the interior of a fire-ship.
——— 18. Draught and plans of a bomb vessel.
——— 19. A cutter, upon a new construction, with mode of fitting sliding keels.
——— 20. Sheer draught, half-breadth and body plans of an East Indiaman.
Construction 21. Sheer draught, half-breadth and body plans of a West Indiaman.
——— 22. A collier brig of 170 tons.
——— 23. A Virginia-built boat, fitted for a privateer.
——— 24. A fast-sailing schooner.
——— 25. A Virginia pilot boat
——— 26. A Berwick smack.
——— 27. A sloop of 60 tons in the London trade, particularly distinguished for her capacity and velocity.
——— 28. A Southampton fishing hoy.
——— 29. The long boat of an 80-gun ship, showing the nature of construction by whole moulding.
——— 30. A launch, pinnace, eight-oared cutter, yawl, &c.
——— 31. Wherry, life boat, whale boat, a gig, a swift rowing boat.
——— 32. Laying off, plan of the fore body, sheer and half-breadth plan of the fore body, moulds belonging to the square bodies, &c.
——— 33. Plan of the after body, sheer and half-breadth plans of the after body, &c.
——— 34. After body plan, fore body plan, sheer, and half-breadth plans of the after cant body, sheer and half-breadth plans of the fore cant body.
——— 35. Horizontal transoms, cant transoms, sheer plan, body plan, &c.
——— 36. Square tuck, body plans, sheer and half-breadth plans.
——— 37. Hawse pieces, cant hawse pieces, &c.
——— 38. Laying off of the stern, laying off of the harpins, plan of the stern, sheer plans, body plans.
——— 39. Plans, elevations, and sections of the different contrivances for fitting the store-rooms, &c., on the orlop of an 80-gun ship, showing the method of fitting all ships of the line in future.

109.

Drawn and engraved with dimensions, 8vo text, and folio plates, price 12*s*.

## THE NAVAL ARCHITECT'S PORTFOLIO AND THE STUDENT'S PRACTICAL INSTRUCTOR

in the Construction and Draughting of Ships for War, Mercantile, and Steam-Packet Service—Iron and Timber.

*By H. A. SUMMERFELDT*, Lieut. in the Royal Norwegian Navy.

110.

The plates in large atlas folio, text in folio, price £4. 4*s*.

## NAVAL ARCHITECTURE;

OR,

## THE RUDIMENTS AND RULES OF SHIP BUILDING;

exemplified in a series of draughts and plans, with observations tending to the improvement of that important art.

By MARMADUKE STALKARTT, N.A.

THE PLATES CONSIST OF

1. A long boat for a third-rate, six figures of various draughts.
2. A yacht of 141 tons, ten figures of several draughts.
3. A sloop, 331 tons, sheer draught and bottom, fore and aft bodies.
4. A sloop of war, cant timbers.
5. The bottom and top side.
6. 44-gun frigate, fore and aft, and bottom, a very fine and large engraving.
7. Draughts, several.
8. The shift of the planks in the top side, and the disposition of the timbers in do.
9. 74-gun ship, sheer draught and bottom, fore and aft bodies.
10. Draughts, several.
11. Right aft, a level view of the stern of a 74-gun ship, side view of the head and quarter gallery, &c.
12. A cutter, draughts, &c.
13. Exact method of ending the lines of different sections.
14. A frigate, sheer draught, bottom, fore and aft bodies.

*** These plates exhibit fineness and correctness of drawing and engraving, and upon a large scale of rare occurrence.

### CIVIL ENGINEERING.

111.

In 6 vols. medium 4to, with numerous elaborately engraved plates, price £7. 7*s*.

## QUARTERLY PAPERS ON ENGINEERING,

comprising useful papers on civil and mechanical engineering, and the biography of some Engineers, among which will be found memoirs of James Brindley, William Chapman, Samuel Clegg, and William Jessop;—papers on atmospheric and other railways, on steam engines, locomotive engines, and Cornish pumping engines; on dredging machines, on docks, harbours, jetties, piers, breakwaters, and havens of safety; progress of the Thames tunnel fully narrated, accidents, remedies, &c.; engineering of the United States and Holland; iron roof to the new Houses of Parliament; on the manufacture of bricks and tiles; on slate quarries; on suspension and other bridges; on inventions and patents; on water-wheels and supply of water, and on hydraulics; on drainage, &c., &c.

VOLUME I.

Memoir of James Brindley, C.E.
Memoir of William Chapman, C.E.
Dredging machine.
Account of the engines of the Russian steam frigate of war, Kamschatka.
Hints on some improvements of the steam engine.
Notices of works on engineering.
On the setting out the ground for railways and canals.
On the utility and construction of the dredging machine.
On the construction of jetties and breakwaters.

25 engravings and wood-cuts.

112.

VOLUME II.

Report on the Kingstown and Dalkey atmospheric railway.
On a novel method of applying atmospheric pressure.
Memoir of Samuel Clegg, C.E.
Peclet's treatise on heat.
On dredging. By Messrs. Bury, Curtis, & Kennedy.
Harbours of the south eastern coast.
Restoration of Herne Bay pier.
Examples of engineering in the United States.
On havens of safety.
Report on Holyhead and Port Dynllaen Harbours.
On the loss by friction in beam and direct action steam engines.
On the engineering of Holland.
On the consumption of fuel in locomotive engines.
Sir John Macneill's report on the atmospheric railways.

50 engravings.

113.

VOLUME III.

Peclet on heat.
On the harbours of Holyhead, &c.
On the construction of a harbour in connection with Granton Pier.
Iron roof of the New Houses of Parliament.
On slate quarries.
Woolf's patent steam engine.
Lectures on American steam navigation.
Arago on atmospheric railways.
Cast-iron bridge at St. Petersburg.
The Thames Tunnel.
On road making.
On the manufacture of bricks and tiles in Holland.

28 plates.

114.

VOLUME IV.

Hydrostatic and hydraulic docks, patent slips, &c., of the United States.
Ancient and present state of the harbour of Rye.
On the application of atmospheric pressure to railways.
On the construction of suspension bridges.
On the principles and practice of application of water power.
Experiments on locomotive engines.
Introduction of steam engines into Naval Arsenals and machinery, &c.
On forming foundations under water and on bad ground.
On the improvement of the River Medway, and of the Fort and Arsenal of Chatham.
On the improvement of Portsmouth Harbour.
Analytical investigation of the action of the Cornish pumping engine.
On water wheels.
On French and English patents.
Reports on the constructing and working atmospheric railways.

38 plates.

115.

VOLUME V.

On the machinery and manufactures in Great Britain, from the Saxon era to the reign of Queen Anne.
Researches in hydraulics.
The Thames Tunnel.
Arnollet's atmospheric railway.
German railways.
Sunderland docks.

53 engravings.

116.

VOLUME VI.

On the principles and practice of the application of water power.
Experiments on locomotive engines.
On the introduction of steam-engines into Naval Arsenals.
On the mode of forming foundations under water and on bad ground.
On the improvement of the River Medway, and of the Fort and Arsenal of Chatham.
On the improvement of Portsmouth Harbour.
Analytical investigation of the action of the Cornish pumping engine.
On water-wheels.

30 Plates.

The Work complete in 6 vols. elegantly half-bound in red morocco, price £ 8. 8*s*.

*** *But very few complete copies of this work now remain on hand; a large portion of the stock having been destroyed by fire at the warehouse of a Bookbinder, who had the care of it for collation.*

117.

## TRANSACTIONS
OF
## THE INSTITUTION OF CIVIL ENGINEERS.

VOLUME I.

In 4to, containing a portrait of the late President, Thos. Telford, Esq., with 27 finely engraved plates, and numerous vignette embellishments of portraits of Engineers and their works, price 30*s*. extra cloth bds.

LIST OF SUBJECTS.

Introduction, with illustrations.
An account of the harbour and docks of Kingston-upon-Hull. By Mr. TIMPERLEY, Resident Engineer to the Hull Dock Company.
On the locks commonly used for river and canal navigation. By W. A. PROVIS, M. Inst. C.E.
Improved canal lock. By J. FIELD, F.R.S., V.P.
On the strain to which lock gates are subjected. By P. W. BARLOW, C.E.
On the hot-air blast. By J. B. NEILSON, C.E.
On the relation between the temperature and the elastic force of Steam, when confined in a boiler containing water. By JOHN FAREY, M. Inst. C.E.
On ventilating and lighting tunnels, particularly in reference to the one on the Leeds and Selby Railway. By J. WALKER, F.R.S., L. & E.
Particulars of the construction of the Lary bridge, near Plymouth. By J. M. RENDEL, C.E.
Experiments on the power of water-wheels.
On the construction of oblique bridges.

Account of coals used in coke ovens and retorts, and coke produced from one year's work at the Ipswich gas-works. Communicated by W. CUBITT, F.R.S.

An approximative Rule for calculating the velocity with which a steam vessel will be impelled through still water, by the exertion of a given amount of mechanical power, or forcible motion, by marine steam engines. Communicated by JOHN FAREY, C.E.

On the effective power of high-pressure expansive condensing steam engines, commonly in use in Cornish mines. By T. WICKSTEED, C.E.

Description of the plan of restoring the arch-stones of Blackfriars' Bridge. By Mr. JAMES COOPER, C.E.

On the force exerted by hydraulic pressure in a Bramah press; the resisting power of the cylinder, and rules for computing the thickness of metal for presses of various powers and dimensions. By PETER BARLOW, F.R.S.,&c.

Account of some experiments on the expansion of water by heat. By the late T. TREDGOLD, C.E.

On procuring supplies of water for cities and towns, by boring. Communicated by JOHN SEAWARD, C.E.

Account of several sections through the plastic clay formation in the vicinity of London. By WILLIAM GRAVATT, F.R.S., C.E.

Accounts of borings for water in London and its vicinity. By JOHN DONKIN, M. Inst. C.E.

Description of the method of roofing in use in the Southern Concan, in the East Indies. By Lieut. FRAS. OUTRAM, Bombay Engineers.

Experiments on the resistances of barges moving on canals. By HENRY R. PALMER, C.E.

Elementary illustration of the principles of tension and of the resistance of bodies to being torn asunder in the direction of their length. By the late T. TREDGOLD, C.E.

Details of the construction of a stone bridge erected over the Doria Riparia, near Turin. By Chevalier MOSCA, Engineer and Architect to the King of Sardinia, &c., &c. Drawn up and communicated by B. ALBANO, C.E.

Memoir on the use of cast iron in piling, particularly at Brunswick Wharf, Blackwall. By MICHAEL A. BORTHWICK, C.E.

Account of the new or Grosvenor bridge over the river Dee at Chester.

Account of some experiments made in 1823 and 1824, for determining the quantity of water flowing through different shaped orifices. By BRYAN DONKIN, F.R.A.S., &c.

On the changes of temperature consequent on any change in the density of elastic fluids, considered especially with reference to steam. By THOMAS WEBSTER, M.A., Trin. Coll., Camb.

Method of representing by diagram and estimating the earthwork in excavations and embankments. By Mr. JOHN JAMES WATERSTON, C.E.

Remarks on Herm granite. By FREDERICK C. LUKIS, of Guernsey, in reply to inquiries from the President: with some experiments made by the latter on the wear of different granites.

Experiments on the force required to fracture and crush stones; made under the direction of Messrs. BRAMAH and SONS, for B. WYATT, Architect.

Canal boat experiments. By Sir JOHN MACNEILL, C.E., F.R.A.S., M.R.I.A.

118.

VOLUME II.

In 4to, containing 23 finely engraved plates, price 28*s.* extra cloth bds.

LIST OF SUBJECTS.

*Account of the bridge over* the Severn, near Tewkesbury, designed by the late

Thomas Telford, Esq., and erected under his superintendence. By W. MACKENZIE, C.E.

Series of experiments on different kinds of American timber. By Sir W. DENISON, Capt. Royal Engineers, F.R.S., &c.

On the application of steam as a moving power, considered especially with reference to the economy of atmospheric and high-pressure steam. By GEORGE HOLWORTHY PALMER, C.E.

Description of Mr. H. Guy's method of giving a true spherical figure to balls of metal, glass, agate, or hard substances.

On the expansive action of steam in some of the pumping engines at the Cornish mines. By WILLIAM JORY HENWOOD, F.G.S., Secretary of the Royal Geological Society of Cornwall, H. M. Assay-Master of Tin in the Duchy of Cornwall.

On the effective power of the high-pressure expansive condensing engines in use at some of the Cornish mines. By THOMAS WICKSTEED, C.E.

Description of the drops used by the Stanhope and Tyne Railroad Company, for the shipment of coals at South Shields. By THOMAS E. HARRISON, C.E.

On the principle and construction of railways on continuous bearings. By JOHN REYNOLDS, Esq.

Wooden bridge over the River Calder, at Mirfield, Yorkshire, designed and erected by WILLIAM BULL, C.E.

A series of experiments on the strength of cast iron. By the late FRANCIS BRAMAH, C.E.

On certain forms of locomotive engines. By EDWARD WOODS, C.E.

Description of Youghal bridge, designed by Alexander Nimmo. By JOHN E. JONES, C.E.

On the evaporation of water from steam boilers. By JOSIAH PARKES, C.E.

Account of a machine for cleansing and deepening small rivers, in use on the Little Stour river, Kent. By W. B. HAYS, C.E.

Description of the perpendicular lifts for passing boats from one level of canal to another, as erected on the Grand Western Canal. By J. GREEN, C.E.

On the methods of illuminating lighthouses, with a description of a reciprocating light. By Major J. T. SMITH, Madras Engineers, F.R.S., &c.

Experiments on the flow of water through small pipes. By W. A. PROVIS, C.E.

Experiments on the power of men. By JOSHUA FIELD, C.E., F.R.G.S., &c.,

Particulars of the construction of the floating bridge lately established across the Hamoaze, between Torpoint and Devonport. By J. M. RENDEL, C.E.

APPENDIX.—Officers, Members, &c.

---

**MILITARY AND CIVIL ENGINEERING.**

119.

PAPERS ON SUBJECTS CONNECTED WITH THE DUTIES

OF

## THE CORPS OF ROYAL ENGINEERS.

VOLUME I.

In 4to, 2nd edition, with plates and wood-cuts, extra cloth boards, price 16*s*.

CONTENTS.

On assaults. By Lieut.-Colonel REID, R.E.

Account of the attack on Fort Laredo, near Santoña.

Notes on concrete. By Capt. Sir W. Denison, R.E.
Method adopted for underpinning with concrete the store-houses in Chatham Dockyard. By the same.
Concrete bomb-proof erected at Woolwich, with detailed experiments as to the effect produced on it by the fire of artillery. By Capt. Alexander, R.E.
Concrete sea wall at Brighton, and the groins which defend the foot of it. By Lieut.-Colonel Reid, R.E.
Groins used on the coast of Sussex for preventing the encroachment of the sea. By Capt. Luxmoore, R.E.
Table for determining altitudes with the mountain barometer. By S. B. Howlett, Chief Draughtsman, Ordnance.
New method of making perspective drawings from plans and dimensions. By the same.
New field protractor and sketch-book. By the same.
New method of plotting a survey. By the same.
New station pointer. By the same.
New line divider and universal scale. By the same.
Causes which led to the construction of the Rideau canal, connecting the waters of Lake Ontario and the Ottawah; the nature of the communication prior to 1827, &c. By Capt. Frome, R.E.
Account of the failure of a part of the Brighton chain pier, in the gale of the 30th of November, 1836. By Lieut.-Col. Reid, R.E.
Landing wharf erected at Hobbs' Point, Milford Haven, for the accommodation of the steam packet establishment, giving bells and machinery used in the erection, &c. By Captain Savage, R.E.
Extracts from a Report on the copper pontoons used in the Neapolitan service, in 1805, with remarks on the inefficiency of all open pontoons of the common rectangular form, for the passage of rapid rivers. By Major-Gen. Sir C. W. Pasley, &c., &c.
Investigation of the position of the horizontal axis of a self-acting sluice-gate, from the 'Mémorial du Génie.'
Kyan's process for the preservation of timber from dry-rot, with a description of the tank erected for that purpose in the Royal Arsenal, Woolwich. By Lieut.-Colonel Alderson, R.E.
Hints for the compilation of an Aide-Mémoire for the Corps of Royal Engineers. By Lieut.-Col. Reid, R.E.

---

120.

VOLUME II.

In 4to, 2nd edition, with plates and wood-cuts, extra cloth bds., price £1. 5*s*.

CONTENTS.

On intrenchments as supports in battle, and on the necessity of completing the military organization of the Corps of Royal Engineers. By Lieut.-Col. Reid, R.E.
Notes on the charges of military mines. By Capt. Sir W. Denison, R.E.
Account of the demolition of the glacière bastion at Quebec, in 1828.
Demolition of the south face of Fort Schulemburg. By Maj. Marshall, R.E.
Demolition of the piers of the entrance chamber of the large basin at Flushing, in 1809. By Major-Gen. Fanshawe, R.E.
*Extract of a letter from Colour-Serj*t. Harris, Royal Sappers and Miners, to

Col. PASLEY, R.E., on the mode in which a stranded ship was blown to pieces.

Notes on the formation of breaches by artillery: Experiments at Metz, and practice against Carnott's wall at Woolwich. By Capt. Sir W. DENISON, R.E.

Memoir on the fortifications in Western Germany.

On contoured plans and defilade. By Capt. HARNESS, R.E.

Report on the Manchester, Cheshire, Staffordshire, and the South Union lines of railway. By Col. ALDERSON, R.E.

Rideau dams. By Capt. Sir W. DENISON, R.E.

Memorandum of the manner in which the several repairs of the chain pier at Brighton have been executed, together with some reflections on its construction and durability. By Major PIPER, R.E.

Further observations on the moving of the shingle of the beach along the coast. By Lieut.-Col. REID, R.E.

Coast defences in Holland. By Captain SANDHAM, R.E.

Hurricanes. By Lieut.-Col. REID, R.E.

On the fact of small fish falling during rain in India. By Capt. C. W. GRANT, Bombay Engineers.

Instructions for making and registering meteorological observations in Southern Africa, and other countries in the South Seas, as also at sea. By Sir John F. HERSCHELL, K.H., F.R.S.

Construction of barracks for tropical climates. By Capt. SMYTH, R.E.

Memorandum relative to a system of barracks for the West Indies, recommended by Col. Sir C. F. SMITH, C.B., R.E. By Capt. BRANDRETH, R.E.

Description of barracks at St. Lucia, in Jamaica.

Memorandum with reference to the accompanying sketches of the officers' barracks erected at George Town, Demerara. By Mr. CUMING, R.E.D.

Captain Sandham's mode of curing or improving smoky chimneys; with remarks also on Count Rumford's system, &c.

Notes on concrete. By Capt. Sir W. DENISON, R.E.

On a reflecting level, invented by Lieut.-Col. BUREL, du Corps du Génie. Translated by Capt. YOLLAND, R.E.

Memorandum on paving stables. By Lieut.-Col. ALDERSON, R.E.

Method of taking perspective outlines from nature. By S. B. HOWLETT.

---

121.

## VOLUME III.

In 4to, with several plates and wood-cuts, extra cloth boards, price £1. 5*s*.

CONTENTS.

On the lines thrown up to cover Lisbon in 1810. By Gen. Sir J. T. JONES, Bt.

On the defence of Cadiz, and explanatory details of the position intrenched by the British troops under Lieut.-Gen. GRAHAM, in 1810.

On the model towers approved by Napoleon. By Capt. LAFFAN, R.E.

On the demolition of revetments of some of the old works at Sheerness, 1827.

Letter from Lieut.-Col. R. THOMSON, R.E., on furnaces for heating shot.

Memoir on Posen. By T. K. STAVELEY, Esq., late Captain, R.E.

Report on Beaufort bridge. By Capt. NELSON, R.E.

Sketch of the suspension bridge over the Lahn at Nassau. By the same.

Description of the works on the Rideau canal. By Capt. Sir W. DENISON, R.E.

Mode of bending timber adopted in Prussia. By Capt. NELSON, R.E.

On the coffer-dam used in the construction of the piers of the Alexandria aqueduct. By Capt. TURNBULL.

On the one-arch wooden bridge, of 205 feet span, at Paradenia, across the Mahavillaganga, in the island of Ceylon. By Capt. Oldershaw, R.E.

Description of a series of bridges erected across the river Ottawa, connecting the provinces of Upper and Lower Canada. By Capt. Sir W. Denison, R.E.

On a barometer that requires no corrections either for zero or for temperature. By S. B. Howlett.

Notes to aid in correcting the operation of ascertaining the heights of mountains by means of boiling water; furnished by Lieut.-Col. Ord, R.E.

On the decomposition of metallic iron in salt water, and its reconstruction in a mineral form. By Lieut.-Col. Reid, R.E.

On the effect of climate on Yorkshire paving. By Major-Gen. Fanshawe, R.E.

Report of paving stables at Brighton.

Experiments tried at Quebec as to the properties and adhesive qualities of cements, in November, 1834.

Proof of an earthenware pipe for Lieut. Denison. By Mr. Bramah.

Description of a drawbridge on the London and Birmingham Railway, at Weedon. By Lieut.-Col. Jebb, R.E.

Table of the description and weight of the packages of various articles of traffic. By Lieut.-Col. H. D. Jones, R.E.

Appendix.—Note on Lintz.

---

122.

VOLUME IV.

In 4to, with 30 plates and numerous wood-cuts, extra cloth bds., price £1. 8s.

CONTENTS.

Memoir of the professional life of the late Captain Drummond. By Capt. Larcom, R.E.

Letter from Capt. George Thompson, E.I.C. Engineers, to Col. Pasley, R.E.

Memorandum of the engineer operations at the taking of Ghuznee, in 1839.

Notes on Brixen and Verona in 1838. By T. K. Staveley, Esq., late Capt. R.E.

Notes on shot furnaces. By Captain Nelson, R.E.

Description of a new steam apparatus for drying gunpowder in the Royal laboratory at Woolwich, as proposed by Capt. Caffin, of the R.A.

Memoranda on blasting rock. By Major-Gen. Sir J. F. Burgoyne, K.C.B.

Passage of the Indus. By Lieut. H. M. Durand, B.E.

On lodging troops in fortresses at their alarm posts. By Lieut.-Col. Reid, R.E.

Memoranda relating to the well in Fort Regent, Jersey. By Major Harry D. Jones, R.E.

Notes on the island of Ascension. By Lieut.-Col. H. R. Brandreth, R.E.

On the dam constructed across the waste channel at Long Island, on the Rideau canal. By Lieut.-Col. Bolton, R.E.

Engineer details. By Capt. Nelson, R.E. Principally collected at Bermuda.

On the new victualling establishment at Devonport. By the same. Accompanied by drawings of cast-iron roofs.

Safety-box for connecting a locomotive engine and tender to the train. By S. B. Howlett.

New weigh-bridge in Woolwich Dockyard. By Capt. Sir W. Denison, R.E.

Single coffer-dam across the entrance of the new dock in Woolwich Dockyard. By the same.

Notes on injecting cement or hydraulic lime into leaky joints of masonry. By the same.

*On the employment of sand* for foundations in marshy or soft soil.

Description of the rolling bridge at Fort Regent, Jersey.
Description of the roof of the chapel of the Royal Artillery barracks at Woolwich, showing the failure of the principals, and the mode of restoring them. By Capt. Sir W. DENISON, R.E.
Wharf cranes made by the Butterley Company. By J. GLYNN, F.R.S.
Cast-iron bridge erected over the river Trent, near the confluence of the Trent and Soar, on the line of the Midland Counties Railway.

*** I have printed several over copies of the Memoir of Captain Drummond, out of respect to his memory. Copies may be had, gratis, by any friends of the deceased, or any Officers of the Corps of Royal Engineers; also by the Officers of the Bengal, Bombay, and Madras Engineers.—J. W.

123.

VOLUME V.

In 4to, 60 plates and numerous wood-cuts, extra cloth bds., price £1. 16*s*.

CONTENTS.

Notes on Genoa and Lyons. By T. K. STAVELEY, Esq., late Captain, R.E.
Report on the last 150 miles of the Great Fish river, South Africa. By Capt. NELSON, R.E.
Operations for removing the wreck of the 'Equitable' barque, in the Fultah reach of the river Hooghly. By Captain W. R. FITZGERALD, B.E.
Madras lighthouse. Report of progress in the execution of the new machinery and illuminating apparatus. By Major SMITH, M.E., F.R.S., &c.
Method of illuminating lighthouses, with a description of a reciprocating light. By the same.
New system of fixed lights. By the same.
New hydro-pneumatic lamp. By the same.
Experiments on various woods, both foreign and domestic. By Capt. NELSON, R.E.; the late Capt. YOUNG, R.E.; Sir ROBERT SEPPINGS; Capt. SMYTH, R.E.; and Capt. Sir W. DENISON, R.E.
On the canal navigation of the Canadas. By Lieut.-Col. PHILLPOTS, R.E.
Traversing crane used by the Butterley Company in erecting cast-iron bridges and other public works. By JOSEPH GLYNN, F.R.S.
On the mode of building houses, &c. in the island of Malta. By Lieut.-Col. HARRY D. JONES, R.E.
On drawbridges, from the French of M. DE PONCELET. By Lieut. DOUGLAS GALTON, R.E.
Description of the machinery in operation at the Royal arsenal for the manufacture of leaden bullets by compression. By Capt. Sir W. DENISON, R.E.
Description of a dock lately constructed at Woolwich. By the same.
Description of the machinery employed in Deptford Dockyard for spinning hemp and manufacturing ropes and cables. By Mr. JOHN MIERS, F.L.S.
Theory and practice of sinking Artesian wells. By Lieut.-Col. JEBB, R.E.
On painting timber when exposed to damp. By W. LANDER.
On copying maps and plans. By S. B. HOWLETT.

LIST OF PLATES.

1. Map of Genoa and its environs.
2. Plan of the fortification of Lyons.
3. Details of the operations for removing the wreck of the *Equitable*.
4. Machinery attached to apparatus belonging to the Madras lighthouse.
5, 6. Elevation and section of a new hydro-pneumatic lamp—flag-staff light constructed for the port of Cochin.
7. Sketch of the line of water communication from the fort of Lake Erie to Montreal.
8 to 13. Plan of one of the locks on the St.

Lawrence canal—elevation of one side, and longitudinal section through the centre of the foundation—upper gate, St. Lawrence canal—plan of the iron-work for opening and shutting valve-gates—for adjusting friction roller—for opening and shutting lock-gates.
14, 15. Traversing crane used by the Butterley Company.
16, 17. Details of the mode of building houses in the island of Malta.
18, 19, 20. Details of the construction of drawbridges.
21, 22. Machine for compressing bullets.
23, 24, 25. Eastern dock in Woolwich Dockyard — large sluice, ditto — cast-iron capstan, ditto.
26 to 42. Plans, sections, and details of the machinery employed in Deptford Dockyard for spinning hemp and manufacturing ropes and cables.
43 to 48. Sections, &c. of the Artesian well at the Model Prison, Caledonian Road; with implements, tools, &c.
49 to 60. Plans and sections of works at the island of Ascension.

---

124.

## VOLUME VI.

In 4to, with 62 elaborate and fine plates, and 30 wood-cuts, extra cloth bds., price £1. 16*s*.

CONTENTS.

Notes on the field equipment of the Engineer Department with the Bengal portion of the army of the Indus. By Lieut. DURAND, B.E.
Notes on the defensive works of Jellalabad.
Notes on Acre and some of the coast defences of Syria. By Lieut.-Colonel ALDERSON, R.E.
Report of experiments in blowing in gates, made at Quebec in 1840.
On the reconstruction of the Admiralty sea wall at Haslar Beach, Portsmouth. By Lieut. BEATSON, R.E.
Practical essay on the strength of cast-iron beams, girders, and columns; in which the principles of calculation are exhibited in a plain and popular manner. By WILLIAM TURNBULL.
Hydraulic press for proving girders.
Description of the saw-mills and machinery for raising timber in Chatham Dockyard. By G. D. DEMPSEY, C.E.
Description of a saw-mill used in America.
Description of a wooden swing bridge over the Grenville canal, Canada.
On combining mechanical ventilation with warming by steam heat, as adapted to public buildings. By Mr. SPENCER.
The patent American steam pile-driving machines. By the same.
The American railroads formed on a foundation of piles.
On the method of raising buildings by screws, in Canada and the United States. By T. HOUNSLOW, F.W., R.E.D.
Demolition and removal by blasting of a portion of the Round Down Cliff, near Dover, in 1843. By Capt. HUTCHINSON, R.E.
Experiments on a shot furnace at Malta.
Description of iron roofs. By Captain Sir W. DENISON, R.E.
On the use of fascines in forming foundations to buildings. By Colonel LEWIS, R.E.
Experiments carried on in Woolwich Dockyard, for ascertaining the resistance of brick-work under various conditions.

LIST OF PLATES.

Frontispiece. View of Gaza from Samson's Mount, with the Egyptian encampment.
1. Sapper and Miner tool rack.
*2 to 4. Defensive* works of Jellalabad, environs of ditto, and sections of the fortifications.
5. Plan of St. Jean d'Acre, 1799.
N. W. view of Tiberia and the Sea of

Galilee —View of Caiffa from the anchorage. N. E. view of the Convent, Mount Carmel, and Engineers' encampment.
N. W. view of El Arisch.
View of the beach at Ascalon.
6. Plan of Gaza, &c.
North view of Jaffa from the anchorage.
N. E. view of ditto.
7. Jaffa and its vicinity, 1842.
Acre from the sea, S. W. view, and Acre from Mount Cœur de Lion, east view.
8. Plan of Caiffa.
9. Plan and section of the town and defences of St. Jean d'Acre.
10. Ditto, showing the position of the vessels, &c.
11. Sections of breach, &c., St. Jean d'Acre.
12. Sketch of the barrier gates. Quebec.
13. Sea wall or breakwater at Haslar Beach.
14. Sections and elevations of ditto.
15. Sections of iron girders.
16. Sections of iron girders of 70 and 50 feet dimensions.
17 and 18. Portable hydraulic press for proving cast-iron girders.
19 to 28. Machinery connected with the saw-mills in Chatham Dockyard.
29. Sketch of an American saw-mill.
30. Plan, elevation, and section of the swing bridges on the line of the Grenville canal.
31 to 34. Steam warming and ventilating machinery at the Reform Club-House.
35 to 38. Patent American steam pile-driving machine, with details, &c., &c.
39. New York and Erie pile railroad.
40. Mode of raising buildings in Canada.
41 to 44 and 44*. Round Down Cliff, Dover —sections of face, plan of mines, details of batteries, &c.
45 and 46. Details of furnace for heating shot.
47 to 52. Elevations and plans of iron roofs.

125.

## VOLUME VII.

In 4to, with plates and wood-cuts, extra cloth boards, price £1. 10*s.*

CONTENTS.

Report on the application of forts, towers, and batteries to coast defences and harbours. By Col. Lewis, C.B. R.E.

On the construction and ventilation of prisons. By Lieut.-Col. Jebb, R.E.

On the conducting power of water as applied to submarine explosions by Voltaic electricity, with details of apparatus. By Lieut. Hutchinson, R.E.

Description of the bridge across the Kat River, at Fort Beaufort, Cape of Good Hope. By Capt. Walpole, R.E.

Addition to 'Notes on Acre,' &c. By Lieut.-Col. Alderson, R.E.

Notes on swing or flying bridges. By Capt. Nelson, R.E.

On transition lime and limestone as obtained from different quarries at Plymouth. By Capt. Nelson, R.E.

Description of a suspension bridge erected over the canal in the Regent's Park, upon Mr. Dredge's principle. By Capt. Sir W. Denison, R.E.

Description of the balance gates at the compensation reservoir of the East London Water-works at Old Ford, designed and erected by Thomas Wicksteed, Esq., C.E. By Capt. Sir W. Denison, R.E.

Description of a small observatory erected at Chatham. By Capt. H. D. Harness, R.E.

Experiments carried on at Chatham by the late Lieut. Hope, R.E., on the pressure of earth against revetments, and the best form of retaining-walls.

Account of the failure of a floor in Edinburgh, in 1833. By Lieut.-Col. Thomson, R.E.

The construction of an iron beacon at the Harbour of Black Rock, Connecticut.

Railways. By G. Drysdale Dempsey, C.E.

Mode adopted for repairing and supporting the western retaining-wall of the London and Birmingham extension Railway. By the same.

On the system of drainage of low lands in Holland, the mechanical means employed therein, and the differences of cost, &c. By G. W. Hughes, C.E., United States' Army.

APPENDIX.

Addenda to the account of the operations at the Round Down Cliff, Dover, inserted in the sixth volume. By Capt. Hutchinson, R.E.

On the means of preventing damp in walls.
Experiments on an open cast-iron girder.
Notes and experiments on iron girders.
Experiment performed at Bricklayers' Arms Station, South Eastern Railway.
On the condensation of gravel and sand. By Lieut.-Col. THOMSON, R.E.
Experiment on the strength of the principals of a wrought-iron roof.
Memorandum on the use of asphalte in covering casemates.

126.

VOLUME VIII.

In 4to, with plates and wood-cuts, extra cloth boards, price £1. 10s.

CONTENTS.

Destruction of bridges on the Shannon. By Lieut.-Col. H. D. JONES, R.E.
Notes on platforms. By Lieut.-Col. PORTLOCK, R.E., F.R.S., &c.
On siege gun and mortar platforms. By Lieut.-Col. ALDERSON, R.E.
On the superior slopes of parapets. By Lieut.-Col. PORTLOCK, R.E.
Loopholed barrack, intended as a keep for a square fort. By Capt. FARIS, R.E.
Machinery used in the manufacture of cannon at the Royal Arsenal, Woolwich.
Coffer-dam constructed in Devonport Dockyard. By Capt. BURGMAN, R.E.
Nasmyth's patent steam hammer.
——— patent steam pile-driving machine.
Failure of the masonry at Fort Neuf. By Lieut.-Col. THOMSON, R.E.
Horizontal loopholes. By Lieut.-Col. ALDERSON, R.E.
Horizontal loophole and loopholed window, proposed by Lieut.-Col. ORD, R.E.
Mode of constructing a breakwater, and of stopping the movement of shingle on the sea coast. By Lieut.-Col. YULE, R.E.
Railways. By G. DRYSDALE DEMPSEY, C.E.
Journal of practical operations in mining, at Chatham, in 1844; with an Appendix by Lieut. PENRICE, R.E.
Survey of a line for a canal to unite the Bay of Fundy with the Gulf of St. Lawrence. By Capt. CRAWLEY, R.E.
Method of reclaiming the Tantamar and adjoining marshes from the sea. By Capt. CRAWLEY, R.E.
Description of an engraved protractor. By S. B. HOWLETT.
*General Index to the First Seven Volumes.*

127.

VOLUME IX.

In 4to, with plates and wood-cuts, extra cloth boards, price £1. 16s.

CONTENTS.

On the value of fortresses, intrenched camps, and field fortresses (places du moment); their application to the present system of railroads for the protection of the Metropolis south of the Thames; including some notices on the works at Lyons and Paris. By Col. LEWIS, C.B., R.E.
Account of the battle of Meeânee, with a plan. By Lieut.-Col. WADDINGTON.
Project of defence. By Capt. BAINBRIGGE, R.E.
Draw-bridges at Bermuda.
Description of wrought-iron roofs erected over two building slips in the Royal Dockyard at Pembroke. By Capt. M. WILLIAMS, R.E.
Iron roofs erected over building slips in Portsmouth Dockyard.
Description of a water-course, wharf, and water-wheel, erected at Waltham Abbey, Essex, in 1845, with the mode of construction. Communicated by *Capt. CRAWLEY, R.E.*

Description of a large chimney for conveying the smoke from the various buildings connected with the steam machinery factory in Woolwich Dock-yard.

On the destruction of the bridge at Carrick on Shannon by gunpowder, 1845. By Lieut.-Col. H. D. JONES, R.E.

Memorandum on the alterations made in a cast-iron pump at the Jesuits' Barracks, Quebec, to enable it to resist the action of frost. By Capt. STEHELIN, R.E.

The taper chain tension bridge at Ballee Khâl, near Calcutta, in its renewed form, after the failure in 1845. By Major GOODWYN, E.I.C.E.

Statement of the proof to which the bridge was publicly subjected.

Report of the method adopted in slinging and fastening the several chains, rods, beams, and other iron-work.

Report of the Committee assembled to investigate the cause of the fall of the bridge.

Appendix to the preceding Report.

Copy of a letter from Major GOODWYN to Major GREENE.

Extract of a letter from Major GOODWYN.

Formulæ for a suspension bridge: links of any length and weight.

On suspension bridges. By Capt. HARNESS, R.E.

On embrasures. By Lieut. PENRICE, R.E.

Railways. By G. DRYSDALE DEMPSEY, C.E.

---

128.

## VOLUME X.

**In 4to, with 85 plates and illustrative wood-cuts, extra cloth boards, price £1. 10s.**

CONTENTS.

Memoir of the professional life of the late Lieut.-Col. BRANDRETH, R.E. By Col. LEWIS, C.B., R.E.

On the defence of the country south of London; a sequel to the first article in the 9th volume. By the same. With a plan.

Report on the 'Great Britain' steamer, ordered by the House of Commons to be printed, 16th July, 1847. By Capt. WILLIAMS, R.E.

Explanation of the battle of Meeânee. By Major-General Sir WILLIAM NAPIER, K.C.B.

The doctrines of carpentry examined, in their application to the construction of a roof. By Lieut.-Col. CHARLES WADDINGTON, C.B., of the Bombay Engineers.

Description of the mat covering sheds used at Hong-Kong in the erection of the Ordnance buildings, and of the mode adopted by the Chinese in transporting and raising heavy weights for these buildings. By Major ALDRICH, R.E.

Campaign on the Sutlej, 1845–6. By Colonel LEWIS, C.B., R.E. With unpublished dispatches of Lieut.-General Sir HARRY SMITH, G.C.B.; and some account of the passage of the Sutlej by the British army, in February, 1846, by Captain YULE, Bengal Engineers.

Mode of closing windows at Pisa. By Lieut.-Colonel P. YULE, R.E.

A resultant system for the construction of iron tension bridges. By Major HENRY GOODWYN, Bengal Engineers.

APPENDIX.—I. Memoir on the quantity of iron necessary in a tension chain bridge. By the Rev. H. PRATT.

APPENDIX II. Return of properties in cultivation at St. Lucia, indicated by the numbers on the map of the island.

LIST OF PLATES.

1. Map of the country south of London, to explain Colonel Lewis's Paper on the System of Defence.
2 and 3. Elevation and plan of the break-water formed for the protection of the *Great Britain* steam ship while on the sands near Dundrum, Ireland.
4 and 5. Mode of carrying granite columns and raising weights by manual labour in Hong-Kong, as adopted in the erection of the Ordnance buildings at that station.
6. Position of the British army on the Sutlej, January 19th, 1846.
7. Plan of the battle of Ferozeshah, on the 21st and 22nd December, 1845.
8. Plan of the battle of Aliwal, on the 28th January, 1846.
9. Plan of the battle of Sabraon, on the 10th February, 1846.
10, 11, and 12. Plans to explain the passage of the Sutlej by the British army, 10th and 11th February, 1846; and elevations and sections of the boats forming the pontoons.
13. Double bridge across the Sutlej, at Nuggur, in March, 1846.
14. Wreck of the Brighton chain pier, as seen October 16, 1833.
15. Sketches illustrative of three experiments undertaken to test the taper chain resultant system of iron suspension bridges; with
    1. General elevation of the taper chain tension bridge on the 'resultant' system proposed to be erected over the Jumna, at Agra.
    2. Section through abutment and toll-house, plans and details.
    3. Bird's-eye view of half-chain—front view of oblique rods, &c.—detailed elevation curve, &c., &c., &c.
    4, 5. Sections, details, &c.

Topographical map of St. Lucia, executed by order of Lieut.-Col. REID, R.E., late Governor in Chief of the Windward Islands, &c., &c., &c.
With others engraved on wood.

## MILITARY WORKS.

129.

In royal 8vo, Parts I. II. III. IV. & V., with near 400 engravings and wood-cuts, price £3. 16*s*.

## AIDE-MÉMOIRE TO THE MILITARY SCIENCES,

### FOR THE USE OF THE CORPS OF ROYAL ENGINEERS AND THE EAST INDIA COMPANY'S FORCES.

Colonel Lewis, R.E., during forty years of constant employment in three parts of the globe, has observed the want of an Aide-Mémoire, or memoranda of reference, when far from practical works and practical men.

In the course of long services, the Engineer is at one time employed in the field,—in the attack and defence of places,—in the construction of works and bridges; at other times, in the colonies and remote stations; and, being perhaps the only professional person present, is called upon to furnish plans and estimates for the execution of civil and military buildings,—for canals, railroads, &c.

If this is the common routine of an Engineer Officer's duty, is he prepared to meet all emergencies? and can he find a library of reference in a few volumes to afford the desirable assistance to memory?

Thus far this has not been possible. Colonel Lewis has therefore proposed to have this want supplied by the united exertions of the whole Corps of Royal Engineers and by those of the East India Company's Service, whose duties are as varied in climate as in their nature.

The term 'Aide-Mémoire' is selected as not involving the Editors and Contributors in the necessity of giving complete treatises, as implied by the words Encyclopædia, Dictionary, and Manual.

*Part VI.*, completing the work, is in a forward state.

130.

In 3 vols. 8vo, with 26 elaborate plates, cloth boards, price £2. 2*s*.

Third edition, enlarged and edited by Lieut.-Col. HARRY D. JONES, R.E.

## JOURNAL OF THE SIEGES

carried on by the army under the Duke of Wellington in SPAIN, between the years 1811 and 1814, with an account of the LINES of TORRES VEDRAS.

By Major-Gen. Sir JOHN T. JONES, Bart., K.C.B.

131.

In 1 vol. royal 8vo, price 7*s*. 6*d*. in boards.

AN ESSAY ON

## THE MODERN SYSTEM OF FORTIFICATION

adopted on the Rhine and Danube, and followed in all the works constructed since the Peace of 1815, in Germany. Illustrated by a copious Memoir on the Fortress of Coblentz, and accompanied by beautiful plans and sections of the works of that place.

By Lieutenant-Colonel J. H. HUMFREY, K.S.F.,

Formerly of the Royal Artillery and Royal Staff Corps, and late Commanding Engineer to the Corps of Cantabria, Author of several Military Works, &c. Long resident in Germany, where he had opportunities of collecting information from the best sources.

132.

In 1 vol. small 8vo, in boards, price 5*s*.

AN ELEMENTARY TREATISE ON

## ARTILLERY AND INFANTRY,

adapted to the service of the United States, designed for the use of Cadets of the U. S. Military Academy, and for Officers of the Independent Companies of Volunteers and Militia.

By C. P. KINGSBURY.

### ARCHITECTURE.

### Archæology, Coloured Works on Decorative Art, Stained Glass, Ecclesiastical and Interior Decoration, &c.

133.

## RICHLY PAINTED AND STAINED GLASS WINDOWS,

AND HIGHLY WROUGHT

## ECCLESIASTICAL DECORATION.

In two volumes, imperial folio, elegantly bound, price £10. 10*s*.

## DIVERS WORKS OF EARLY MASTERS IN CHRISTIAN DECORATION:

with an Introduction containing the biography, journal of travel, and contemporaneous associations in art, of ALBERT DURER, notices of his master WOHLGEMUTH and his friend PIRCKHEYMER; ADAM KRAFFT, and his Sacrament-House at Nuremburg; with some English examples of painted

and stained glass of an earlier date; the ancient Church and Sacrament-House at Limbourg: the works of DIRK and WOUTER CRABETH, &c. Also a succinct account, with illustrations, of painted and stained glass at Gouda, in Holland, and the Church of St. Jacques at Liége.

This work embraces, principally, a period of art original and profound in its character: its design is of the highest grandeur and achievement of legendary art, especially inspiring veneration in its development and in the Decoration of Christian devotedness; uniting also a profusion of examples alike applicable both for Domestic and Ecclesiastical uses. At the present time, when the requirements are manifested by an ardent search for truly ancient data, this Work opens to all that is desired by its practical application of bold, massive, enriched, and minute design.

ALBERT DURER, ADAM KRAFFT, and the CRABETHS, pre-eminent in their art, were founders, each in their school, coeval with and subsequently to the ages of Maximilian and Charles the Fifth,—periods rich in the birth of art which spread its kindred genius in Germany, Italy, and the Low Countries. Of the first, his life, his journeying, his attachment to Luther and the dawning age of religious toleration, adding a critical examination of his numerous works, are for the first time fully portrayed, with some admirable vignette illustrations: of the second, the celebrated Sacrament-hauschen at Nuremburg, with a beautiful engraving of the same by Mr. John Le Keux: of the third, the biographical account of these extraordinary men, with a critical notice of the Windows in the Church of St. John at Gouda, and some magnificent coloured illustrations of the same: of the Painted Ceilings and Decorations of St. Jacques at Liége, together with the extraordinary examples of Glass-Painting, brilliant in colour and sublime in effect; complete and comprehensive; forming most important subject matter of these volumes, to which are added some English examples, forming and contrasting a comparative display of Glass-Painting of early and later times.

The work, which is bound elegantly, has been honoured by the highest patronage, and by the periodical and artistic press.

"We do not perhaps enough estimate the assistance which was once given both to purpose and perception by the feeling of wonder which with us is destroyed, partly by the ceaseless calls upon it, partly by our habit of either discovering or anticipating a reason for every thing. Of the simplicity and ready surprise of heart which supported the spirit of the older painters, an interesting example is seen in the Diary of Albert Durer, lately published in a work every way valuable, but especially so in the carefulness and richness of its illustrations, 'Divers Works of Early Masters in Christian Decoration,' edited by John Weale, London, 2 vols. folio, 1846."—*Quarterly Review*, 1847.

---

134.

In 4 vols., complete, medium 4to, in cloth boards, with about 500 wood, steel, and copper engravings, many of which are highly and expensively coloured, price £6. 6*s*.; or £7. 17*s*. 6*d*. in half-morocco, gilt leaves.

## QUARTERLY PAPERS ON ARCHITECTURE, &c.

UNDER THE FOLLOWING HEADS.

| | |
|---|---|
| Ancient Timber Roofs. | Heraldry. |
| Antiquities. | Interior Decorations. |
| Archæology. | Italian Church Plate. |
| Architecture. | Painted and Stained Glass. |
| Gothic Architecture. | Polychromy. |
| Ecclesiastical Architecture. | Symbolic Colours. |
| Encaustic Tiles. | Art of Staining Glass. |
| *Essays.* | Monograms. |

These volumes, when arranged, are bound in the following order:

CONTENTS OF VOL. I.

Essay on those powers of mind which have reference to architectural study and design. By GEO. MOORE, F.R.S., &c.
Life of the late William V. Morrison, of Dublin, architect.
Architecture in and about St. Omer. By the Rev. A. SUCKLING, LL.B.
Primitive churches of Norway.
On the pointed style of architecture in Belgium. By M. A. G. B. SCHAYES: translated by Henry Austin, architect.
On the present condition and prospects of architecture in England. By GEO. WIGHTWICK, architect.
Ancient English gothic architecture. By the same.
Modern English gothic architecture. By the same.
Outlines and characteristics of different architectural styles. By W. H. LEEDS.
On the Hall of the Middle Temple. By EDWARD SMIRKE, Esq., F.S.A., &c.
Review of the publications of the Oxford Architectural Society.

CONTENTS OF VOL. II.

The Temple church. By SYDNEY SMIRKE, architect, F.S.A., F.G.S.
Church of St. Margaret, Stoke-Golding. By T. L. WALKER, architect.
Church of St. James at Liége. By the EDITOR.
Beaulieu Abbey, Hants. By O. B. CARTER, architect.
Penton Meusey church, Hants. By the same.
Headbourn Worthy church. By the same.
Bishopstone church, Wilts. By the same.
Collegiate church of All Saints, Maidstone. By J. WHICHCORD, jun., architect.
On the polychromatic decoration of the middle ages. By the same.
Church of the Holy Cross, Binstead, Isle of Wight. By J. R. WITHERS, arch$^{t}$.
Ancient basilicæ, church of San Clemente, Rome. By R. W. MYLNE, arch$^{t}$.

CONTENTS OF VOL. III.

An ancient crucifix.
On desecration.
The Suckling Papers.
Churches, geneaology, heraldry, and architecture of the county of Essex. By the Rev. A. SUCKLING, LL.B.
On symbolic colours, in three sections. By WILLIAM INMAN, architect.
On stone used for building, particularly that for the new Houses of Parliament. By C. H. SMITH, sculptor.
Examples of ecclesiastical perpendicular roofs. By HENRY CLUTTON, architect.
Encaustic tiles, examples remaining in St. Marie's Abbey, Beaulieu.
Rood loft, Compton Basset church, Wilts.

CONTENTS OF VOL. IV.

Mary, Queen of England, and her consort, Philip II. of Spain.
Account of the painted glass windows of the church of Gouda in Holland.
Art of painting on glass. By Dr. M. A. GESSERT.
Selections of painted and stained glass from York. By Messrs. BELL and GOULD, architects, York.
Account of painted and stained glass in West Wickham church, Kent. By JOHN G. WALLER.
Painted or stained glass from Winchester cathedral. By O. B. CARTER.
The art of painting on glass. By E. O. FROMBERG.
Artistic ecclesiastical decoration. By John W. PAPWORTH, architect.

Ornamented and illuminated letters and miniatures of the fourteenth century. Monograms, old architectural ornament, &c.

The greater portion of these Papers have richly engraved and ornamental and coloured plates, immediately following the papers to which they have relation, and in the binding of the perfect copies it has been necessary to adopt a more classified arrangement than could be done in the publication of the work as issued in parts. Subscribers who still retain their copies unbound will find their advantage in confiding the same to the Editor for binding.

135.

In 1 vol. imperial 4to, half-bound in morocco, price £1. 1*s*.

## REMAINS OF ECCLESIASTICAL WOOD-WORK,

Measured and drawn on the spot by T. TALBOT BURY, Architect.

LIST OF PLATES.

1. Stalls and book-board in Bridgewater church.
2. Seats in Westonzoyland church, Somersetshire.
3. Stalls in Wantage church, Berkshire.
4. Seats in Bishop's Lydeard church, Somersetshire.
5. Stalls in Swinbrook church, Oxfordshire, and Cobham church, Kent.
6. Seats, &c., St. Mary's, Bury St. Edmund's.
7. Stalls in Lavenham church, Suffolk.
8. Screen on the south side of the chancel, Lavenham church.
9. Screen at the end of the north aisle, Lavenham church.
10. Screen, Northfleet church, Kent.
11. Screen in the north aisle, St. Andrew's, Brigstock, Northamptonshire.
12. Screen in the north aisle, St. John's, Aldenham, Hertfordshire.
13. Chancel screen, St. Peter's, Berkhampstead, Hertfordshire.
14. Screens in Lavenham church, Suffolk.
15. Roofs in ditto.
16. Roofs in Burford church, Oxfordshire.
17. Roofs in Wantage church, Berkshire.
18. Roof of the nave, St. Mary's, Bury St. Edmund's.
19. Ditto, St. Mary, Westonzoyland.
20. Pulpits in Bridgewater church, Somersetshire, and Swinbrook church, Oxfordshire.
21. Ornamental engraved title-page.

A very few copies on India paper proofs, very neat in half morocco, price £1. 11*s*. 6*d*.

136.

In imperial 4to, very neatly half-bound in morocco, with 20 beautifully coloured and illuminated plates, price £1. 5*s*.

## ALPHABETS, MONOGRAMS, OLD ARCHITECTURAL ORNAMENT, SACRED ILLUSTRATIONS, BORDERS,

COLLECTED ON THE CONTINENT AND IN ENGLAND.

1. Miniature & border, from an original MS.
2. Ornamental lettered title-page.
3. Capitals and letters of the 14th and 15th centuries.
4. Capital letters of the 14th century.
5. Capital letters and sacred writing and music of the 14th century.
6. Monogram, singular and ornamental.
7. Ditto. do. do.
8. Illuminated alphabets of the 14th century.
9. Large illuminated capital letters of do.
10. Illuminated alphabets of the date 1500.
11. Singular ornamental capital letters from Baptiste Fulgosi, 1518.
12. Large capital letters illuminated, of the 14th century.
13. Capital letters of do.
14. German ornamental letters.
15. Alphabets of the 14th century.
16. Alphabets of 1512 date.
17. Letters of Albert Durer, 1500.
18. Grotesque letters, 1512.
19. Ornamental old book covers, 16th century.
20. Ditto. do.

*The plates* all vary in design and grotesqueness.

137.

**NEW FRENCH WORK**

ON THE

## ARCHITECTURE OF THE MIDDLE AGES,

FROM

THE FIFTH TO THE SIXTEENTH CENTURIES,

and the Arts dependent upon it, Sculpture, Mural Painting, Mosaics, Glass Painting, Iron Work, &c., from unpublished drawings of the principal Architects of France and other countries. By JULES GAILHABAUD.

The design of the work will be also to form a noble collection of Examples of the numerous public and private edifices of the time, in the various styles of Art, from the magnificent cathedral, to the delicate sculpture which may enrich the simplest dwelling; and from the gorgeous colours of the painted window, to furniture and ornamental iron-work.

The work may be considered both as an Encyclopædia of Architecture, and at the same time a choice selection of models for the practical use of Architects, Painters, and Sculptors; while Examples in the subsidiary branches connected with Architecture, present facilities for artistic study in Mural Painting, Mosaic, Carving, Ornamental Iron-work, and Bronze.

The Drawings are by the most able Architects, so that the monuments may be reproduced with scrupulous exactness; and to accomplish this object still further, the chief edifices in each country have been drawn by native artists, with the view to their characteristic details being more faithfully delineated, and in this respect have secured the hearty concurrence of the most eminent artists in the various countries of Europe.

TERMS OF SUBSCRIPTION.

The work will form from 150 to 200 Parts, in royal 4to, and will appear every fortnight. Each Part will contain two engravings, or one coloured plate, and will be accompanied by Historical and Archæological Notices, forming a series of Monographs, of which the whole collection will be composed. Parts I. to X. are already issued.

The price of each Part is 2*s.*, or, on India paper, 2*s.* 6*d.*

---

138.

## DESIGNS FOR SEPULCHRAL MONUMENTS.

By A. F. SPRAGUE, Architect.

The existence of a Work upon this subject has long been a desideratum, and it is presumed that, in offering to the public a series of original designs in Monumental Architecture, it will be received as an effort to guide the taste to the choice of more suitable erections than have been usually dedicated to the memory of the departed, and to lead to the exclusion of such memorials as must ever be looked upon as unworthy the object for which they were erected, from the painful incongruities they present, as regards their association with the venerated edifices wherein they are introduced.

It is a well-known fact that, in the erection of mortuary monuments, a lamentable absence of propriety has been generally displayed, as is abundantly exemplified in almost every church and church-yard throughout the kingdom;

and, although the want of a work upon the subject has long been felt, no publication has hitherto appeared which has been found sufficiently practical.

The work is intended to be of a comprehensive character, and will comprise designs calculated to meet the views of persons of all religious denominations, and various degrees of expenditure, consisting of Tombs, Mural Tablets, Head Stones, Grave Crosses, and Floor Slabs,—in some of which, forms for inscriptions will be introduced, in order to show their proper positions upon the monument.

To the Reverend the Parochial Clergy it is respectfully submitted that an appropriate work, upon a subject so sacred and important, can hardly fail to prove a desirable acquisition, as an authority to guide in the future introduction of sepulchral memorials into the edifices over which they preside.

The work will be comprised in Ten Parts, and issued Monthly; each Part containing five quarto plates, price 2*s.* 6*d.* The work, when completed, and appropriately bound in cloth, will be charged £1. 7*s.* 6*d.*, and to non-subscribers £1. 10*s.*

---

139.

A Drawing Book for Students in Architecture, Civil Engineering, and Mechanics. In folio, with 30 plates, bound in cloth, accompanied by a descriptive Text in 12mo, price 16*s.*

A SERIES OF INSTRUCTIVE EXAMPLES

IN

## ARCHITECTURAL, ENGINEERING, AND MECHANICAL DRAWING.

illustrated by 30 large folio Engravings of recently constructed Works in ENGLAND, with explanatory Details, Sectional Parts, &c., selected as an Elementary and Practical Introduction to the Professional Student in the commencement of his career; also recommendatory for Tuition at the Architectural and Engineering Classes at King's College, College for Civil Engineers, Durham College, Glasgow College, and the various Scientific Schools now establishing in different parts of England.

LIST OF PLATES.

ARCHITECTURE.

1. The five orders of Architecture, viz., Parthenon at Athens, Erectheus at Athens, Jupiter Stator at Rome, Palladio's Tuscan order, and the Composite from the Baths of Diocletian at Rome, drawn with measures and names of parts.
2. Their entablatures, drawn with measures and names of parts.
3. Plan, elevation, and section of the National School, Tottenham, with very full dimensions.
4. Front elevation of the United States Bank, Philadelphia, drawn to a scale.
5. Longitudinal section of do., drawn to a scale.
6. Ground plan of do., drawn to a scale.

CIVIL ENGINEERING.

7. Weir for Bromley Mill, general plan, plan of grating, transverse section, dimensions.
8. Elevation and plan of Newport Road Bridge across feeder of Bute Ship Canal, Cardiff, with dimensions and names of parts.
9. Cross and longitudinal sections, with plan of culvert for conveying the feeder under Glamorganshire Canal and Merthyr Road, with dimensions.
10. Overfall at the north-west corner of Cardiff Castle; plan, elevation, transverse section, &c., with dimensions and names of parts.
11. Transverse section of the Tunnel on the Thames and Medway Canal, with centres and dimensions, and names of parts.

12. St. Katherine Docks, forms of piles, iron shoes for coffer-dam, dimensions.
13. Horncastle Tunnel, section of tunnel and elevation of centre, section of bridging, section of tunnel through the centre of a standard and bearer of the hauling-path, longitudinal section and elevation of towing-path, plan of the upper part of the towing-path, &c., with numerous dimensions and names of parts.
14. Communication lock of do., with several instructive details, with dimensions and names of parts.
15. Taff Vale Railway culverts, several dimensions, and names of parts.
16. Tunnel on the London and Birmingham Railway, sections, plans, &c., with dimensions.
17. Telford's timber turn bridge on the Grand Surrey Canal, plan and elevation, screw jacks, double lever, &c., with dimensions and names of parts.
18. Pug Mill, plan and elevation, elevation of burrow, details and dimensions.
19, 20. Plans for parish and district surveying, hills in capital letters, &c. Plan and section of part of the London and York Railway, cross and longitudinal sections for railway plan drawing, with dimensions and names of parts.

MECHANICAL ENGINEERING.

21. Mode of drawing spiral screws, elevation of machine worked by an eccentric for cutting holes in metal plates, elevation of the governor of a steam engine, elevation and plan of endless engine chain.
22. Male and female screws, with sections and plans.
23. Method of drawing toothed wheels, method of drawing head toothed wheels, elevations, plans of pinions, &c.
24. Method of drawing bevelled toothed wheels, edge view, plan of pinion, &c.
25. Bevelled gear wheels, plan view, oblique view, edge view, &c.
26. Projection of toothed wheels, plan view, edge view, oblique view, &c.
27. Crabs for raising heavy weights, end elevations and side elevations.
28. Iron works, plan and elevation of machinery for rolling bar iron, plan and elevation of tilt hammer, section of puddling furnace, plan and elevation of puddling furnace, and machine for slitting, with references to parts.
29. Gothic, Tudor, and Elizabethan capital letters, with numerals.
30. Various styles of letters for writing on engineering plans, as shown in the title.

---

140.

In 4to, boards, price 4*s*.

## THE ART OF PAINTING ON GLASS, OR GLASS STAINING;

comprising full and complete directions for preparing the necessary pigments and fluxes; for laying them upon the glass; and for the process of fixing or burning the colours in: with descriptions of the furnaces and apparatus required for the various operations.

By Dr. M. A. GESSERT, Author of the 'History of Glass Painting.'

Translated from the German by Wm. Pole, F.R.A.S.. F.G.S., Assoc. Inst. C.E.

---

141.

In large 4to, neatly half-bound and lettered, price £1. 11*s*. 6*d*.

THE ARCHITECTURAL HISTORY AND ARCHITECTURAL ORNAMENT, EMBELLISHMENTS, AND PAINTED GLASS, OF

## THE TEMPLE CHURCH, LONDON;

consisting of 30 very elaborately drawn engravings, many of which are highly coloured and produced by Mr. Owen Jones, &c., in the best style of art; drawn from admeasurements; and with descriptive text by Sydney Smirke, Architect.

ILLUSTRATIONS.

The stained glass windows, E. end, and of the N. and S. aisles, in colours, fac-simile.

The stained glass E. window of tower, in colours, fac-simile.

Decorations of ceiling, in colours, fac-simile.
Plan of the ceiling.
Decorations of the spandrils, in colours, fac-simile.
Altar, in colours, and in beautiful fac-simile.
Decorations of archways, in colours, do.
Compartments of inforium.
Carved oak elbows to seats.
West end of Benchers' seats.
Details, capitals, columns, bases, &c., &c.
Plan of the whole structure, engraved by Le Keux.

A few copies on large and imperial size, extra half-binding, £2. 12*s.* 6*d.*

142.

In 4to, with 28 plates, highly wrought in colours, £1. 16*s.* half-morocco.

## STAINED OR PAINTED GLASS OF WINCHESTER CATHEDRAL:

the antiquities of Winchester Cathedral, in respect only to its magnificent stained or painted glass, the richest and best selection, made by OWEN B. CARTER, Architect, Winchester. The engravings all in fac-simile, and highly coloured, embracing some of the finest examples extant of this admired art.

143.

In 4to, with 10 plates, and wood-cuts, in fac-simile, 5*s.*

## STAINED GLASS OF CANTERBURY CATHEDRAL;

AND

## FRAGMENTS TOWARD THE HISTORY OF STAINED GLASS AND THE SISTER ARTS OF THE MIDDLE AGES.

144.

In 4to, with 6 plates, in cloth boards, price 7*s.* 6*d.*

AN HISTORICAL ACCOUNT OF THE

## CHURCH OF ST. MARGARET, STOKE-GOLDING,

LEICESTERSHIRE.

145.

Price 4*s.* 6*d.* in extra style of binding; in a sheet, 3*s.* 6*d.*

## A CHART OF ANGLICAN CHURCH ORNAMENT;

wherein are figured the Saints of the English calendar, with their appropriate emblems; the different styles of stained glass; and various sacred symbols and ornaments used in churches.

The stained glass in beautiful fac-simile.

146.

With 18 elaborate engravings by Mr. John Le Keux; price 10*s.* 6*d.* half-bound; India proofs, large paper, 18*s.*

THE ARCHITECTURAL HISTORY AND ANTIQUITIES OF

## THE CHURCH AT BISHOPSTONE, WILTSHIRE.

147.

By the same author, uniform with the above, price 4*s.*; in a sheet 3*s.*

EXAMPLES OF

## ANCIENT DOORWAYS AND WINDOWS;

arranged to illustrate the different styles of Gothic architecture, from the Conquest to the Reformation.

It has been the aim of the author of this little chart to present such examples as may most clearly illustrate the successive changes in style, together with a few remarks on the characteristic peculiarities which marked each period. The names of the buildings from which the examples are selected are in all cases given.

---

148.

In 4to, with 5 engravings, 7*s.* 6*d.* sewed in a wrapper, (only a very few copies printed,)

## MODERN ENGLISH GOTHIC ARCHITECTURE.

---

149.

With 13 fine and very elaborate engravings, some of which are coloured, price 10*s.* 6*d.* half-bound; India proofs, large paper, 18*s.*

THE ARCHITECTURAL HISTORY AND ANTIQUITIES OF

## THE COLLEGIATE CHURCH OF ALL SAINTS, MAIDSTONE;

with an essay on the polychromatic decoration of the early and middle ages.

---

150.

In 1 vol. imperial 4to, with 20 fine plates, neatly half-bd. in calf, price £1. 5*s.*

STUDIES OF

## ANCIENT DOMESTIC ARCHITECTURE;

principally selected from original drawings in the collection of the late Sir William Burrell, Bart.; with observations on the application of ancient architecture to the pictorial composition of modern edifices.

LIST OF PLATES.

1. Passingworth, in Waldon.
2. Chequers Court, Bucks.
3. Ote Hall, Sussex.
4. Tanners, in Waldon, Sussex.
5. West front of Riverhall, Sussex.
6. Harrold, Bedfordshire.
7. Yaverland, Isle of Wight.
8. West front of Plumpton Place, Sussex.
9. Packshill, Sussex.
10. Ewehurst, Sussex.
11. Drenswick Place, Sussex.
12. Hammond's Place, Sussex.
13. N. E. View of Brandeston Hall, Suffolk.
14. E. View of Derm Place, Horsham, Sussex.
15. Mr. Clutton's, Cuckfield, Sussex.
16. Seddlescomb or Selcombe Place, Sussex.
17. At Lincoln.
18. Cookham Tower, Sussex.
19. At Lincoln.
20. West Gate, Peterborough.

151.

In 4to, with 66 fine illustrations in wood-cuts and plates, some of which are coloured, vol. 1 complete in boards, leather backs, price £2. 2*s*.

MEMORIALS OF THE

## ANTIQUITIES OF THE COUNTY OF SUFFOLK;

or, Historical, Genealogical, and Architectural Notices of the towns and villages; comprising the Hundreds of Wangford, Mutford, and Lothingland.

By the Rev. ALFRED SUCKLING, LL.B.,
Rural Dean, Rector of Barsham, and Member of the Archæological Institute of Great Britain and Ireland.

Only a very few copies printed on large paper, price £2. 12*s*. 6*d*.

---

152.

In imperial folio, highly-finished lithographed engravings, price in half-morocco £2. 12*s*. 6*d*., with descriptive text in 8vo, to accompany.

ILLUSTRATIONS OF

## THE ROCK-CUT TEMPLES OF INDIA;

designed to illustrate the architecture of the Buddhist and Brahminical caves and monoliths, from the earliest to the latest periods at which such works were executed in India.

By JAMES FERGUSSON, Esq., F.R.A.S. and F.R.G.S.

---

153.

REVIVED ITALIAN.

In large 4to, very neat half-morocco, gilt tops, price 18*s*.

STUDIES OF

## MODERN ENGLISH ARCHITECTURE.

THE TRAVELLERS' CLUB-HOUSE.

By CHARLES BARRY, Architect.

Illustrated by engravings of plans, sections, elevations, and details,

by J. H. Le Keux;

With an Essay, including a description of the building, by W. H. Leeds.

LIST OF PLATES.

1. Ground plan of the building.
2. Principal plan.
3, 4. Front and back elevations.
5. Longitudinal section through A to B.
6. Longitudinal section through C to D.
7. Details of the principal front: windows, ground floor, section of cornice of window head, of under part of window, of ornament in string-course, elevation of console, balustrade to area front.
8. Details of the principal front: section of *principal cornice*, elevation of cornice, plaster cap and entablature to window, elevation of one-pair window, elevation of cornice, &c.
9. Details of rear front: elevation of one-pair window, section of window head, elevation of block and cornice, section of principal cornice, section of window cornice, &c.
10. Details of drawing: plan of ceiling, bead, section of cove of ceiling, enriched panel of ceiling, section of cornice, chimney-piece, &c.

154.

In 1 vol. imperial 8vo, with fine plates, extra cloth boards, price 16*s.*; or in elegant half-morocco, price 20*s.*

AN ESSAY ON

## THE ANCIENT TOPOGRAPHY OF JERUSALEM;

with restored plans of the Temple, &c., and plans, sections, and details of the church built by Constantine the Great over the Holy Sepulchre, now known as the Mosque of Omar, and other illustrations.

By JAMES FERGUSSON, F.R.A.S. and F.R.G.S.,
Author of the 'Illustrations of the Rock-Cut Temples of India,' and 'Picturesque Illustrations of Ancient Architecture in Hindostan.'

---

155.

In 4to, very neat in half-morocco, with about 130 illustrations on wood and copper, price 15*s.*

THE TRUE PRINCIPLES OF

## POINTED OR CHRISTIAN ARCHITECTURE.

By A. WELBY PUGIN, ARCHITECT,
AND PROFESSOR OF ECCLESIASTICAL ANTIQUITIES AT ST. MARIE'S, OSCOTT.

The following important facts are fully explained in this work.

1. That all the ornaments of pure pointed edifices were merely introduced as decorations to the essential constructions of those buildings.
2. That the construction of pointed architecture was varied to accord with *the properties of the various materials employed*, shown by ancient examples of stone, timber, and metal construction.
3. That no features were introduced in the ancient pointed edifices, which were not *essential either for convenience or propriety.*
4. That pointed architecture is most consistent, as it *decorates the useful portions of buildings instead of concealing or disguising them.*
5. That true principles of architectural proportion are found only in pointed edifices.
6. That the defects of modern architecture are principally owing to *the departure from ancient consistent principles.*

---

156.

Illustrated with 10 plates, and uniform in size with the 'True Principles of Pointed or Christian Architecture,' as a companion to the above, half-bound in morocco, gilt leaves, price 10*s.* 6*d.*

AN APOLOGY FOR THE REVIVAL

OF

## CHRISTIAN ARCHITECTURE IN ENGLAND.

By A. WELBY PUGIN, Architect.

In this treatise the following matters are set forth:

1. The inconsistencies of modern English architecture, with critical remarks on several structures recently erected.

2. Christian architecture defended against several objections.
3. The inconsistency of the revival of classic architecture in the 16th century.
4. The propriety of reviving pointed architecture in all modern ecclesiastical buildings.
5. The propriety of reviving Christian sepulchral memorials.
6. The propriety of reviving pointed architecture in civil buildings of every class, considered with reference to climate, arrangement, and destination; with the modifications and alterations that are allowable to suit present necessities.
7. How far the modern mechanical inventions are available in the execution of Christian buildings at the present time.
8. The principles of Christian and pagan sculpture considered, and Christian architecture proved to afford the greatest scope for the exercise of that art.
9. The intimate connection shown betwecn the existing system of government in England and that of our Catholic forefathers.
10. England the most favourable country for the revival of Christian architecture; with reflections on the many glorious remains of Catholic antiquity which it contains.

---

157.

In 1 vol. 8vo, with about 200 wood-cuts, neat in cloth boards, price 8*s*.

## HINTS TO YOUNG ARCHITECTS;

comprising advice to those who, while yet at school, are destined to the profession; to such as, having passed their pupilage, are about to travel; and to those who, having completed their education, are about to practise; together with a Model Specification, &c.

By G. WIGHTWICK, Architect, Author of several Architectural Works.

---

158.

2 vols. 4to, upwards of 70 plates and wood-cuts, price £2. 2*s*.

## LETTERS OF AN ARCHITECT FROM FRANCE, ITALY, AND GREECE:

or, Critical Remarks on Continental Architecture, ancient and modern, and on the Classic Architecture of Greece.

By JOSEPH WOODS, F.A.S., F.L.S., F.G.S., &c., &c.

---

159.

**Tudor Architecture.**

In folio size, price £1. 1*s*. in boards.

## INTERIOR DECORATIONS, DETAILS, AND VIEWS OF SEFTON CHURCH, IN LANCASHIRE.

Erected by the Molineux family (the ancestors of the present Earl of Sefton), in the early part of the reign of Henry VIII.

The plates (34 in number) display the beautiful style of the Tudor age in details, ornaments, sections and views, etched in a masterly style of art.

160.

In one thin 8vo vol., cloth boards, with 8 plates, price 4*s.* 6*d.*

AN ATTEMPT

## TO DETERMINE THE EXACT CHARACTER OF ELIZABETHAN ARCHITECTURE:

illustrated by parallels of DORTON HOUSE, HATFIELD, LONGLEAT, and WOLLATON, in England, and the PALAZZO DELLA CANCELLARIA at Rome.

LIST OF PLATES.

1. Palazzo Della Cancellaria, by Bramante, 1495.—Longleat House, by John of Padua, 1567.
2. Part of Hatfield House, 1611.—Wollaton Hall, by John Thorpe, 1580.
3. Ground plan, &c. of Dorton House, Bucks.
4. Screen in the Hall at Dorton House.
5. Longitudinal section of staircase of do.
6. Transverse section of staircase of do.
7. Chimney-piece in Queen Elizabeth's room, Dorton House.
8. Ceiling in Queen Elizabeth's room, do.

161.

2 vols. folio, bound in 1, with 130 plates, price £4. 4*s.*

MEMORIALS OF

## ANCIENT GERMAN GOTHIC ARCHITECTURE;

OR

## The Architectural Antiquities of Germany.

By GEORGE MOLLER, of Darmstadt, Architect to the Grand Duke of Hesse. With a description of each edifice, and an essay on Gothic architecture, with reference to its origin and progress in England; in the German language, accompanied by an English translation, by W. H. LEEDS.

'The Transition, or Early German, has not yet, so far as I know, received much distinct attention. Dr. Moller, however, in the course of his valuable Denkmaehler, has recently given us excellent representations of the cathedral at Limburg, on the Lahn, which is a very admirable specimen of this kind; and has noticed the intermediate and transition place which this edifice seems to occupy in the development of the German style.'—Whewell on German Churches, p. 25.

'Dr. Moller's work (Denkmaehler der Deutschen Baukunst) already contains excellent specimens of every style of German buildings, and offers additional interest and beauty in each new number.'—Whewell on German Churches, pp. 28, 29.

'The church of St. Catharine, at Oppenheim, near Worms, also in part a ruin, is another fine example of this style, and has been worthily illustrated in the magnificent work of Dr. Moller.'—Ibid. p. 113.

162.

## GRECIAN ORNAMENTS:

a series of examples, in 21 plates, of Grecian Ornament, in royal folio, very finely engraved from drawings made by celebrated architects, price 15*s.*

CONTENTS OF THE WORK.

Details of ceiling of the Propylæa at Eleusis.
Order of antæ of inner vestibules, at Eleusis.
Capital of the antæ at large, at Eleusis.
Fragments found at Eleusis.
Tiles and other details of the Temple of Diana Propylæa, at Eleusis.
Capitals and profile of the Temple of Nemesis, at Rhamnus.
Ornamental moulding, jambs, mouldings of interior cornice, the painted mouldings of the panels of the lacunaria, &c., of the Temple of Nemesis, at Rhamnus.
Details of the roof, tiling, &c., of ditto.
The chairs and sepulchral bas-reliefs found in the cells of the Temple of Themis, at Rhamnus.
Athenian sepulchral marbles, capitals, and triglyphs, at Delos.
Entablature of the order of the peristyle and roof, ornaments, &c., of the Temple of Apollo Epicurus, at Bassæ.
Details of sculptured and painted shafts of columns of the subterraneous chamber at Mycenæ.

Restored elevation to the entrance of the subterraneous chamber at Mycenæ, commonly called the Treasury of Atreus.
Marble stele, in the possession of Mr. Gropius, at Athens.
Terracotta antefixa, at Athens, and marble fragments from Delphi.
Pilaster capitals from Stratonice and Halicarnassus.
Fragments from Halicarnassus, Teos, and Temple of Apollo, at Branchydæ, near Miletus.
Entasis of the columns of the portico of the Propylæa.
Entasis of the north wing of the Propylæa.
——— of the Temple of Theseus.
——— of the Parthenon.
——— of the choragic monument of Lysicrates.
——— of the columns of the north portico of the Triple Temple, termed the Erechtheum.
——— of the columns of the east portico of that Temple.
——— of the Temple of Jupiter Panhellenius.
——— of the columns of the pronaos, do.

This work is very desirable for sculptors, modellers, masons, (in designing for monuments, tombs, tablets, &c.,) builders, and architects. Those who possess the Dilettanti Work of the Unedited Antiquities of Attica, and the supplementary volume of Antiquities of Greece, Sicily, &c., will not need this work, as the subjects are selected from them.

163.

**Domestic Architecture.**

In large 4to, with 19 fine engravings, price £1. 1*s.* extra cloth boards, or on large paper, proof impressions, price £1. 11*s.* 6*d.*

## ARCHITECTURA DOMESTICA.

A series of very neat examples of interiors and exteriors of residences of the gentry erected in Hamburgh and its neighbourhood; principally in the Italian style, with ornamental pleasure-grounds, verandahs, detached cottages, &c., &c.

164.

In demy 12mo, with illustrations, price 2*s.* 6*d.*, Practical Observations made on a Visit to the

## BOTANIC GARDENS, CONSERVATORIES, GARDENS, AND PARKS,

IN LONDON AND ITS VICINITY.

By EDWARD KEMP, Landscape Architect.

165.

In 8vo, with illustrative plates, price 7*s.*

## COTTAGES AND HOUSES FOR THE PEASANTRY AND FOR EMIGRANTS;

ELEMENTARY AND PRACTICAL INSTRUCTIONS ON THE ART OF BUILDING COTTAGES AND HOUSES FOR THE HUMBLER CLASSES:

an easy method of constructing earthen walls, adapted to the erection of dwelling-houses, agricultural and other buildings, surpassing those built of timber in comfort and stability, and equalling those built of brick, and at a considerable saving. To which are added, Practical Treatises on the manufacture of bricks and lime; on the arts of digging wells and draining; rearing and managing a vegetable garden; management of stock, &c. For the use of emigrants; for the better lodging of the peasantry of Great Britain and Ireland; and the improvement of those districts to which the benevolence of landed proprietors is directed.

166.

2nd edition, 4to, engraved on 31 plates, plans and elevations, price 12*s*.

DESIGNS FOR

## VILLAS AND OTHER RURAL BUILDINGS.

By the late EDMUND AIKIN, Architect.

---

**PLATES OF BRIDGES.**

167.

3 feet 6 inches by 2 feet, on a scale of 25 feet to an inch, price £1. 1*s*.

## LONDON BRIDGE:

a large magnificent plate, containing plan and elevation of this great national work, with the very interesting reference of dimensions, materials, time, and cost; engraved in the best style and elaborately finished by J. W. LOWRY, from original drawings and admeasurements.

Constructed by SIR JOHN RENNIE, C.E., F.R.S.

---

168.

Plan and elevation, scale 10 feet to 1 inch, price 10*s*.; on India paper, 15*s*.

## STAINES BRIDGE:

a fine engraving by J. H. LE KEUX, under the direction of B. ALBANO, C.E., from his drawing presented to the Institution of Civil Engineers, and made from the original drawings and admeasurement, with permission of GEORGE RENNIE, Esq., F.R.S., the Engineer.

---

169.

## SECTION OF ST. PAUL'S CATHEDRAL:

the original splendid engraving by GWYN, of the section of St. Paul's Cathedral, decorated agreeably to the original intention of Sir Christopher Wren; a very fine large print, showing distinctly the construction of that magnificent edifice.—Price 10*s*.

This is a magnificent plate, the only one of its kind, showing constructively the genius of Sir Christopher Wren.

---

170.

In 4to, price 12*s*. bound in cloth, illustrated with 26 large plates and 17 wood-cuts.

A MANUAL OF

## WRITING AND PRINTING CHARACTERS,

BOTH ANCIENT AND MODERN.

By B. P. WILME, C.E., M.R.I.A., &c.

## MAPS AND PLANS.

171.

In 4to, half-bound, plates plain £1. 4*s.*, or coloured, half-bound in morocco, price £2.

A HAND BOOK FOR

# MAPPING, ENGINEERING, AND ARCHITECTURAL DRAWING.

By B. P. WILME, C.E., M.R.I.A., &c.

CONTENTS.

1. Map Details,—North points—borders for plans, &c.—map drawing; showing every process from the field-book to the finished map—map engraving—map writing—designs for titles—designs for trees from nature—hill shading—conventional signs used in civil, military, and nautical maps—railway plans and sections.
2. Geological diagrams and sections.
3. Alphabets, ancient and modern, with rules and examples of the mode of constructing them.
4. Architectural drawing, showing also the method of colouring different materials.
5. Stencil plates applied to the lettering of maps and plans, with observations as to their more extended use for colouring the same.
6. Flourishing—examples of.
7. Colours—use of, as pure, compounded into tints, and contrasted.
8. Instruments—mathematical and others, used in map and plan drawing.
9. Specimen plate of highly finished map drawing, exemplified in lithography.
10. Example of surveyor's field-book, and map plotted therefrom.

## RUDIMENTARY SCIENTIFIC WORKS

FOR BEGINNERS.

In course of publication, in a neat and convenient size, a Series of original and useful volumes, by esteemed writers, forming a Rudimentary Course for the easy comprehension of the leading principles of various Sciences.

It has been remarked, that "those who are in the ship of Science ought to remember that the disciples cannot arrive without the aid of boats." Popular treatises are to Science what boats are to large ships; they assist people in getting aboard; but as no one would trust himself to a weak or inefficient boat, so no one ought to begin the study of Science with an imperfect guide. It sometimes happens that popular treatises are made to appear easy by the omission of those very details which are most essential to be known: they state results without going through the necessary processes by which those results are gained: they deal largely in facts, and leave principles untouched.

The only method of avoiding this error is to confide to men, who are masters of their respective subjects, the task of drawing up Popular Introductions to the several branches of Science. The Publisher trusts that the following list of names will be a sufficient guarantee to the Public that what he proposes to attempt in the cause of Popular Instruction will be done well, and that these little treatises will fully answer the purpose for which they are intended, namely, to become convenient and accurate Guide-Books in Government and other Schools, and in Popular Institutions generally, while their low price will place them within the reach of all classes earning their daily bread, to many of whom a knowledge of the elements of Science is a

positive gain in the common pursuits of life, as well as a means of winning from gross tastes, and presenting to the mind noble and worthy objects of study.

172.

1. RUDIMENTARY CHEMISTRY, by Professor Fownes, F.R.S., &c., third edition, and on AGRICULTURAL CHEMISTRY, for the use of Farmers . 1s.
2. ——— NATURAL PHILOSOPHY, by Charles Tomlinson . . . . 1s.
3. ——— GEOLOGY, by Lieut.-Col. Portlock, R.E., F.R.S., F.G.S., &c., second edition . . . . . 1s.
4. ——— MINERALOGY, by D. Varley, Author of 'Conversations on Mineralogy,' 2nd edit. vol. i. . . . . 1s.
5. ——— vol. ii. . . . . 1s.
6. ——— MECHANICS, by Charles Tomlinson, second edition . . . 1s.
7. ——— ELECTRICITY, by Sir William Snow Harris, F.R.S., &c. . . 1s.
8. ——— PNEUMATICS, by Charles Tomlinson . . . . . 1s.
9. ——— CIVIL ENGINEERING, by Henry Law, C.E. vol. i. second edition 1s.
10. ——— vol. ii. do. . 1s.
11. ——— ARCHITECTURE (Orders), by W. H. Leeds, Esq. . . . 1s.
12. ——— DITTO, (Styles—their several examples,) by T. Bury, Archt. . 1s.
13. ——— PRINCIPLES OF DESIGN IN ARCHITECTURE, by E. Lacy Garbett, Architect, vol. i. . . . . 1s.
14. ——— vol. ii. . . . . 1s.
15. ——— PERSPECTIVE, by G. Pyne, Artist, Author of 'Practical Rules in Drawing, for the Operative Builder and Young Student in Architecture,' vol. i. third edition . . . . . 1s.
16. ——— DITTO, vol. ii. third edition . . . . . 1s.
17. ——— ART OF BUILDING, by E. Dobson, C.E., Assoc. Inst. C.E., Author of 'Railways in Belgium' . . . . . 1s.
18. ——— BRICK-MAKING, TILE-MAKING, by the same, vol. i. . 1s.
19. ——— vol. ii. . 1s.
20. ——— MASONRY and STONE-CUTTING, by the same . . 1s.
21. ——— Illustrations of the preceding, in 4to Atlas size, 13 Plates . . . . . 1s.
22. ——— PAINTING, OR A GRAMMAR OF COLOURING, by George Field, Esq. vol. i. . . . . 1s.
23. ——— vol. ii. . . . . 1s.
24. ——— DRAINING DISTRICTS and LANDS . . . . 1s.
25. ——— DRAINING and SEWAGE of BUILDINGS and TOWNS . 1s.
26. ——— WELL-SINKING and BORING, by J. G. Swindell, Architect 1s.
27. ——— USE OF INSTRUMENTS (generally), by J. F. Heather, M.A., of the Royal Military Academy, Woolwich, 2nd ed. 1s.
28. ——— CONSTRUCTING CRANES for the Erection of Buildings and for Hoisting Goods, by J. Glynn, F.R.S., C.E. . . 1s.
29. ——— TREATISE on the STEAM ENGINE, by Dr. Lardner. *(Written specially for this Rudimentary Series.)* . . . . . 1s.
30. ——— ART OF BLASTING ROCKS and QUARRYING, and on STONE, by Major-Gen. Sir John Burgoyne, K.C.B., R.E., &c., &c. . 1s.
31. ——— DICTIONARY OF TERMS used by Architects, Builders, Civil and Mechanical Engineers, Surveyors, Artists, Ship-builders, &c., v. i. 1s.
32. ——— vol. ii. . . . . 1s.
33. ——— vol. iii. . . . . 1s.
34. ——— vol. iv. . . . . 1s.

## SERIES OF RUDIMENTARY WORKS OF MATHEMATICAL SCIENCE FOR BEGINNERS.

The Series of Rudimentary Works for the use of Beginners has realized the anticipated success from that portion of the public who seek the attainment of those objects of Science which belong to the business of life, and the highest and most useful subjects in the Elements of Art and Science. Pursuing the same path, to render further aid to public instruction, and to direct the attention of the Heads and Principals of the several Colleges and Schools of the United Kingdom, and the Royal Military Academies, to these serial works, it is intended to publish an Elementary Course of Mathematics for the use of Beginners and for Practical Men, at 1s. each volume.

It has been observed by Bonnycastle, in the Preface to his admirable Ele-

mentary Work on Algebra, that "Books of Rudiments, concisely written, well-digested, and methodically arranged, are treasures of inestimable value, and too many attempts cannot be made to render them perfect and complete."

## 173.

*The Subjects are as follows: (all are published unless otherwise expressed.)*

35. ELEMENTARY TREATISE ON ARITHMETIC, with numerous Mathematical and Commercial Examples, for Practice and Self-Examination, second edition, corrected, by James Haddon, M. A., King's College. . . . . 1s.
36. A PRACTICAL SYSTEM OF BOOK-KEEPING, with concise Modes of Calculation, Forms of Commercial Documents, in English, French, German, and Italian, Mercantile Phraseology, &c.; forming a complete Introduction to the Counting House, by ditto. . . . . 1s.
37. ELEMENTARY TREATISE ON ALGEBRA, vol. i., by ditto . . . . . 1s.
38. ——— vol. ii., by ditto . . . . . 1s.
39. ——— PRINCIPLES OF GEOMETRY, by Henry Law, C. E. *(in the press)* . 1s.
40. ——— ANALYTICAL GEOMETRY, by James Hann, Professor, King's College . . . . . 1s.
41. RUDIMENTARY TREATISE ON PLANE TRIGONOMETRY, by ditto . . . 1s.
42. ——— SPHERICAL TRIGONOMETRY, by ditto . . . 1s.
43. ELEMENTS AND PRACTICE OF MENSURATION AND GEODESY, by T. Baker, C.E. 1s.
44. RUDIMENTARY TREATISE ON LOGARITHMS, vol. i., by Henry Law, C. E. . 1s.
45. MATHEMATICAL TABLES for facilitating Astronomical, Nautical, Trigonometrical, and Logarithmic Calculations, vol. ii., by ditto . . . . . 1s.
46. ELEMENTARY TREATISE ON POPULAR ASTRONOMY, *(in the press)* . . . 1s.
47. PRINCIPLES AND PRACTICE OF STATICS AND DYNAMICS, by T. Baker, C.E., *(in the press)* . . . . . 1s.
48. THEORY AND PRACTICE OF NAUTICAL ASTRONOMY & NAVIGATION, *(in the press)* 1s.
49. DIFFERENTIAL CALCULUS, in which the Principles will be clearly elucidated, *(in the press)* . . . . . 1s.
50. INTEGRAL CALCULUS, in which the Principles will also be clearly elucidated, *(in the press)* . . . . . 1s.
51. COLLECTION OF EXAMPLES OF THE INTEGRAL CALCULUS, vol. i., by J. Hann, Professor, King's College . . . . . 1s.
52. ——— DIFFERENTIAL do. vol. ii., by J. Haddon, King's College . . . . . 1s.

## 174.

*The whole of the following are published.*

53. RUDIMENTARY TREATISE ON COTTAGE BUILDING; or Hints for Improving Dwellings, by C. B. Allen, Architect . . . . . 1s.
54. ——— TUBULAR BRIDGES, GIRDER BRIDGES, &c., more particularly the Conway and Britannia Bridges, describing the Experiments made to determine their form, strength, and efficiency, together with the construction of the same, the floating and raising the tubes, and other wrought-iron constructions . 1s.
55. ——— ART OF MAKING FOUNDATIONS, CONCRETE WORKS, &c., by E. Dobson, C.E. . . . . 1s.
56. ——— TREATISE ON LIMES, CALCAREOUS CEMENTS, MORTARS, STUCCOES and CONCRETE, by Geo. R. Burnell, C.E. . . . 1s.
57. ——— ART OF LAYING-OUT AND MAKING OF ROADS for New and Old Countries, by H. Law, C.E. . . . . 1s.
58. ——— TREATISE ON THE HISTORY, CONSTRUCTION, AND ILLUMINATIONS OF LIGHTHOUSES, by Alan Stevenson, LL.B., F.R.S.E., M. Inst. C.E., vol. i. . . . . 1s.
59. ——— DITTO, the Continuation of the same subject, vol. ii. . . . 1s.
60. ——— vol. iii. . . . 1s.
61. ——— LAW OF CONTRACTS for Works and Services, by David Gibbons, Esq., Author of Treatises on the 'Law of Dilapidations,' and on the 'Law of Fixtures,' &c. . . . . 1s.
62. ——— ART OF SHIP-BUILDING, THE ELEMENTARY PRINCIPLES, with Plates, by J. Peake, H. M. Naval Architect . . . . 1s.
63. ——— THE PRACTICE, Plates, by the same . 1s.
64. ——— MASTING, MAST-MAKING, AND RIGGING OF SHIPS, by J. Peake, H.M. Naval Architect . . 1s.
65, 66. ——— TREATISE ON NAVIGATION, OR SAILOR'S SEA-BOOK, by J. Greenwood, Esq., B.A.; Flags of all Maritime Nations *(coloured Plates)*, Circular Sailing, &c., DICTIONARY of TERMS, particularly applicable to Naval Architecture, 2 vols. . 2s.

67. RUDIMENTARY TREATISE ON MAGNETISM, by Sir W. S. Harris, F.R.S., vol. i. . 1s.
68. ——— DITTO, the Continuation of the same subject, vol. ii. . . . 1s.
69. ——— SUPPLEMENT to Ditto, vol. iii. . . . . 1s.
70. ——— TREATISE ON THE WARMING AND VENTILATING OF PUBLIC AND PRIVATE BUILDINGS, with Illustrations, by Charles Tomlinson, vol. i. . . . . 1s.
71. ——— DITTO, vol. ii., by the same . . . . . 1s.
72. ——— ART AND PRACTICE of the SURVEYING OF LAND, on the ART OF SURVEYING AND LEVELLING FOR ROAD-MAKING, RAILWAY-MAKING, and the MAKING OF CANALS, &c., by T. Baker, C.E., with Illustrations, vol. i. . . . . 1s.
73. ——— DITTO, also the FIELD BOOK, vol. ii., by the same . . . 1s.
74. ——— TREATISE ON THE CONSTRUCTION OF RAILWAYS, with numerous Illustrations, by Rowland Macdonald Stephenson . . . 1s.
75. ——— ON CLOCKS and WATCH-MAKING, with a Chapter on CHURCH CLOCKS; with Illustrations, by E. B. Denison, M.A., Author of two papers on Clock Escapements, in the Cambridge Philosophical Transactions, vol. i. . . . . 1s.
76. ——— DITTO, vol. ii. . . . . 1s.
77. ——— ELEMENTS of MUSIC, with Plates of Examples, by C. C. Spencer, Professor of Music, vol. i. . . . . 1s.
78. ——— PRACTICE OF MUSIC, with Plates of Examples, by ditto, vol. ii. 1s.
79. ——— AND PRACTICAL TREATISE ON BOILERS, for all kinds of Steam Engines, by Robert Armstrong, with wood-cuts . . . 1s.

## 175.

*The following are not yet published, but are in preparation.*

80. RUDIMENTARY TREATISE ON HYDRAULIC ENGINEERING, and on TUNNELLING through various kinds of Strata, with Plates, forming a third vol. of the Engineering (and completing that subject) published in the First Series, by H. Law, C.E. . . . . 1s.
81, 82. ——— LOCOMOTIVE ENGINES, describing them on the various Railways for their several purposes, and their duty and efficiency, by J. Sewell, L.E., 2 vols. . . . . 2s.
83. ——— MARINE ENGINES AND STEAM-BOATS, for Sailors and Engineers, by R. Murray, C.E. . . . . 1s.
84. ——— CONCHOLOGY, &c. (Fossils and Shells,) by S. W. Woodward, Associate of the Linnæan Society, of the Natural History Department of the British Museum, &c. &c., vol. i. . . . . 1s.
85. ——— Continuation of the same subject, vol. ii. . . 1s.
86. ——— INSTRUCTION on the PIANO-FORTE, by C. C. Spencer, Prof. Mus. 1s.
87. ——— DESCRIPTIVE GEOMETRY, Applicable as a first book, by J. F. Heather, M.A. . . . . 1s.
88. ——— Atlas of Plates, to illustrate the above . 1s.
89. ——— Applied to Architecture (text), by J. F. Heather, M.A. . . . . 1s.
90. ——— Atlas of Plates illustrative (drawing-book), oblong 4to, by J. F. Heather, M.A. . . . . 1s.
91. ——— Applied to Civil Engineering (text), by J. F. Heather, M.A. . . . . 1s.
92. ——— Atlas of Plates illustrative (drawing-book), oblong 4to, by J. F. Heather, M.A. . . . . 1s.
93. ——— Applied to Mechanical Engineering (text), by J. F. Heather, M.A. . . . . 1s.
94. ——— Atlas of Plates illustrative (drawing-book), oblong 4to, by J. F. Heather, M.A.. . . . . 1s.
95. ——— TREATISE ON HARBOURS and COAST ENGINEERING, by Thomas Stevenson, C.E., with Illustrations . . . . . 1s.
96. ——— DITTO, the Continuation of the same subject, vol. ii. . . . 1s.
97. ——— TREATISE ON MILL AND FACTORY ARCHITECTURE, by T. Fairbairn, C.E., with Illustrations . . . . . 1s.
98. ——— DITTO, the Continuation of the same subject, vol. ii. . . . 1s.
99. ——— TREATISE ON THE CONSTRUCTION OF AGRICULTURAL BUILDINGS, of every description, by G. H. Andrews, Agricultural Engineer . . . . . 1s.
100. ——— ON MOTIVE POWERS, AND THE MACHINERY OF THE STEADING, by G. H. Andrews, Agricultural Engineer . . 1s.
101. ——— ON AGRICULTURAL FIELD IMPLEMENTS, by G. H. Andrews, Agricultural Engineer . . . . . 1s.

176.

In 1 vol. demy 12mo, with several wood-cuts, 564 pages in double columns; price in green cloth boards and lettered 5*s*., or in half morocco 6*s*.

## RUDIMENTARY DICTIONARY OF TERMS,

used in Civil and Naval Architecture, Building and Construction, Early and Ecclesiastical Art, Civil and Mechanical Engineering, Fine Art, Mining, Surveying, &c.; to which are added Explanatory Observations on numerous subjects connected with Practical Art and Science.

177.

In 8 vols. folio, very neatly half-bound in morocco, price £27.

## Dugdale's Monasticon Anglicanum.

A HISTORY OF

THE ABBEYS AND OTHER MONASTERIES, HOSPITALS, FRIARIES, AND CATHEDRAL AND COLLEGIATE CHURCHES IN ENGLAND AND WALES;

AND ALL SUCH SCOTCH, IRISH, AND FRENCH MONASTERIES AS WERE IN ANY MANNER CONNECTED WITH THE RELIGIOUS HOUSES IN ENGLAND;

WITH NUMEROUS ADDITIONS.

**Two Hundred and Fifty beautiful Engravings.**

In the absence of the original Charters, Leiger-books, Rolls, and other Documents which have been lost or destroyed since the publication of the Monasticon Anglicanum of Sir William Dugdale, and which are given in that imperishable work, *the Monasticon itself is admitted in all Courts of Law as evidence on disputed points of ownership.* By giving these important documents in full, by recording where such as still exist are deposited, and by placing them in the most lucid order, the editors of the new edition have rendered a service to the landed interest, which is universally acknowledged; and by their industry and zeal, the work has been enriched with numerous and valuable additions. The very copious Index, elaborately compiled by Mr. Richard Taylor, Author of the 'Index Monasticus of the Diocese of Norwich,' will of itself prove the value of the work, as, independent of the religious houses themselves, there is scarcely a single parish in England and Wales which will not be found in the pages of the improved Monasticon.

By the legal profession on all points where questions arise as to the succession to real property, the disputes respecting advowsons, small or great tithes, the rights to fisheries and other privileges, which were formerly conferred upon the religious houses of the middle ages, the pages of Dodsworth and Dugdale, the laborious compilers of the first and second volumes of the 'Monasticon,' Sir Thomas Herbert and Anthony à Wood, the compilers of the third volume of the original edition, have been consulted; and, indeed, there is scarcely any reported case in which the work is not mentioned.

To the clergy the work possesses an interest not only of antiquarian and historical character, but one which has a more solid claim to their notice. There is scarcely a single parish, as already stated, which is not mentioned in the work, and by its means they are frequently enabled to settle, without employing the costly machinery of the law, questions which arise respecting the property of the church, the boundaries of parishes, and the extra-parochial districts of their livings.


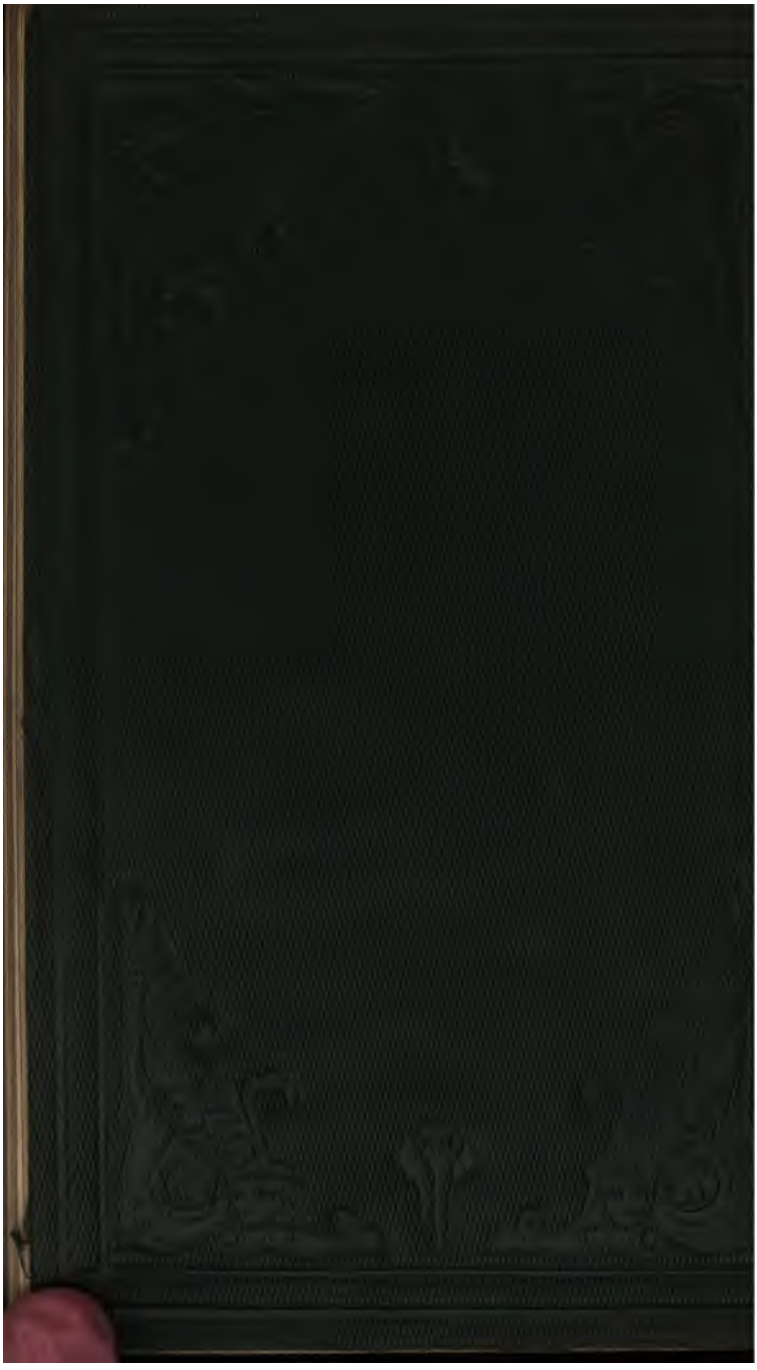
Hughes, Printer, King's Head Court, Gough Square.